
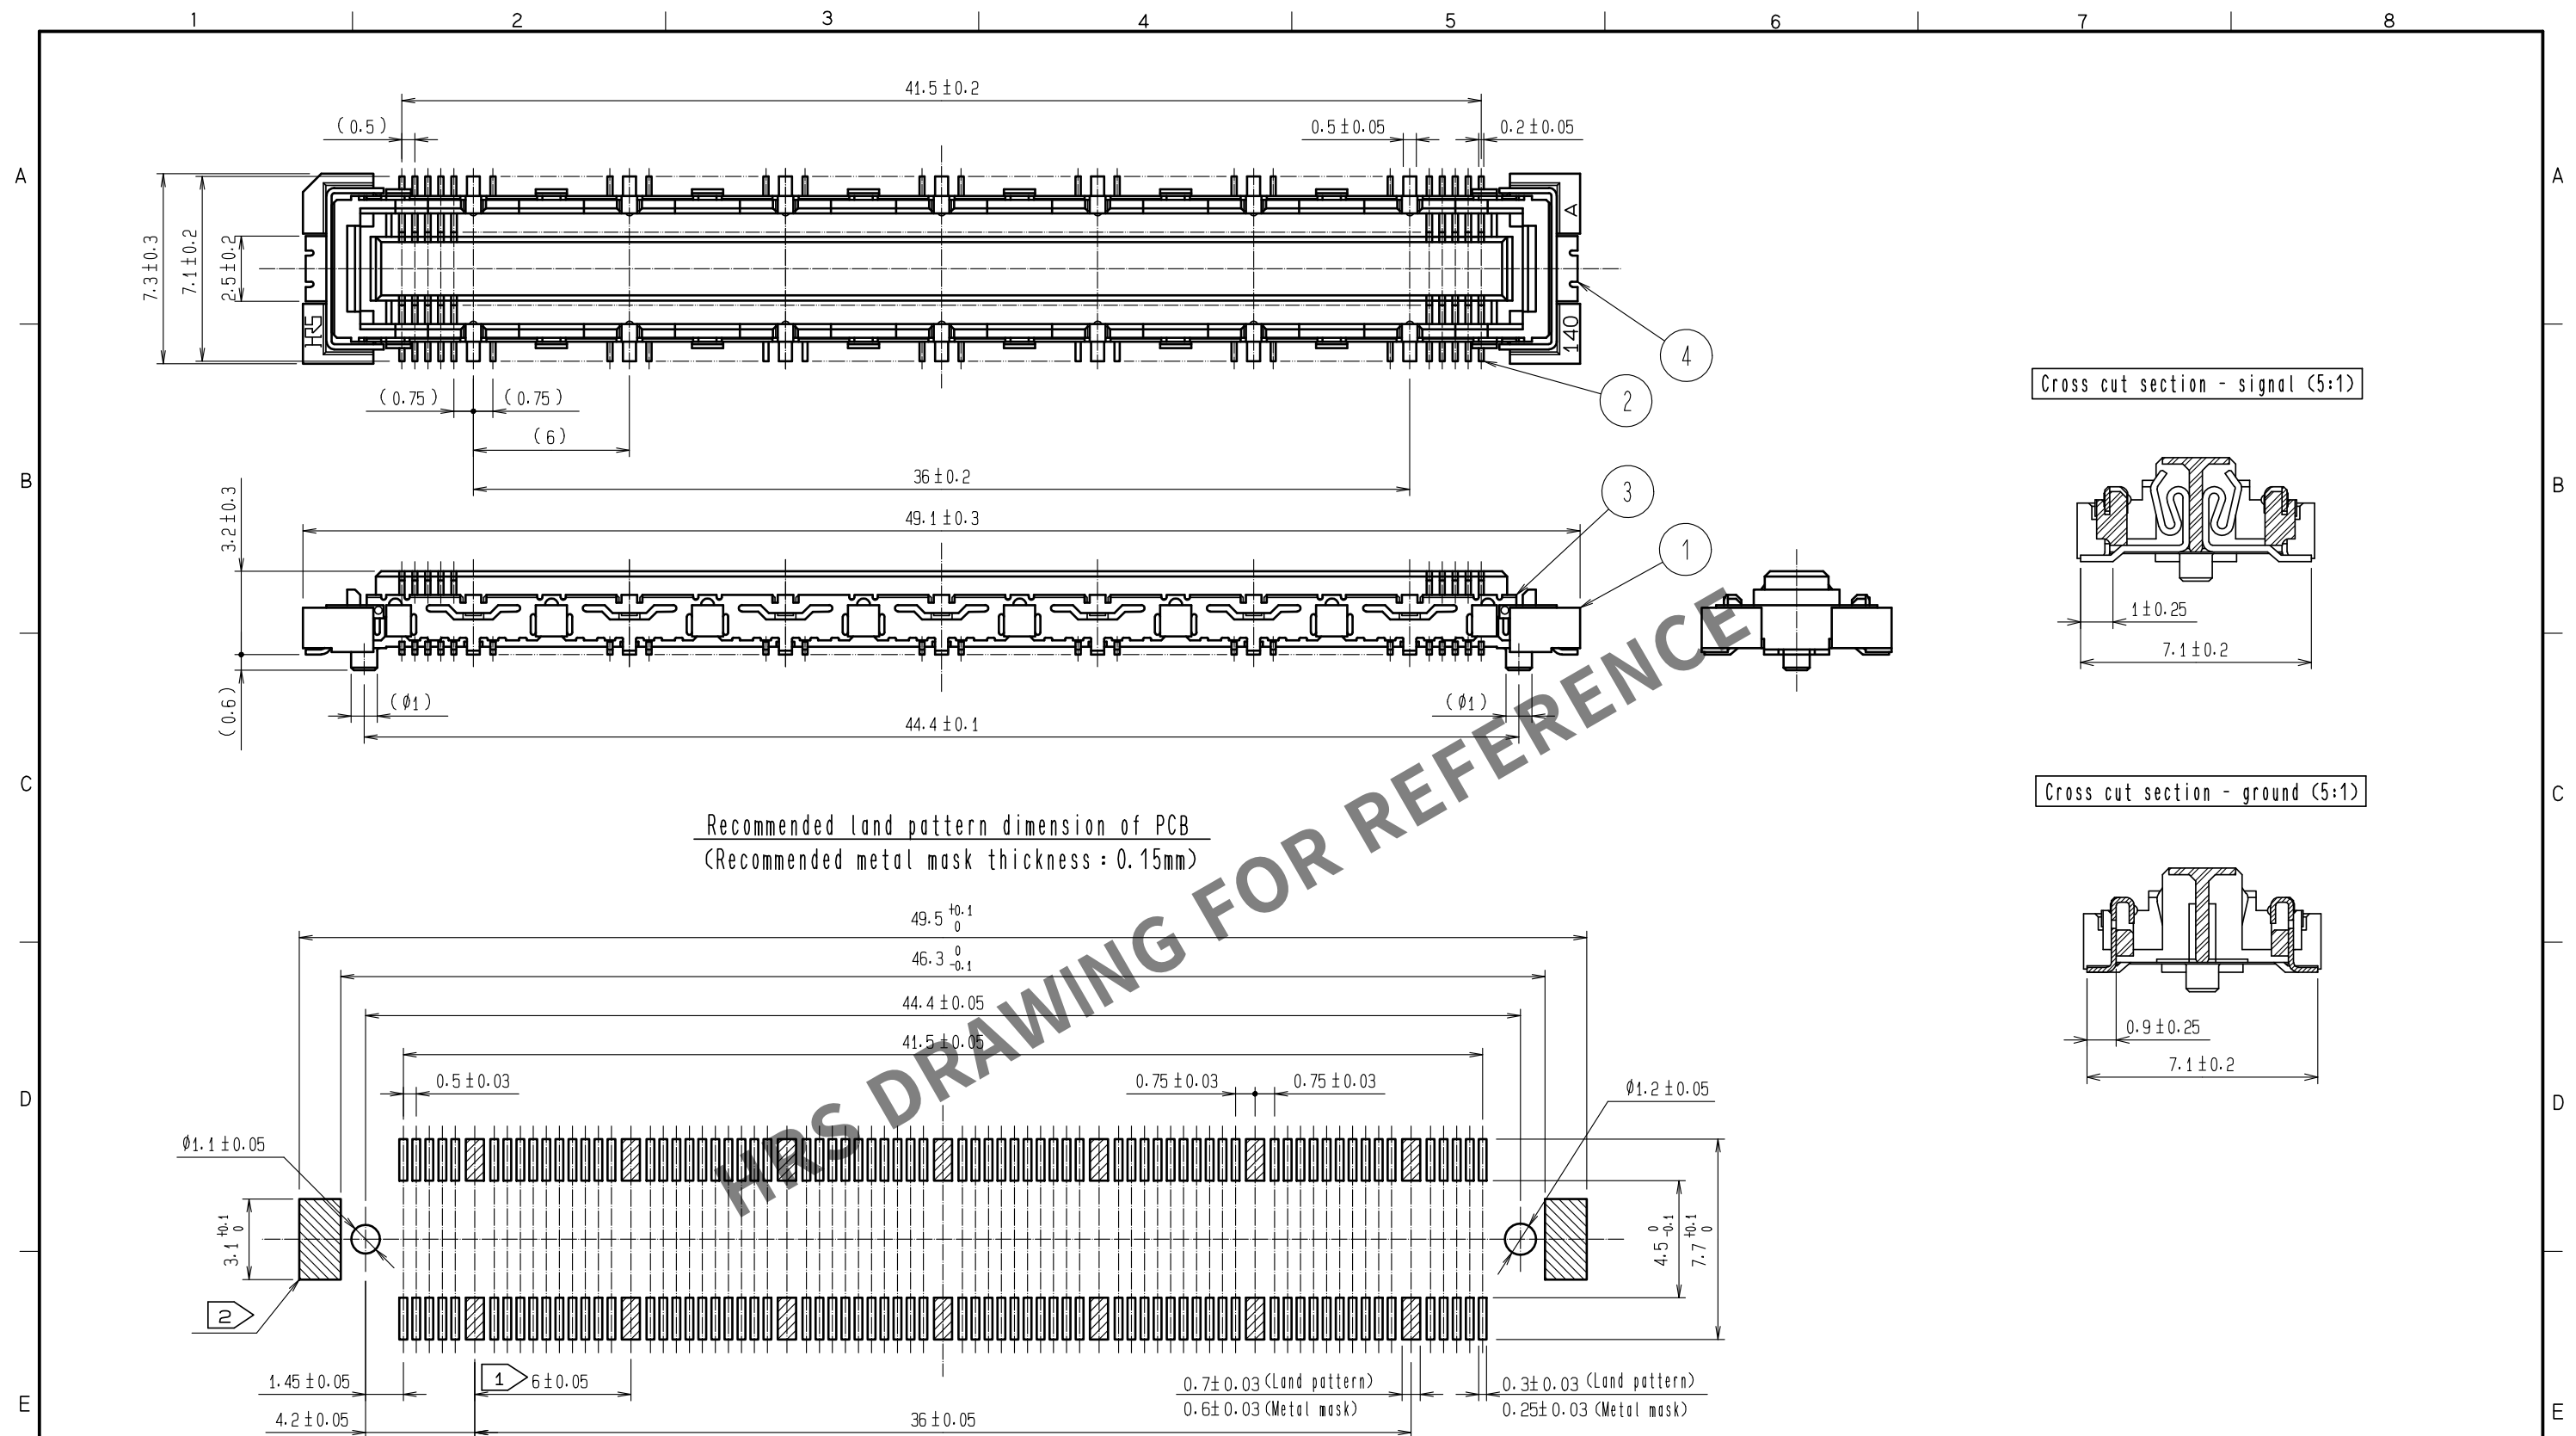




- Notes
- 1 14 hatched  parts : ground circuit.
 - 2 2 hatched  parts : ground circuit.
 - 3 SMT lead - coplanarity : 0.1 max.
 - 4 This product has no polarity to pattern for mounting.
 - 5 Emboss carrier tape package is applied on this product.
Please refer to the sheet 2/2 for the details.
 - 6 The dimensions in parentheses are for reference.





2	Phosphor blonze	Contact area : Gold 0.1 μ m min	6	Polyester	(Top cover tape)
		Lead area : Gold 0.05 μ m min	5	Polyethylene	(Emboss carrier tape)
		Under plating : Nickel 1 μ m min	4	Phosphor blonze	Tin - plating
1	LCP	Beige UL94V-0	3	Phosphor blonze	Tin - plating
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 4 : 1	COUNT  1	DESCRIPTION OF REVISIONS DIS-F-00011032	DESIGNED MT. ITANO	CHECKED HT. YAMAGUCHI	DATE 20211007
-------------	---	----------------	--	--	-----------------------	--------------------------	------------------


 HIROSE ELECTRIC CO., LTD.	APPROVED : HS. OKAWA	20080220	DRAWING NO.	EDC3-151979-21	
	CHECKED : HS. OZAWA	20080220	PART NO.	FX10A-140S/14-SV(91)	
	DESIGNED : SY. KAMIGA	20080220	CODE NO.	CL0570-0204-2-91	
	DRAWN : HK. SUNADORI	20080219		 1/2	

Drawing for packing (2:1)

Reeled dimension (Free)

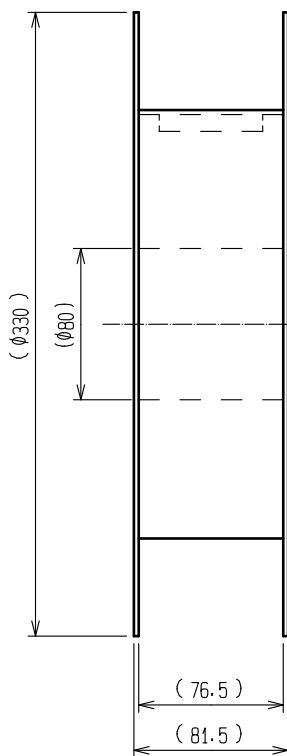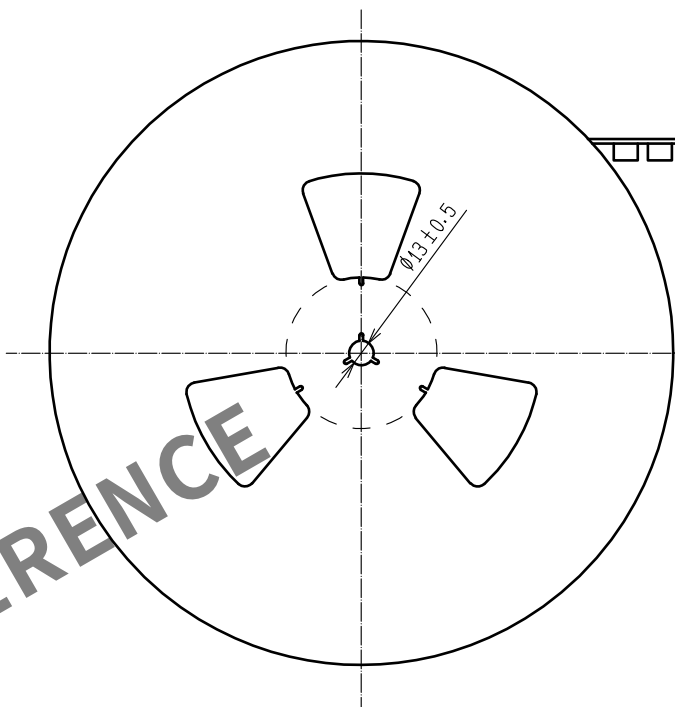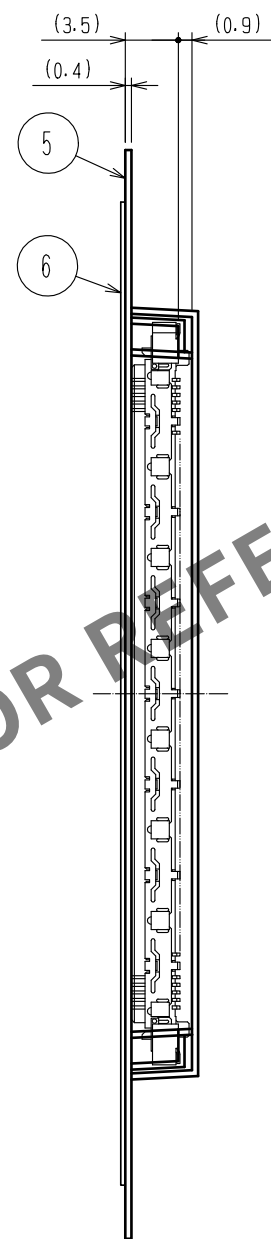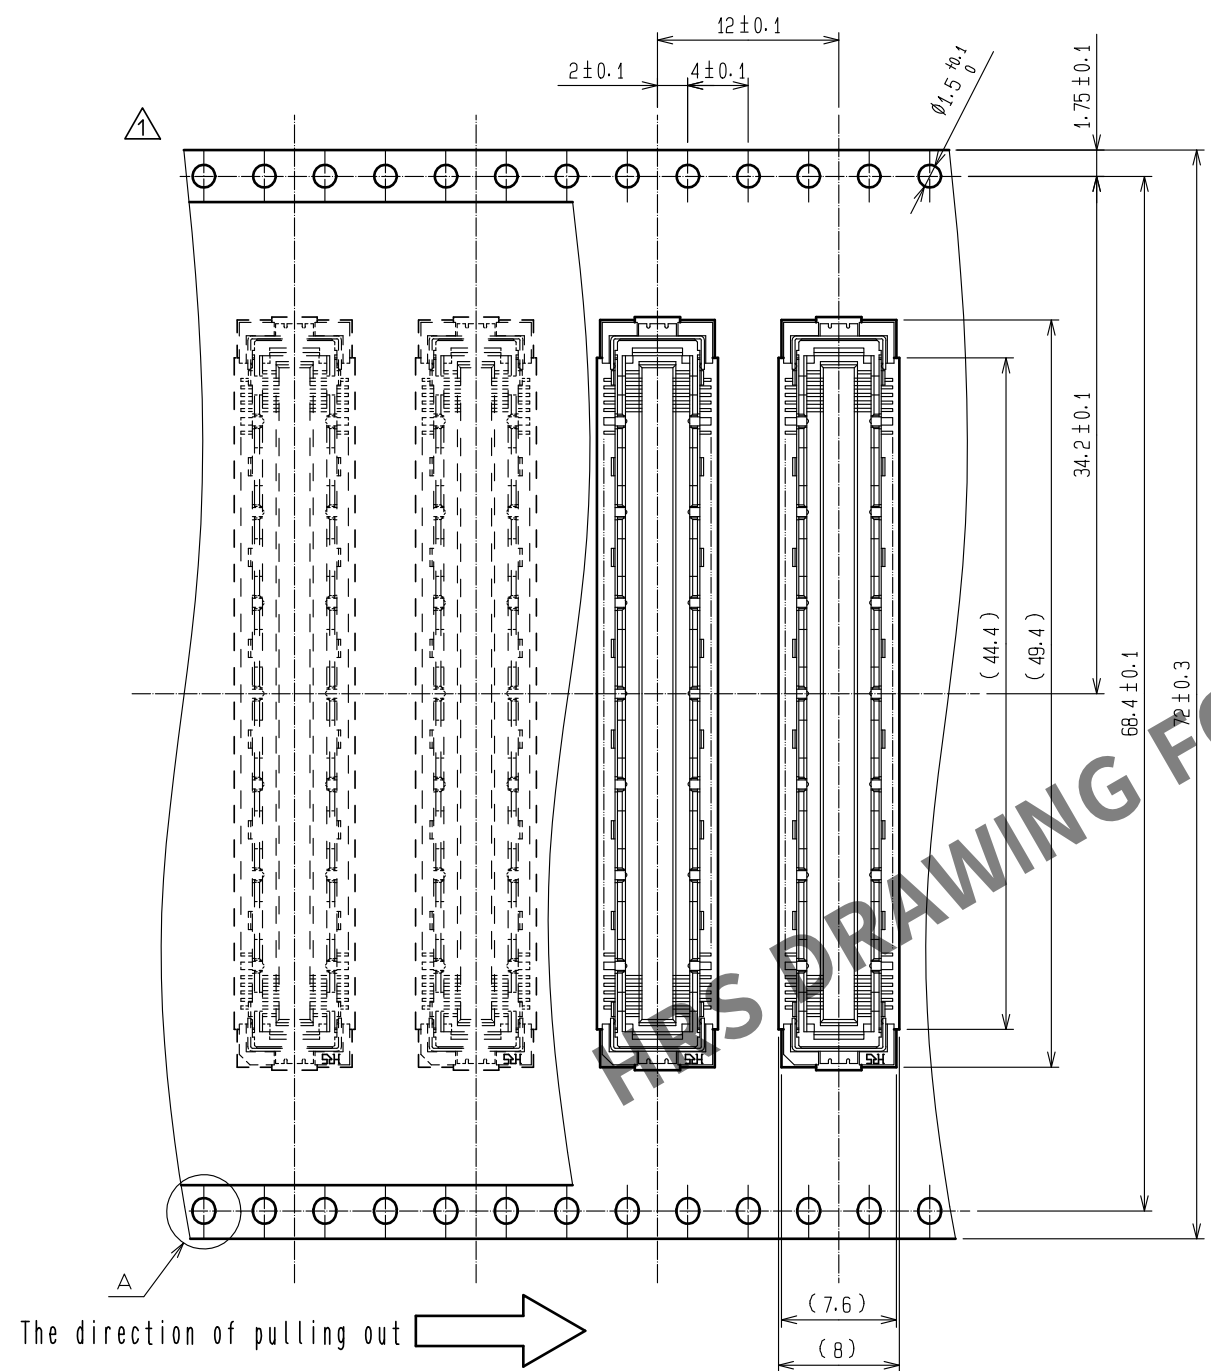

A (5:1)



- Notes
- 7 1 reel : 1,000 connectors.
 - 8 Minimum 10 compartments from both reel ends remain empty.
 - 9 This product has no polavity to tape and reel packaging.
 - 10 The dimensions in parentheses are for reference.

HRS

DRAWING NO.	EDC3-151979-21
PART NO.	FX10A-140S/14-SV(91)
CODE NO.	CL0570-0204-2-91

2/2