
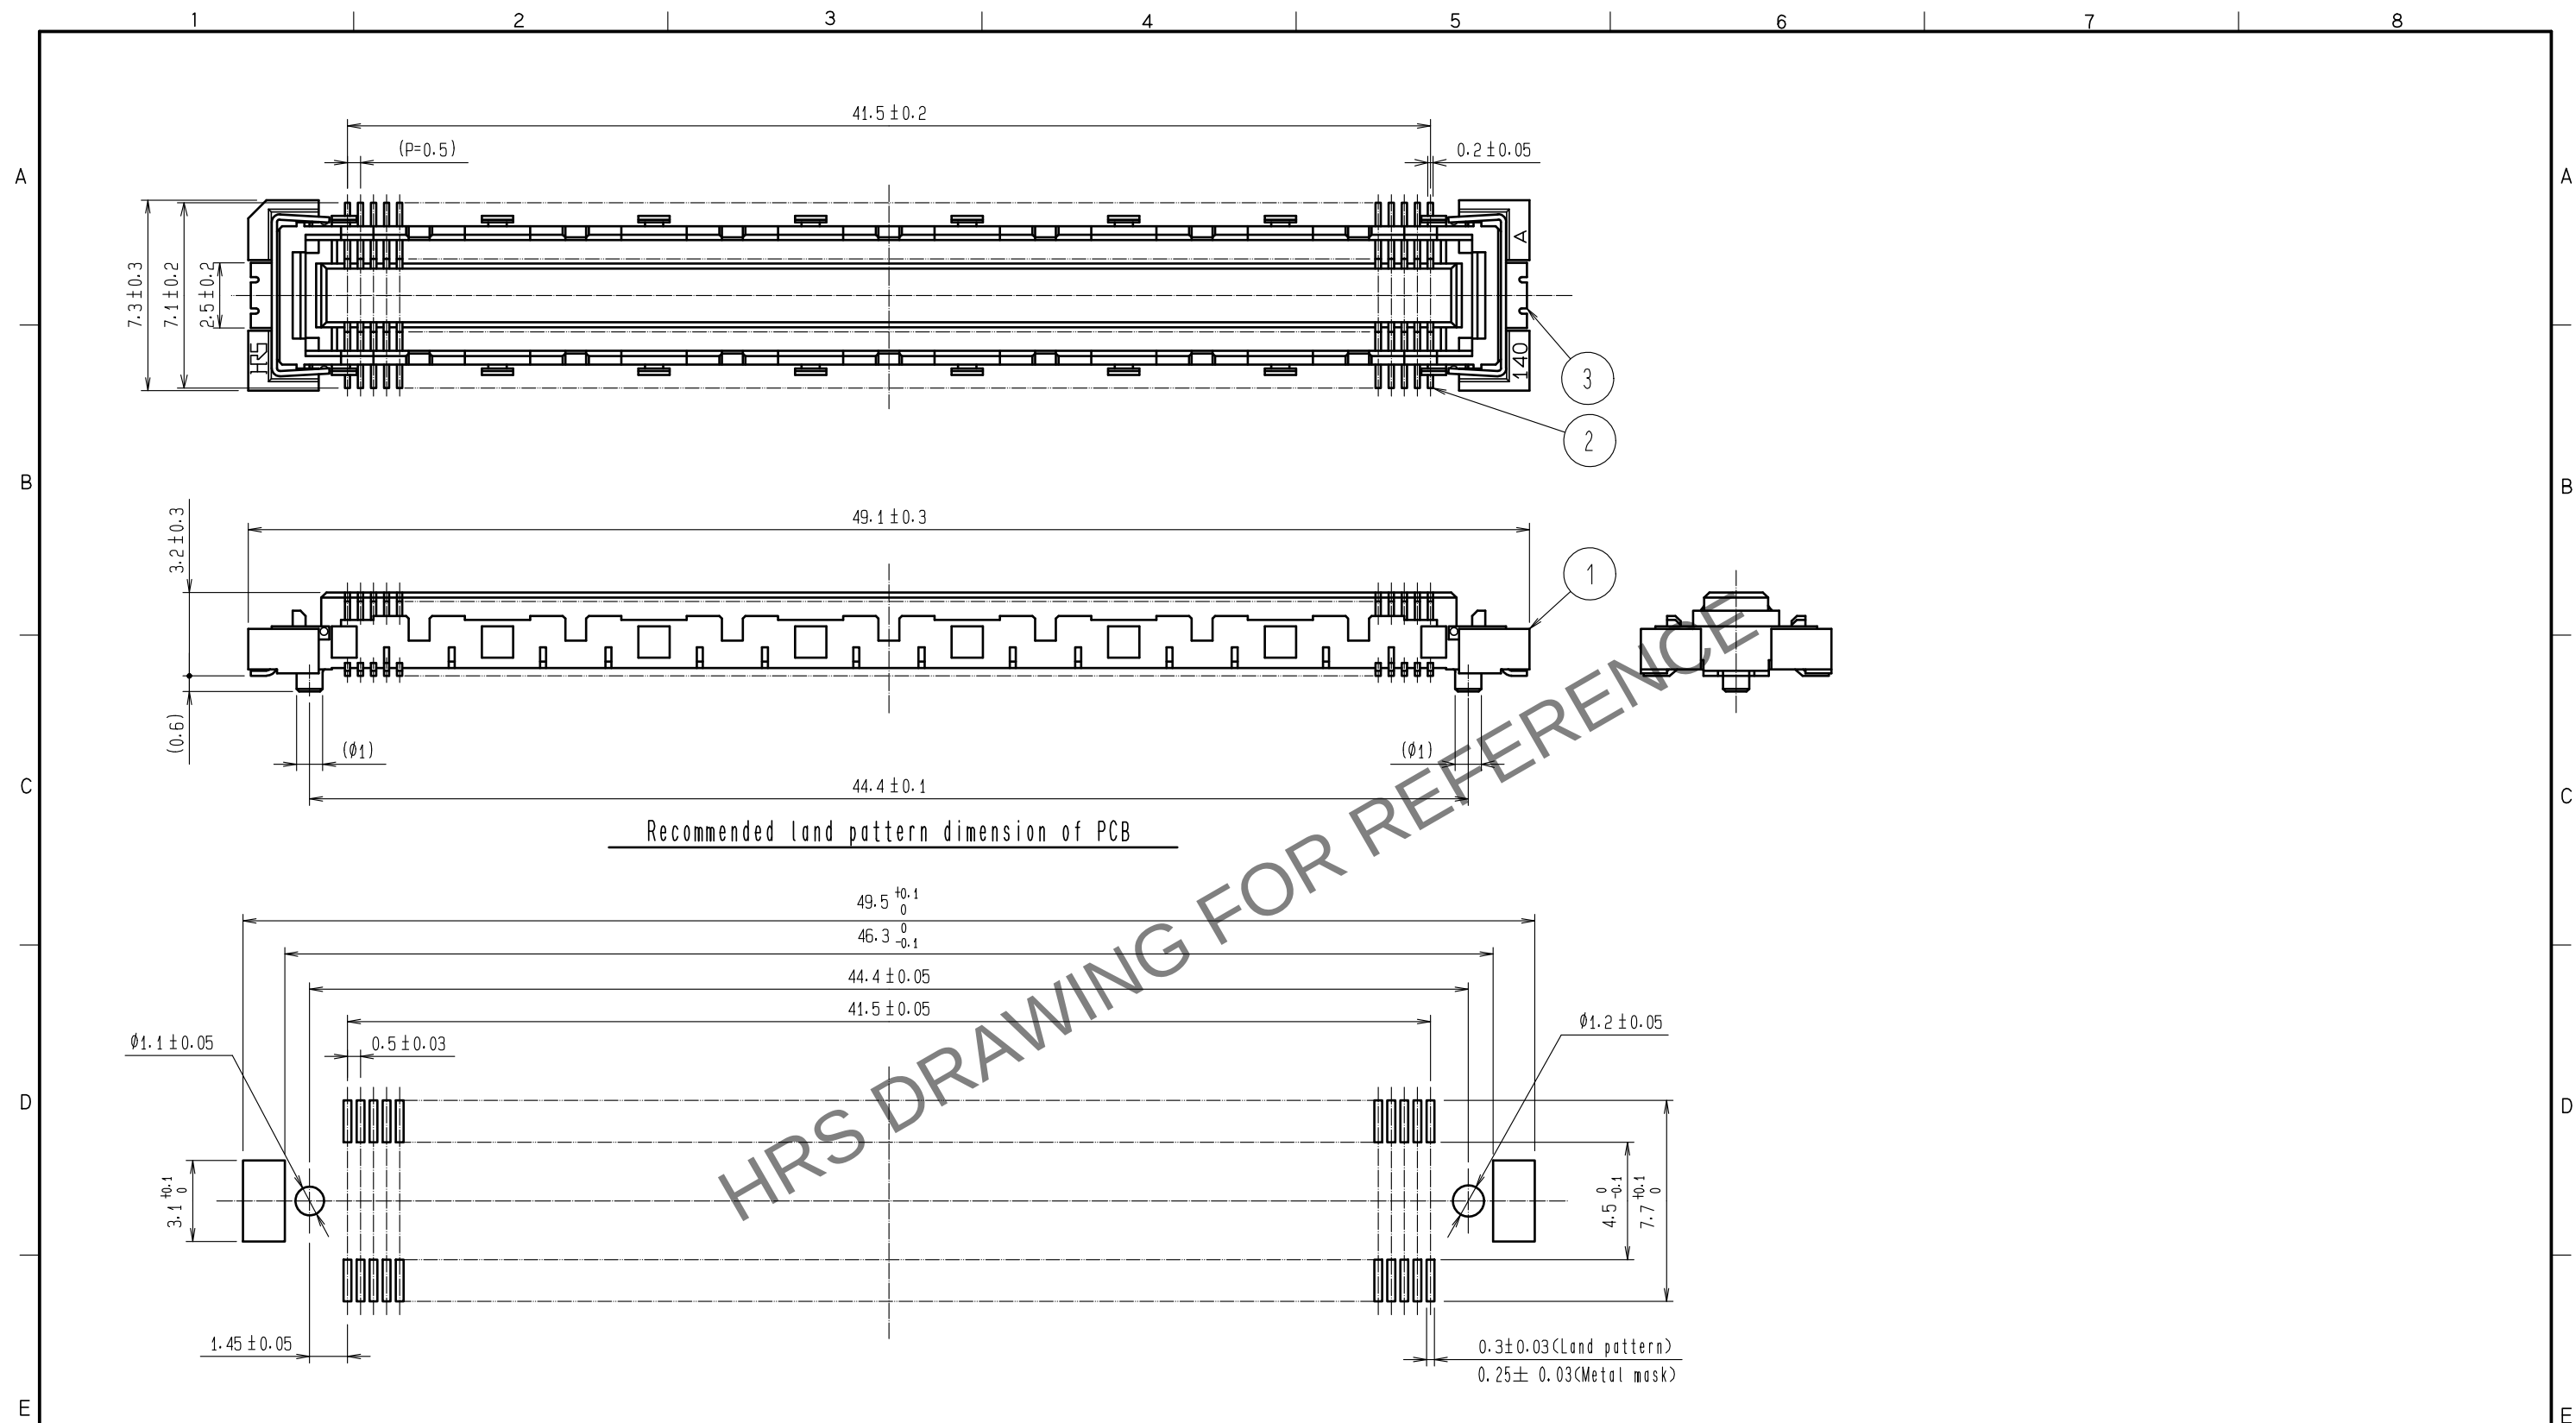





- | | | |
|-------|---|---|
| Notes | 1 | SMT lead - coplanarity : 0.1 max. |
| | 2 | This product has no polarity to pattern for mounting. |
| | 3 | Emboss carrier tape package is applied on this product.
Please refer to the sheet 2/2 for the details. |


2	Phosphor blonze	Contact area : Gold 0.1 μ m min		5	Polyester	(Top cover tape)	
		Lead : Gold 0.05 μ m min					
		Under plating : Nickel 1 μ m min					
1	LCP	Beige UL94V-0		3	Phosphor blonze	Tin - plating	
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 4 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00011032	DESIGNED MT. ITANO	CHECKED HT. YAMAGUCHI	DATE 20211007
 HIROSE ELECTRIC CO., LTD.		APPROVED : KJ. KATAYOSE		20050105		DRAWING NO. EDC3-151987-01		
		CHECKED : HS. OKAWA		20050105		PART NO. FX10A-168S-SV(21)		
		DESIGNED : KT. DOI		20050105		CODE NO. CL0570-0244-7-21		
		DRAWN : KT. DOI		20050105				
					 			



Drawing for packing (2:1)

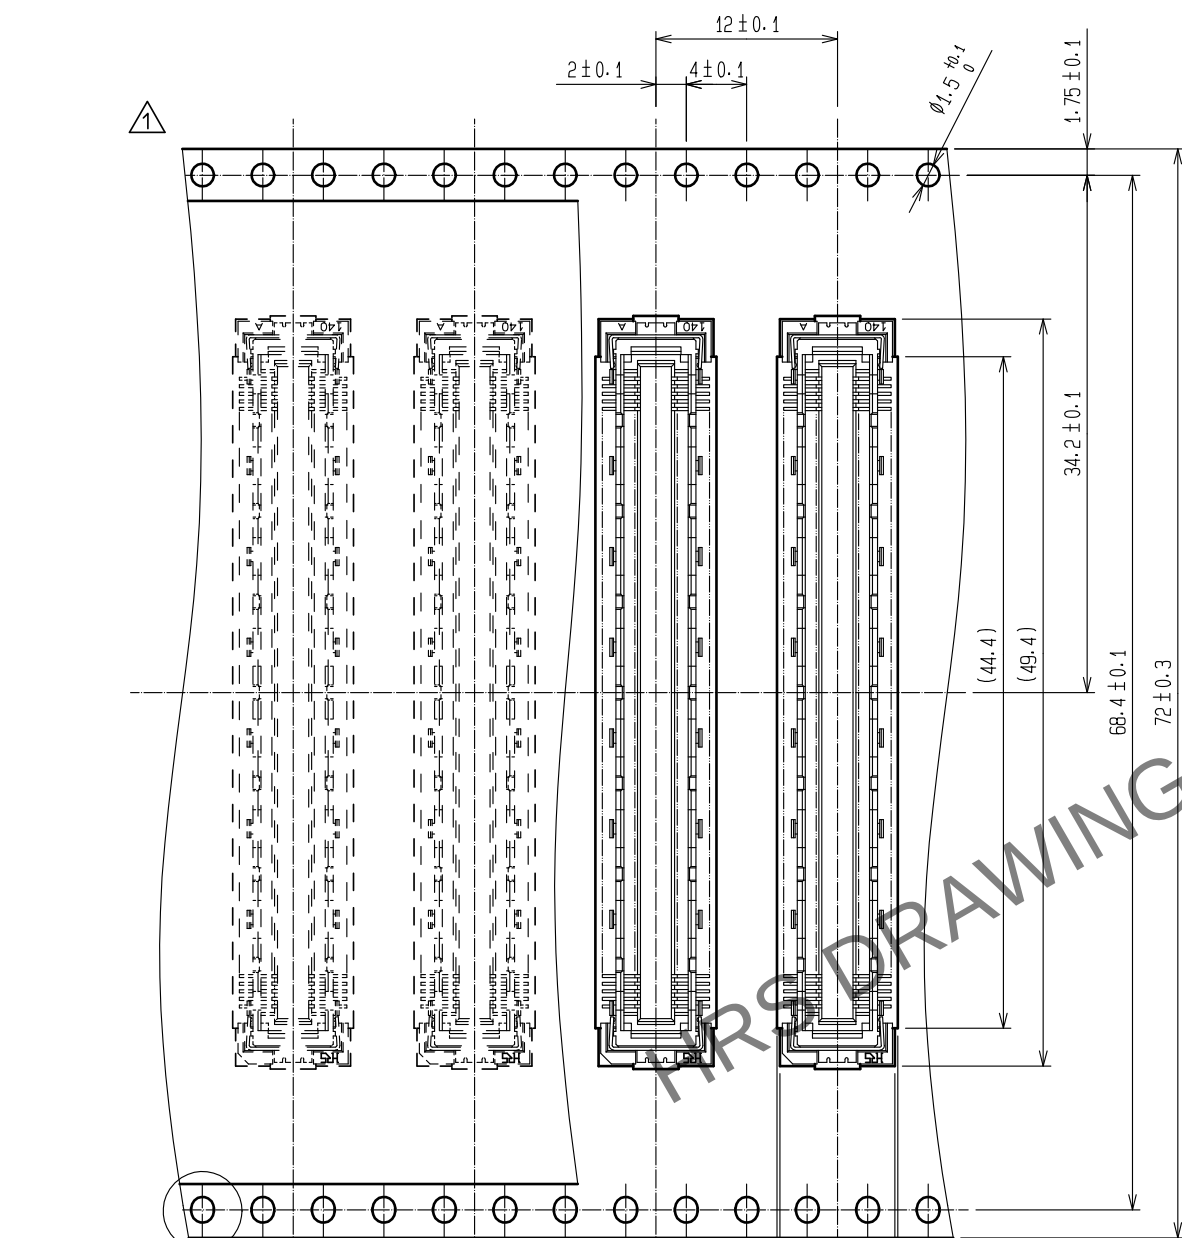



The direction of pulling out



A (5:1)

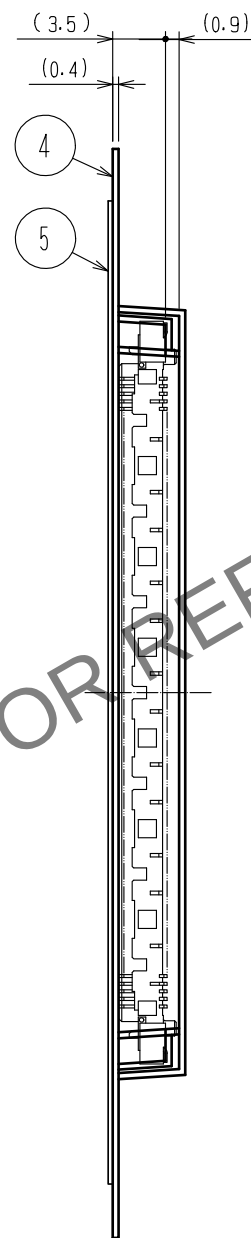

Reeled dimension (Free)

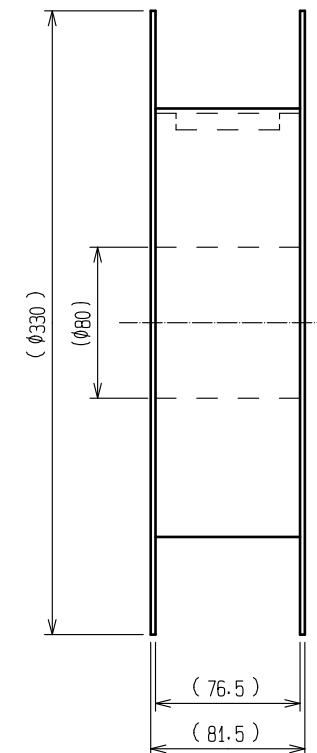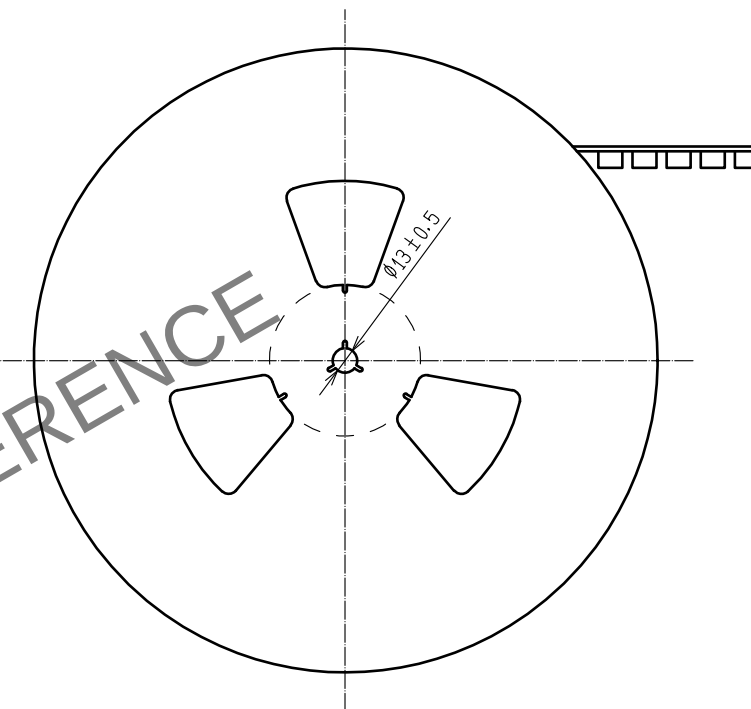

- Notes
- 4 1 reel : 1,000 connectors.
 - 5 Minimum 10 compartments from both reel ends remain empty.
 - 6 This product has no polarity to tape and reel packaging.
 - 7 The dimensions in parentheses are for reference.

HRS

DRAWING NO.	EDC3-151987-01
PART NO.	FX10A-168S-SV(21)
CODE NO.	CL0570-0244-7-21

1/2