



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

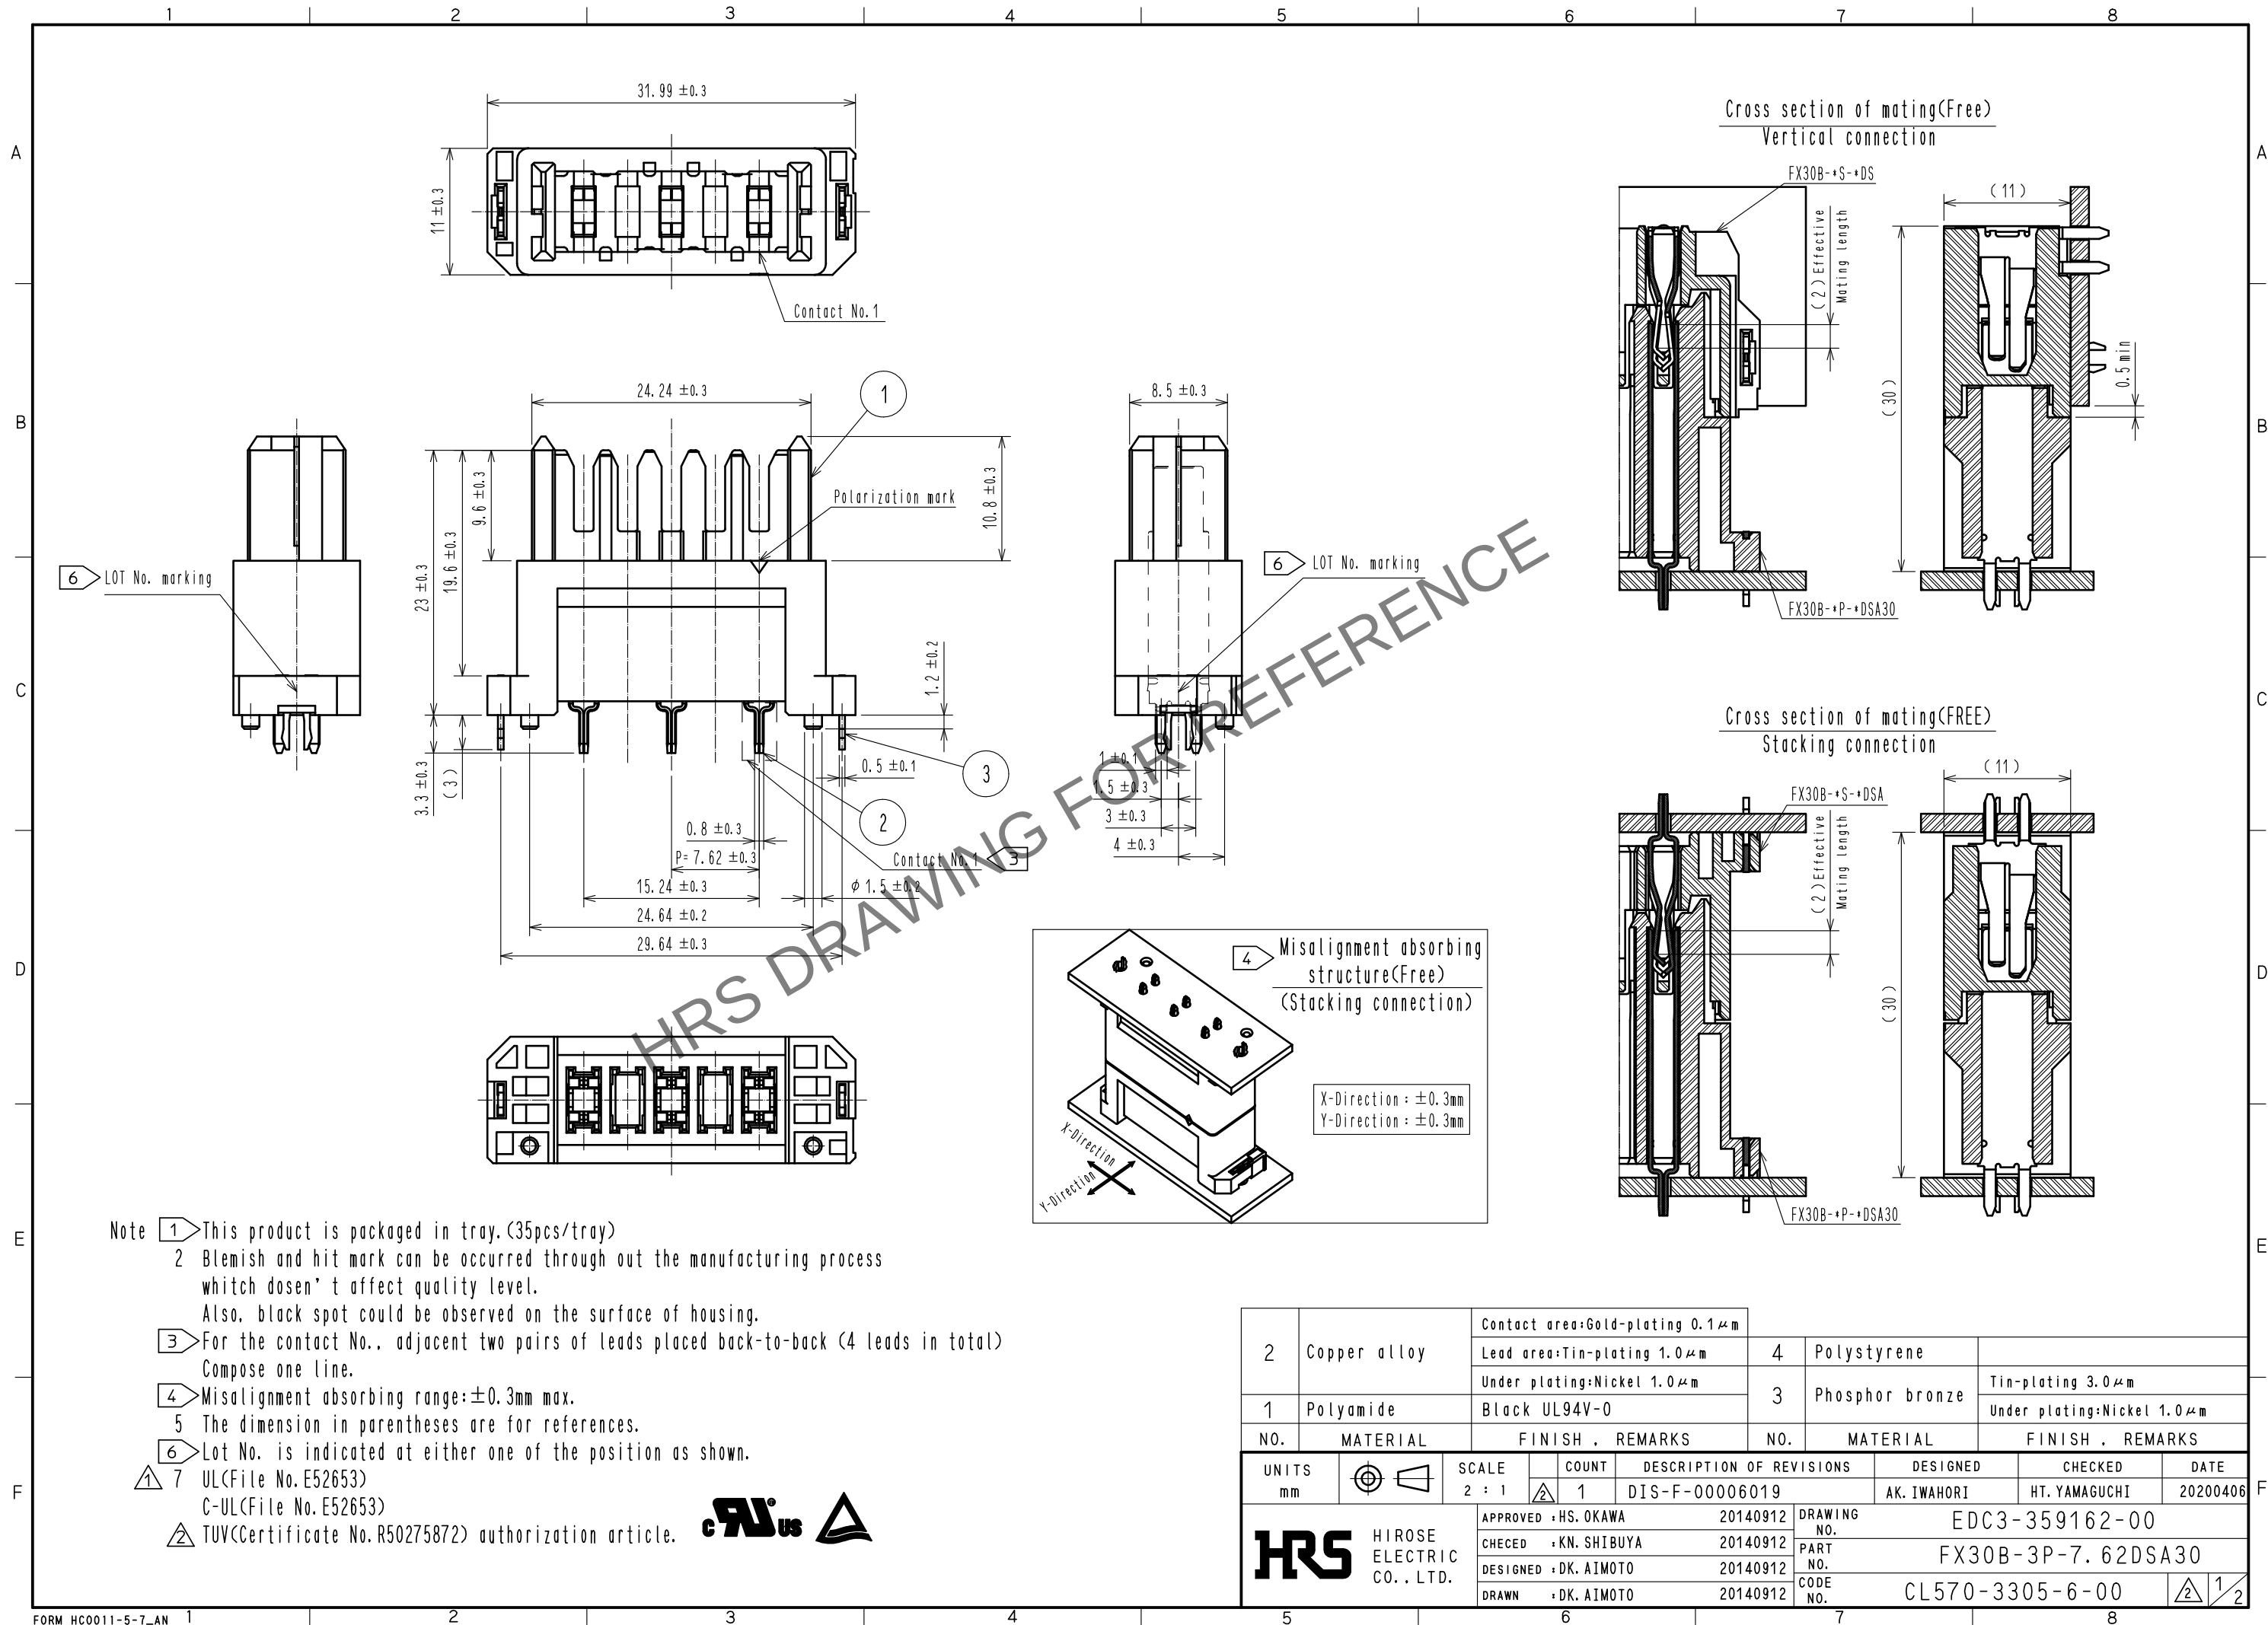


2	Copper alloy	Contact area:Gold-plating 0.1μm	4	Polystyrene	Tin-plating 3.0μm Under plating:Nickel 1.0μm
		Lead area:Tin-plating 1.0μm			
		Under plating:Nickel 1.0μm			
1	Polyamide	Black UL94V-0	3	Phosphor bronze	Under plating:Nickel 1.0μm
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00006019	DESIGNED AK. IWAHORI
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	20140912	DRAWING NO.	EDC3-359162-00
		CHECKED : KN. SHIBUYA	20140912	PART NO.	FX30B-3P-7.62DSA30
		DESIGNED : DK. AIMOTO	20140912	CODE NO.	CL570-3305-6-00
		DRAWN : DK. AIMOTO	20140912		
		DATE	20200406		


Recommended hole pattern dimension of PCB(5:1)
(Connector mounting side, PCB thickness: t=1.6mm)

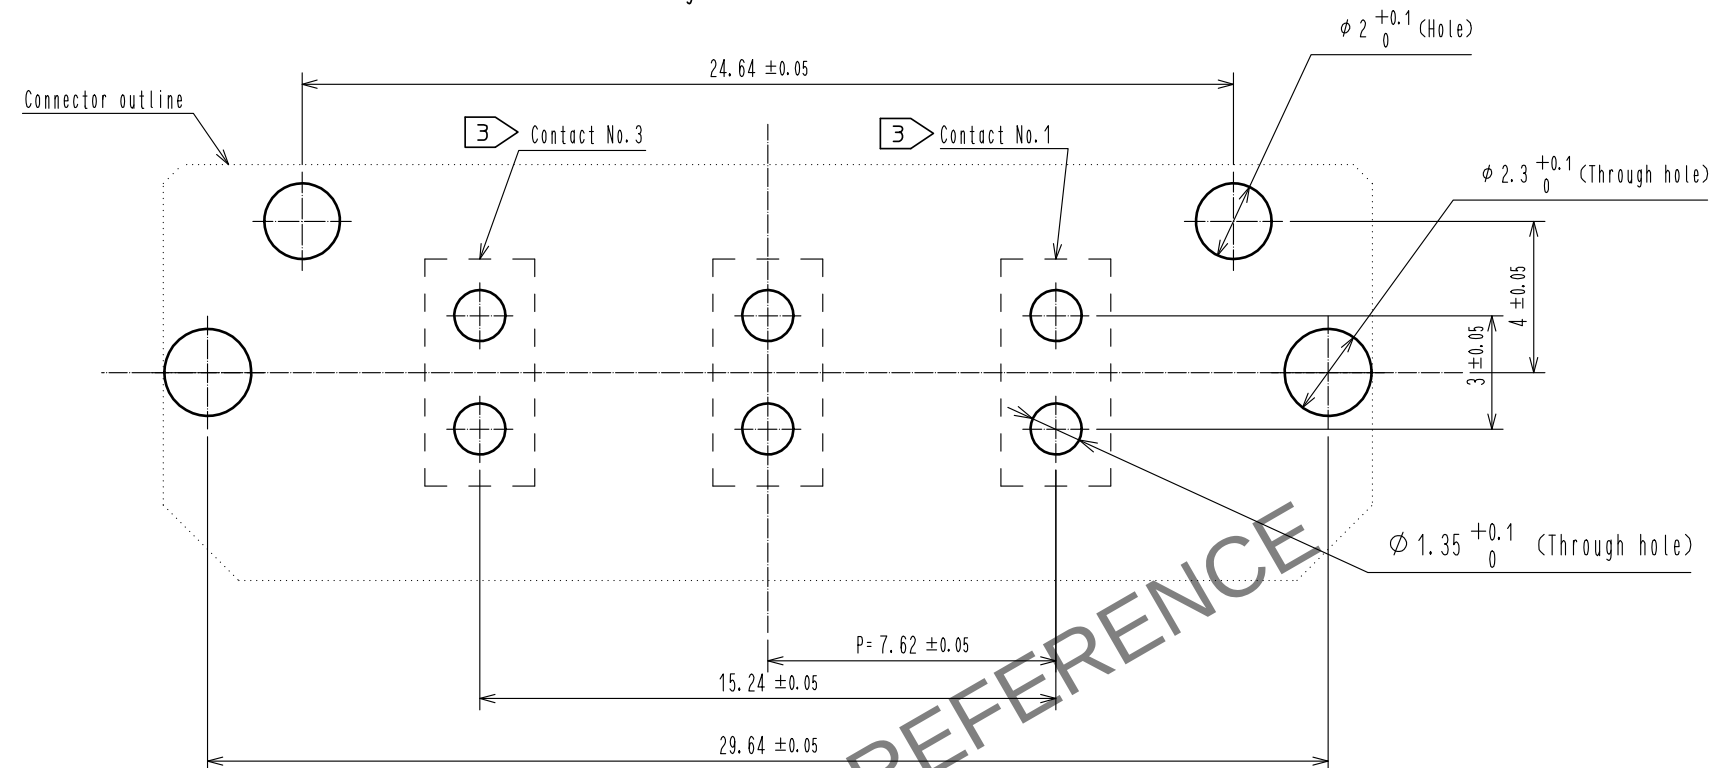

1 Drawing for packaging(1:2)

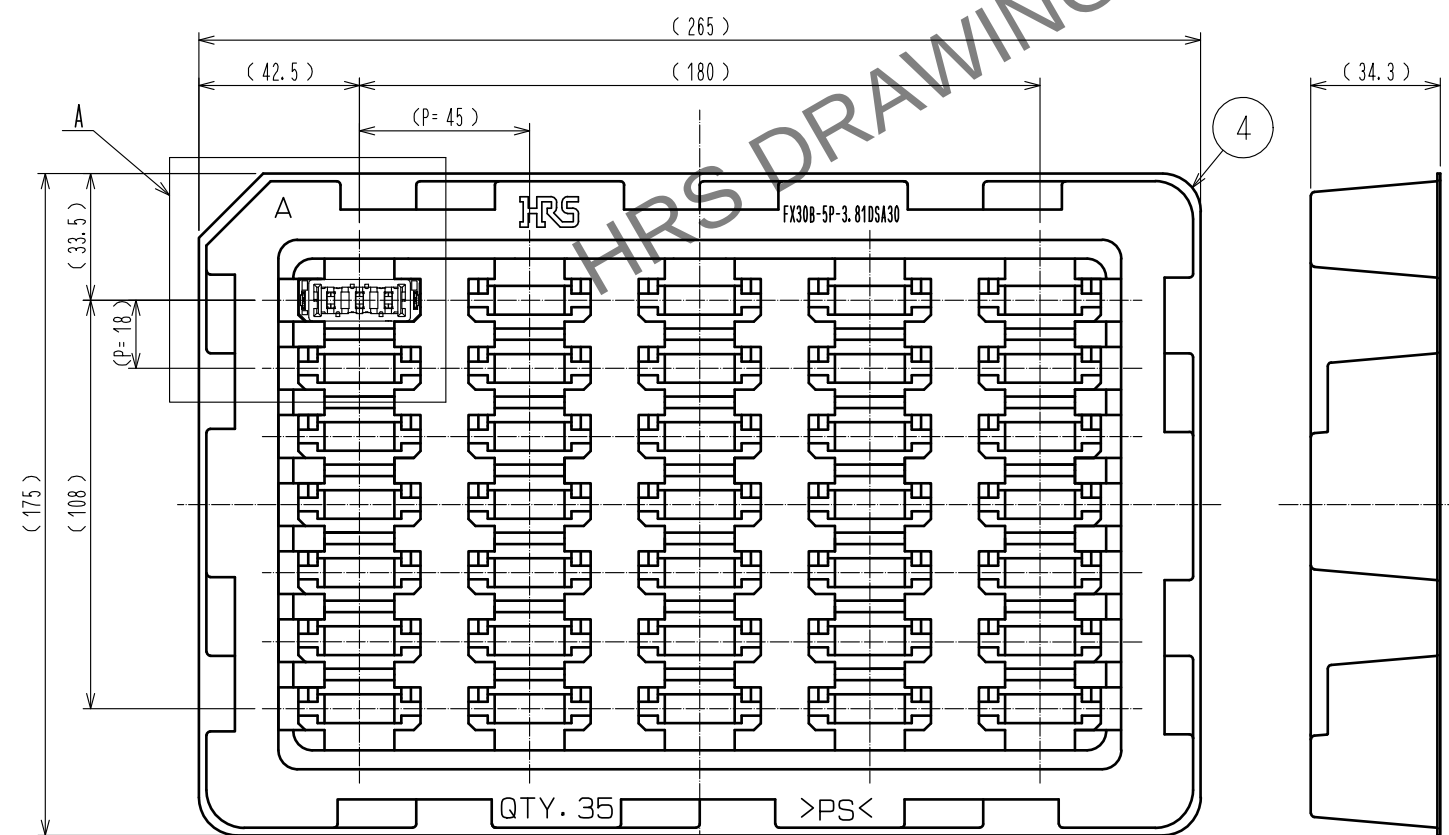

A(1:1)

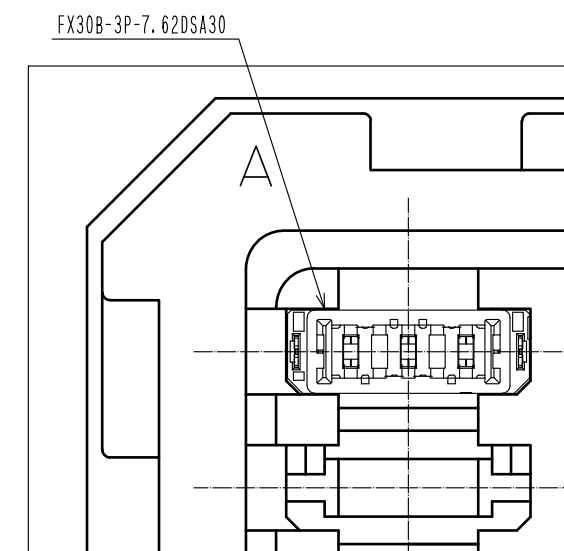

HRS

DRAWING NO.	EDC3-359162-00
PART NO.	FX30B-3P-7.62DSA30
CODE NO.	CL570-3305-6-00

2/2