

				2		PHOSPHOR BRONZE		Contact area : Gold 0.1μm min.	
								Lead area : Gold flash	
								Under plating : Nickel 0.5μm min.	
1		POLYPHENYLENE SULFIDE		Light brown (CUL94V-0)					
NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL	
								FINISH . REMARKS	
UNITS mm				SCALE 5 : 1		COUNT 1		DESCRIPTION OF REVISIONS	
						DIS-F-00006410		DESIGNED KS. NAKAJIMA	
								CHECKED HT. YAMAGUCHI	
								DATE 20200803	
		HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		20050903		DRAWING NO. EDC-150566-71-25	
				CHECKED : HS. OZAWA		20050903		PART NO. FX8-100P-SV(71)	
				DESIGNED : TH. NODA		20050902		CODE NO. CL578-0005-7-71	
				DRAWN : TH. NODA		20050902		1/2	



Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【Precaution】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

NG

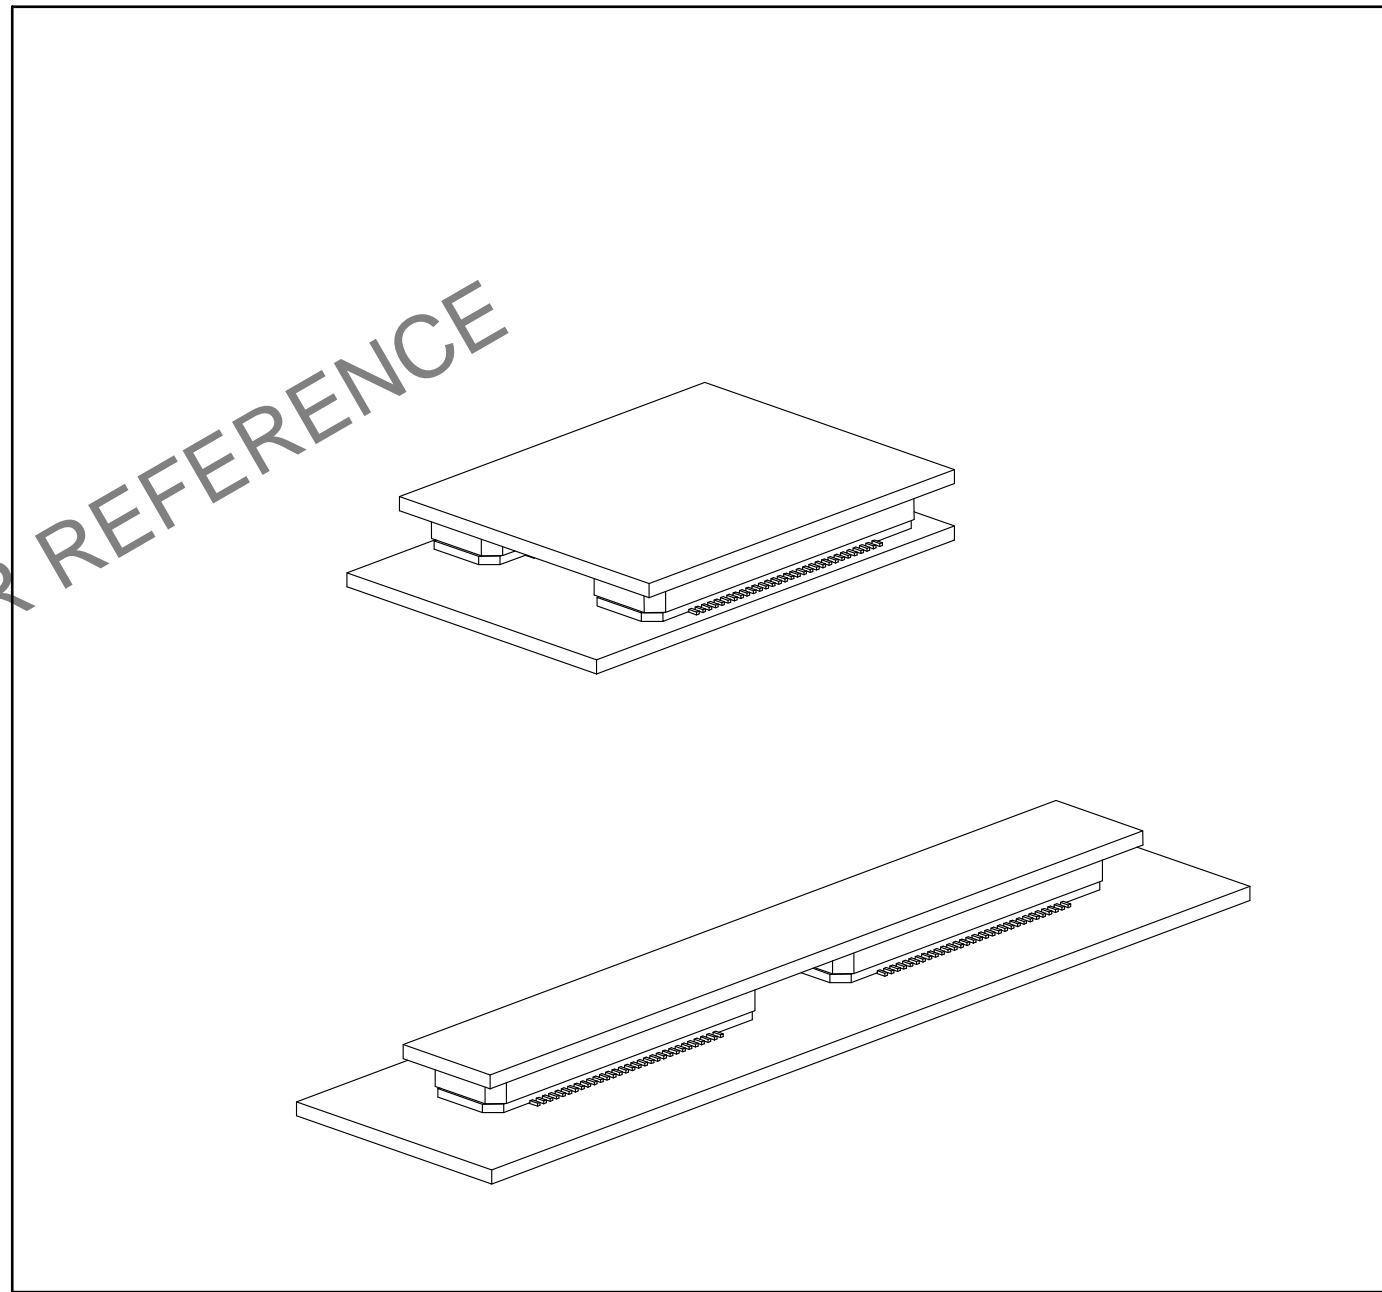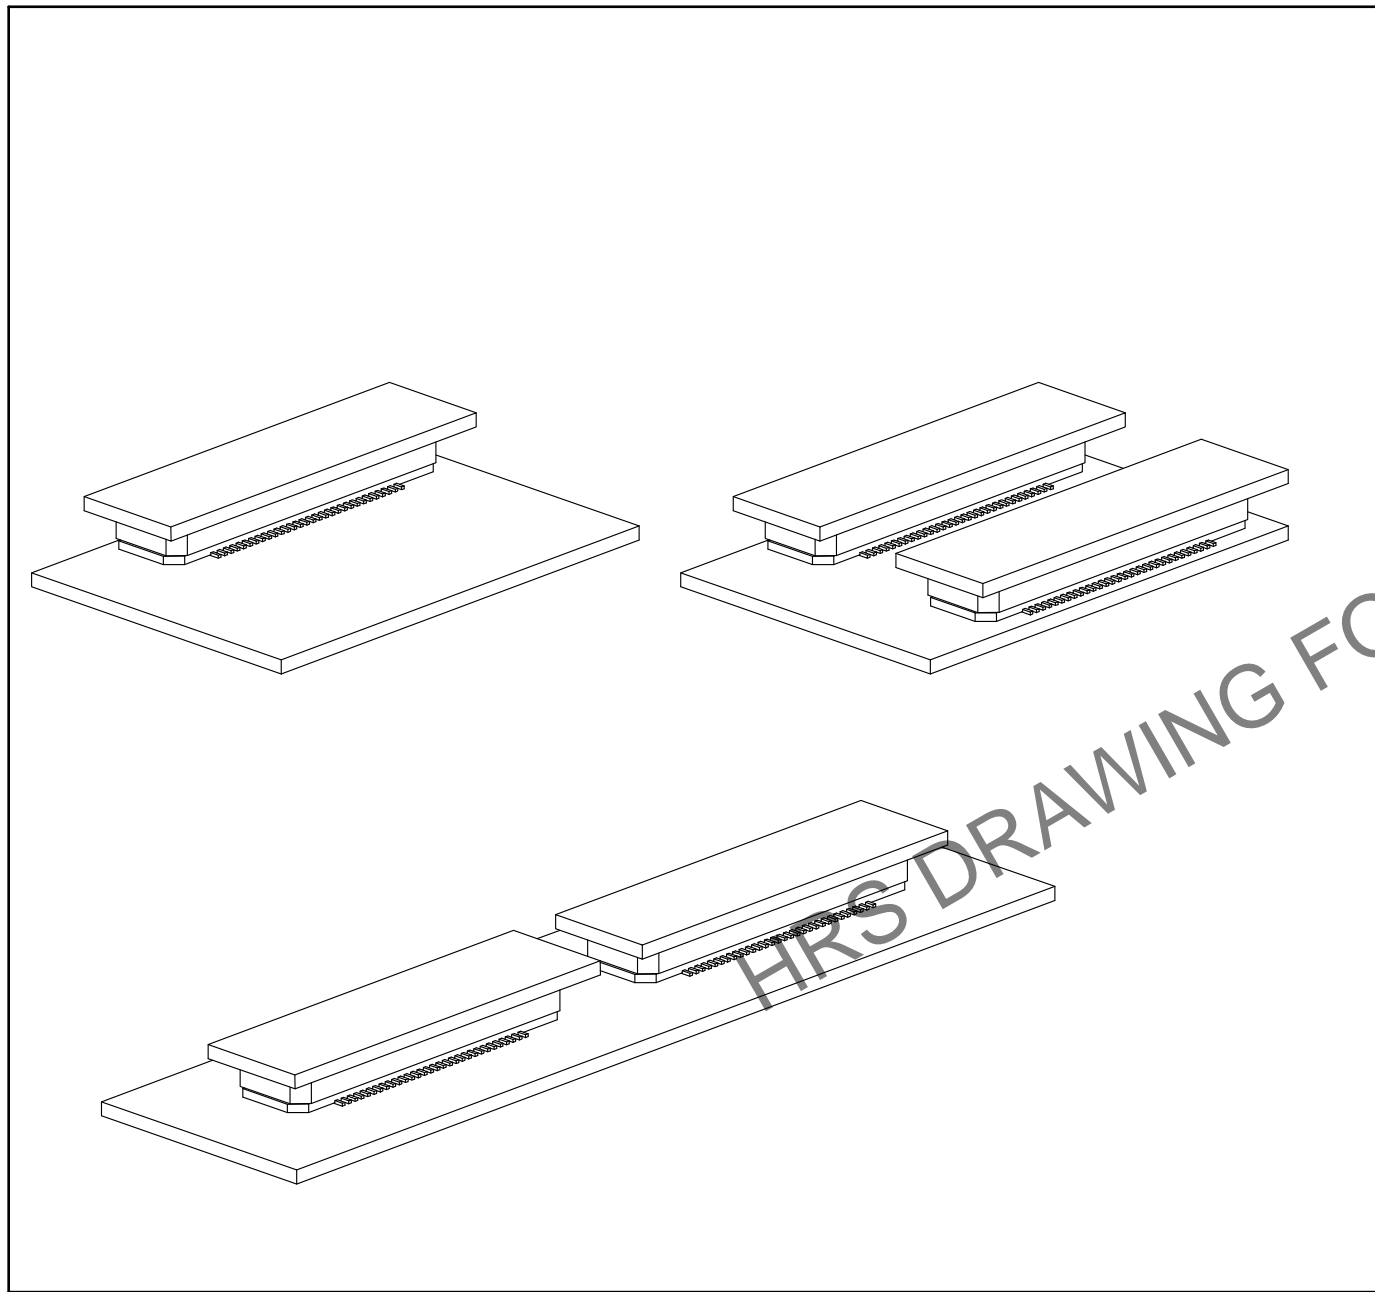

HRS

DRAWING NO.	EDC-150566-71-25
PART NO.	FX8-100P-SV(71)
CODE NO.	CL578-0005-7-71