

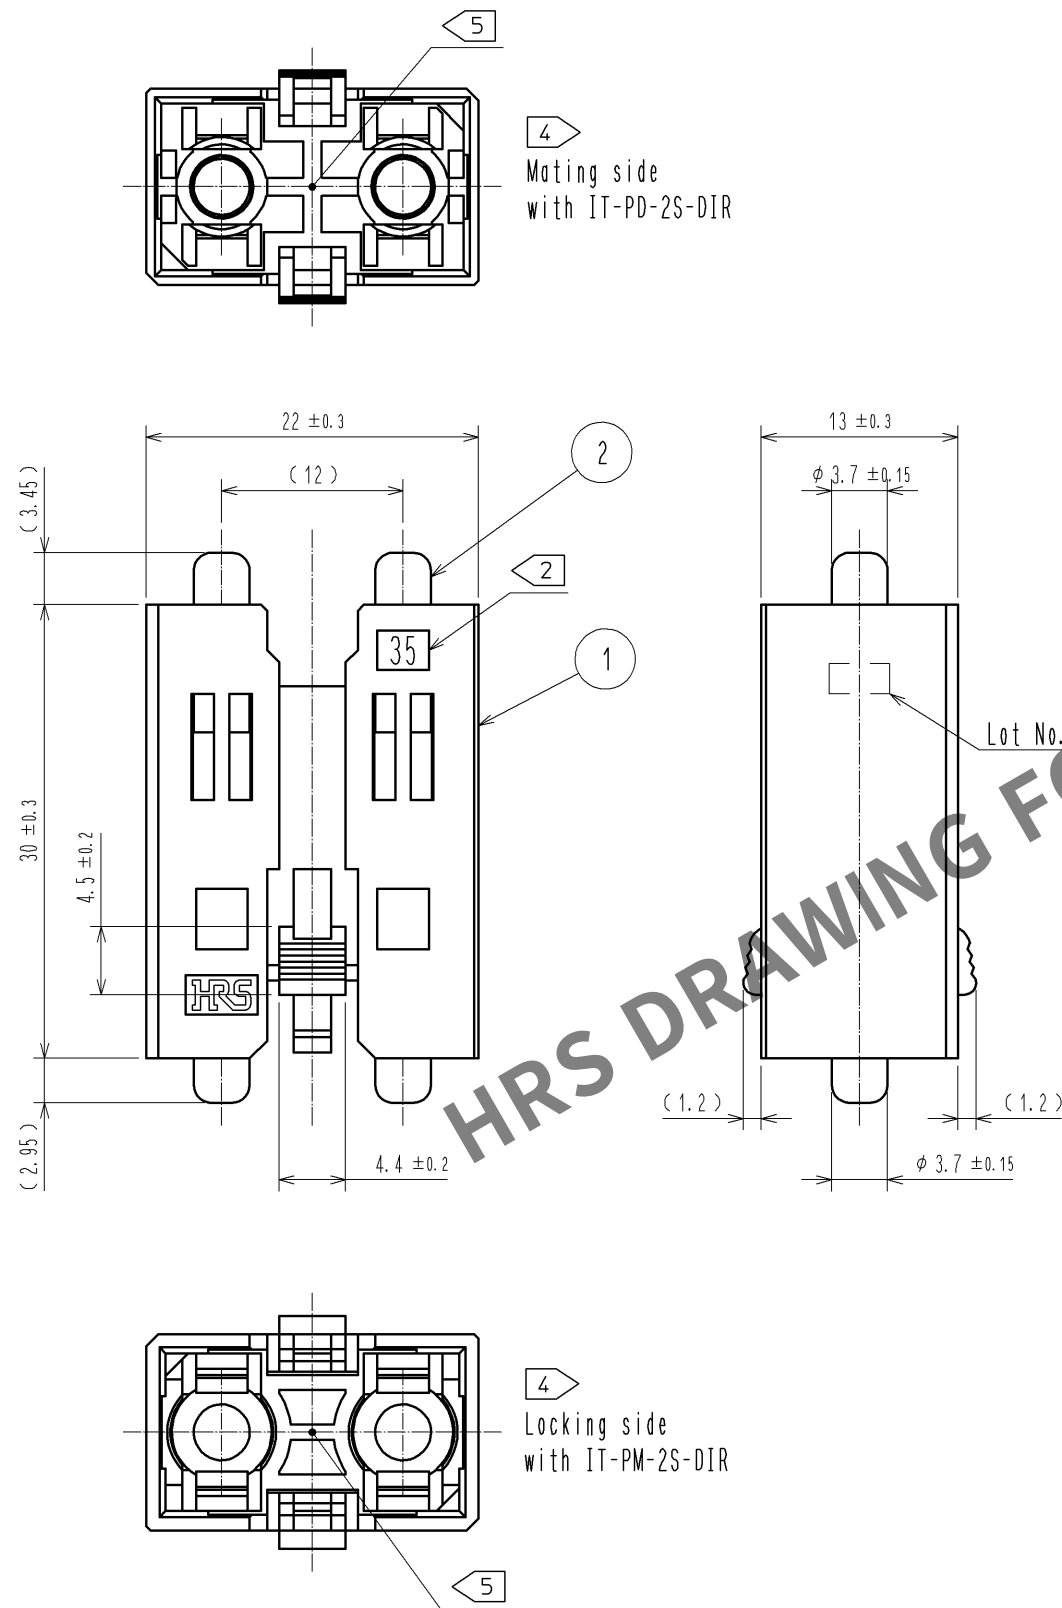


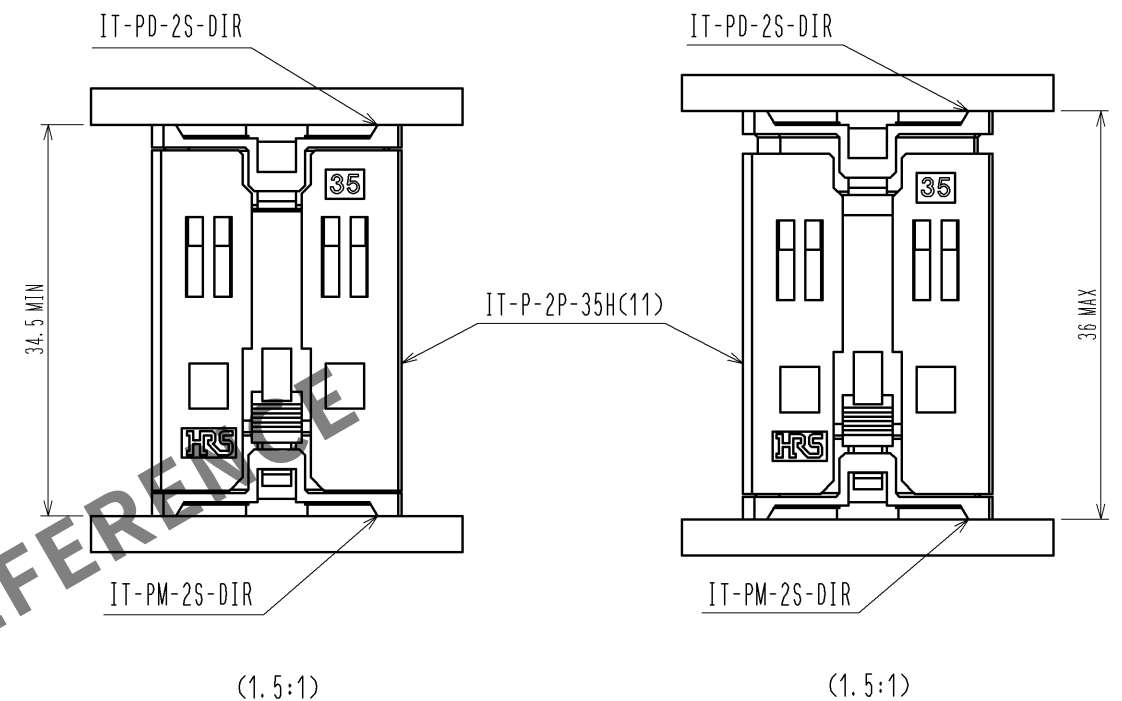

PCB BOARD TO BOARD STACKING HEIGHT RANGE



- Note.
- 1 The lot number is marked in this area.
 - 2 Stack height(Nominal)is shown.
 - 3 The dimensions in parentheses are for reference.
 - 4 Engageable receptacle is defined for each side of this product.
 - 5 Since this product is point symmetry, direction of mating does not have a rule.
 - 6 Manufacturing process could leave scratch and/or punch marks, but they have no effect on the product performance.
 - 7 Since silver plating is used for this product, if it is left in the atmosphere for a long time, plating may become drab.
 - 8 This product is RoHS compliant.
 - 9 This product is packaged in tray. (Max 25pcs/Tray)
 - 10 This part can accommodate the PCB board to board stacking height range of 35 +1/-0.5mm (34.5mm to 36mm).

2	Copper 	Over Plating : Silver 5.1μm		4	Polystyrene	(Tray B)		
		Under Plating : Nickel 1.3μm						
1	PBT	Black UL94V-0		3	Polystyrene	(Tray A)		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-F-006732		DESIGNED TF. SUGAWARA	CHECKED MK. NAGATA	DATE 13. 04. 01
								
 HIROSE ELECTRIC CO., LTD.	APPROVED : MK. EZAKI		12. 11. 14		DRAWING NO. EDC3-339735-01			
	CHECKED : MK. EZAKI		12. 11. 14		PART NO. IT-P-2P-35H(11)			
	DESIGNED : MK. NAGATA		12. 11. 14		CODE NO. CL636-0602-2-11			
	DRAWN : MK. NAGATA		12. 11. 14		 			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

