

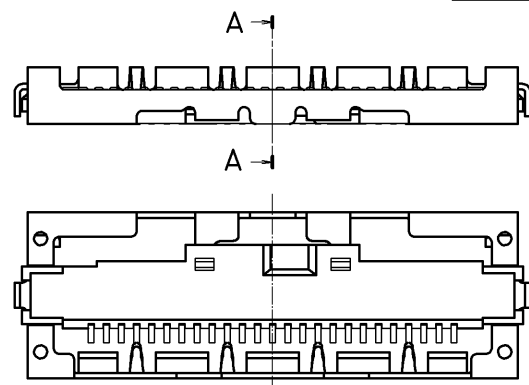


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

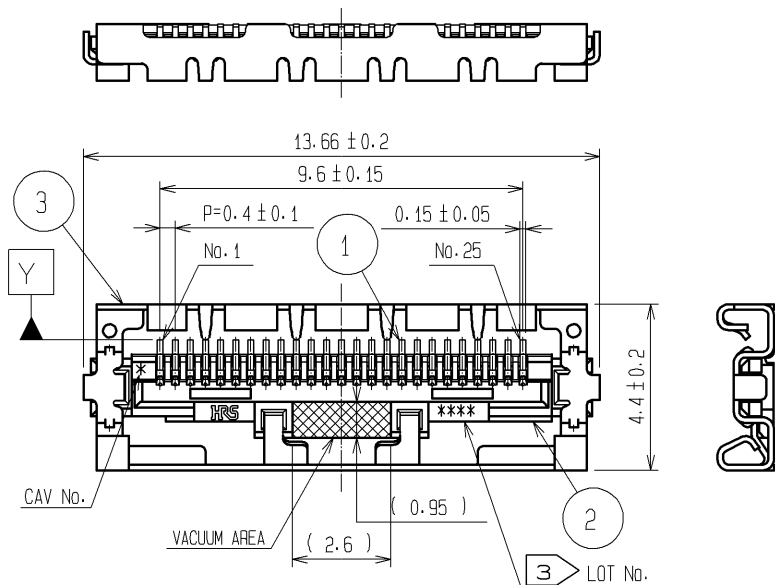

MATING FIGURE

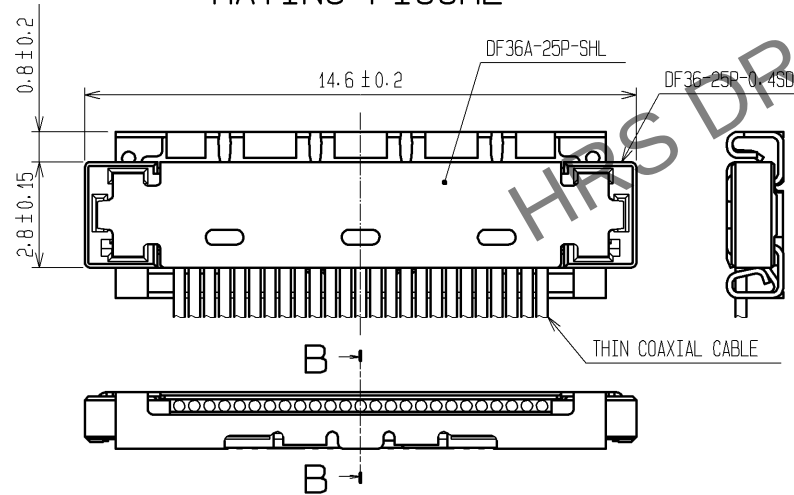


NOTES

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
3. LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: 8GFD
-YEAR: 2008 MONTH: July DAY: 15 LINE No.: 4
4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
5. SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.


3

YEAR		MONTH		DAY				LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE
10	0	Jan	A	1	1	11	B	21	M
11	1	Feb	B	2	2	12	C	22	N
12	2	Mar	C	3	3	13	D	23	P
13	3	Apr	D	4	4	14	E	24	Q
14	4	May	E	5	5	15	F	25	R
15	5	Jun	F	6	6	16	G	26	S
16	6	Jul	G	7	7	17	H	27	T
17	7	Aug	H	8	8	18	J	28	U
08	8	Sep	I	9	9	19	K	29	V
09	9	Oct	J	10	A	20	L	30	W
		Nov	K			31	X		
		Dec	L						

A-A(FREE)

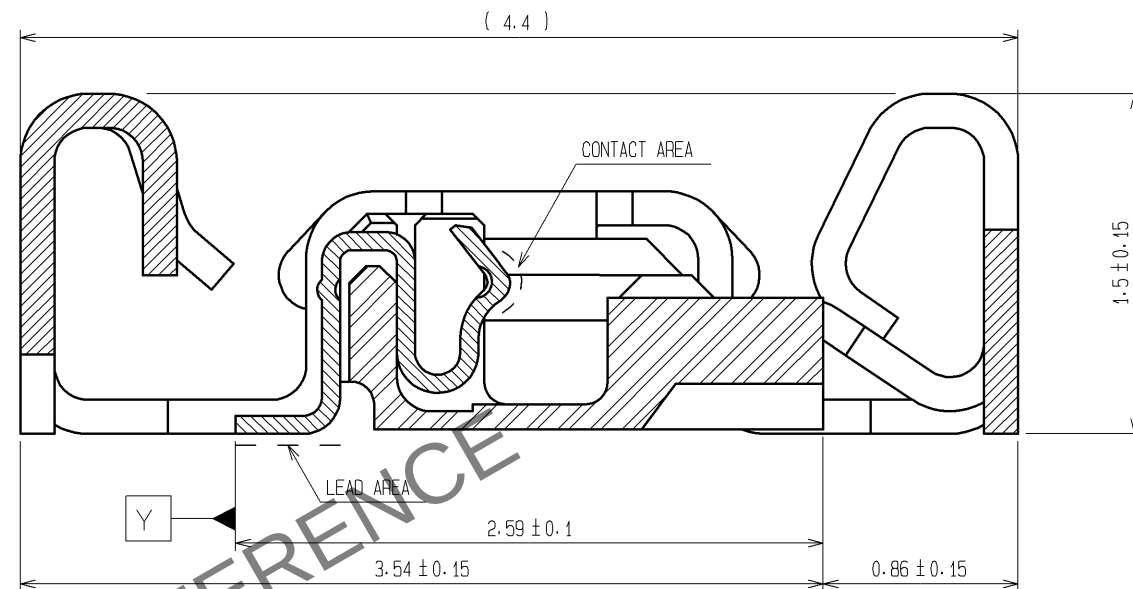

B-B(FREE)

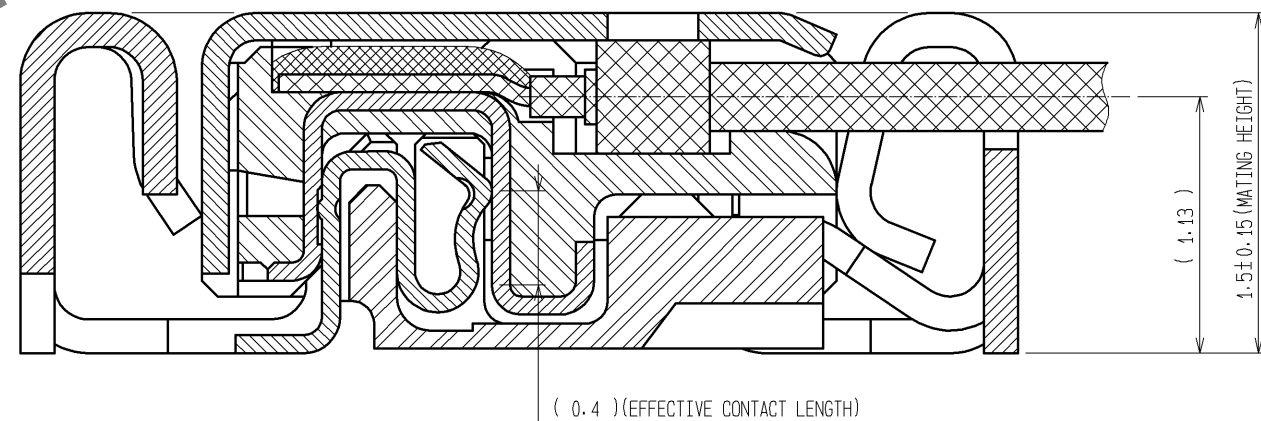

2		LCP	UL94V-0 , BLACK	6	PS	BLACK
1		PHOSPHOR BRONZE	CONTACT AREA : Gold PLATING 0.3µm min LEAD AREA : Gold PLATING 0.1µm min UNDER PLATING : Nickel PLATING 2µm min	5	POLYESTER	CLEAR
NO.		MATERIAL	FINISH , REMARKS	4	PS	CLEAR
NO.		MATERIAL	FINISH , REMARKS	3	PHOSPHOR BRONZE	WHOLE AREA : Tin PLATING 1µm min UNDER PLATING : Copper PLATING 0.2µm min
UNITS		mm	SCALE	DESCRIPTION OF REVISIONS		
5		mm	5 : 1	DESIGNED		
HRS		HIROSE ELECTRIC CO., LTD.	APPROVED : KH. IKEDA	14.11.06	DRAWING NO.	
			CHECKED : MH. TSUCHIDA	14.11.06	PART NO.	
			DESIGNED : IO. DENPOUYA	14.11.06	CODE NO.	
			DRAWN : YJ. HAGA	14.10.23	CL662-4011-4-55	
					EDC3-313271-02	
					DF36A-25S-0.4V(55)	
					1/2	

