



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

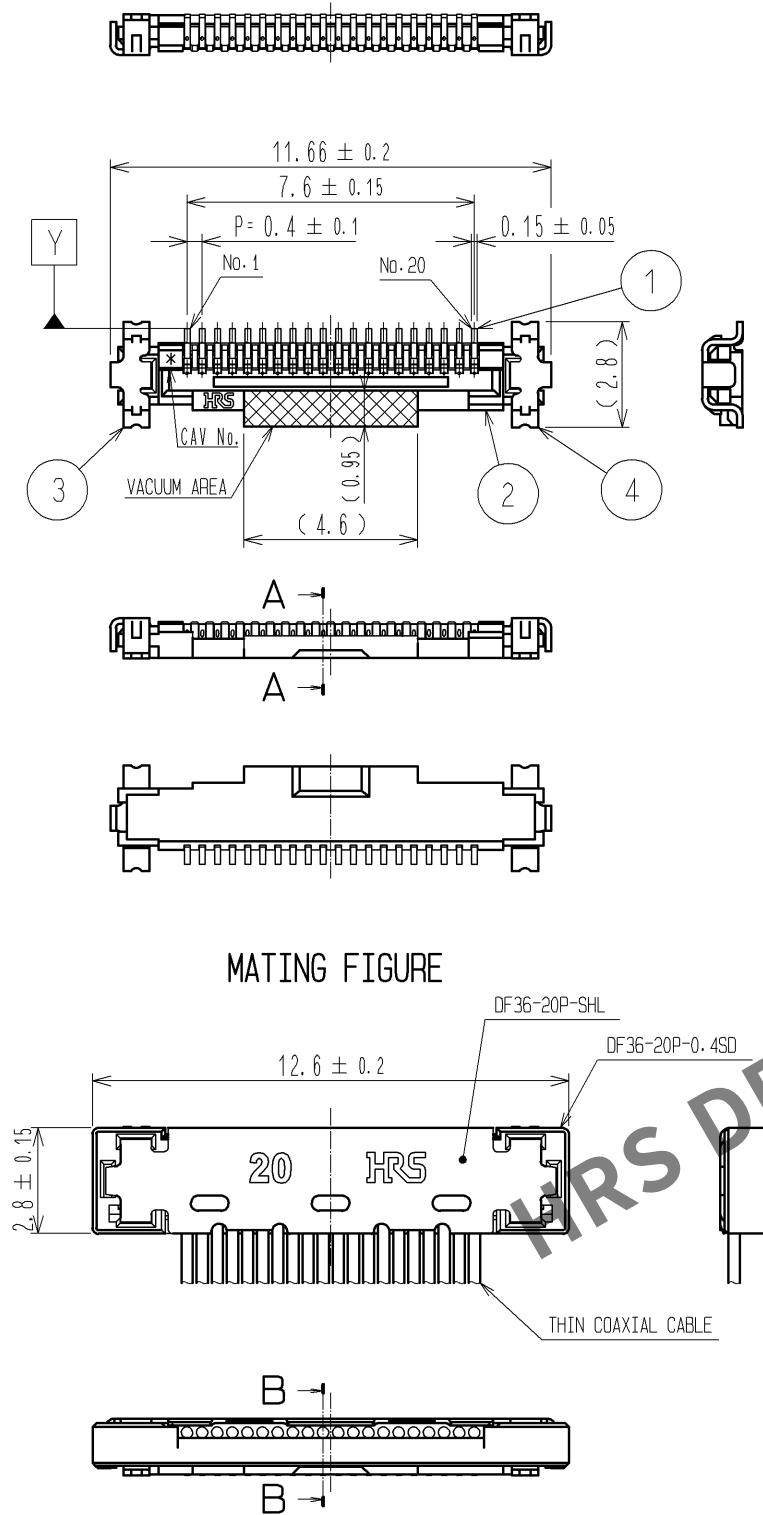

- NOTES
1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
  2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
  3. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.

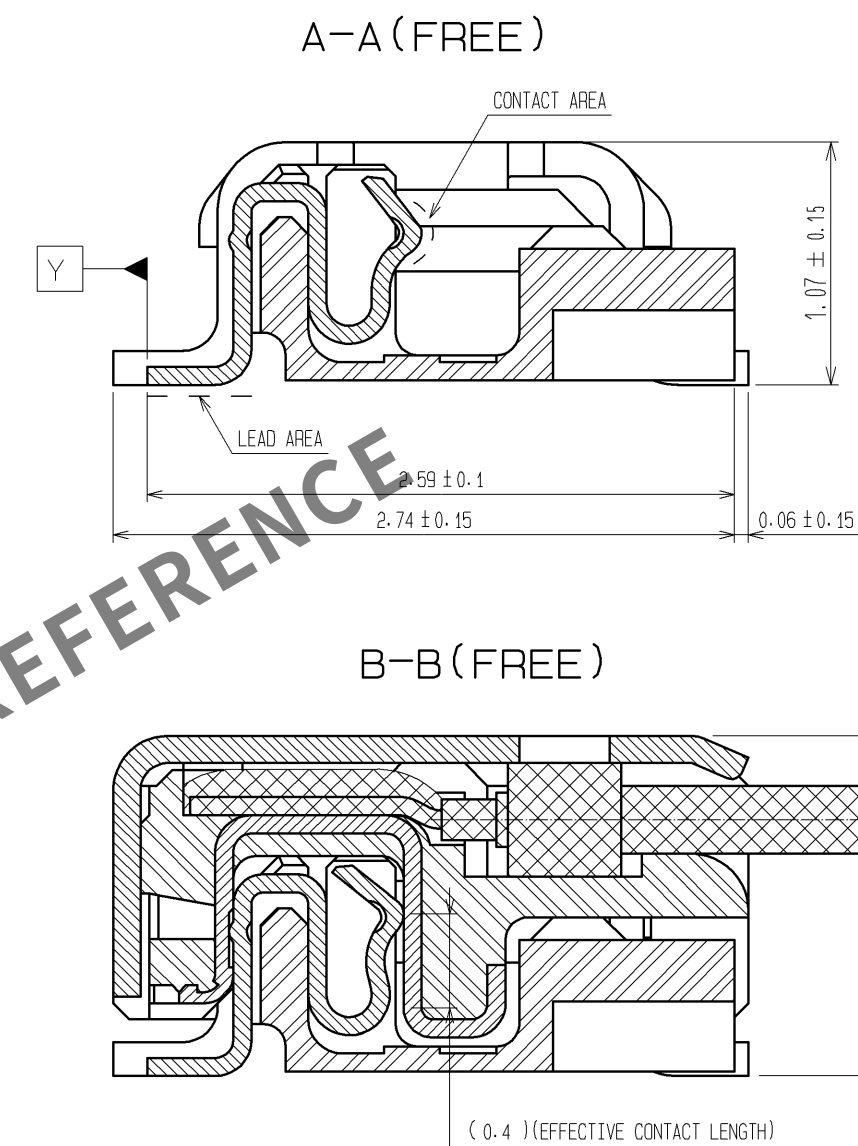

|                           |                 |                                                                                                                       |           |                            |                             |
|---------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------|-----------|----------------------------|-----------------------------|
| 3                         | PHOSPHOR BRONZE | WHOLE AREA : Gold PLATING 0.1μm min<br>UNDER PLATING : Nickel PLATING 2μm min                                         | 7         | PS                         | BLACK                       |
| 2                         | LCP             | UL94V-0 , BLACK                                                                                                       | 6         | POLYESTER                  | CLEAR                       |
| 1                         | PHOSPHOR BRONZE | CONTACT AREA : Gold PLATING 0.3μm min<br>LEAD AREA : Gold PLATING 0.1μm min<br>UNDER PLATING : Nickel PLATING 2μm min | 5         | PS                         | CLEAR                       |
| NO.                       | MATERIAL        | FINISH , REMARKS                                                                                                      | NO.       | MATERIAL                   | FINISH , REMARKS            |
| UNITS<br>mm               |                 | SCALE<br>5 : 1                                                                                                        | COUNT<br> | DESCRIPTION OF REVISIONS   | DESIGNED<br>CHECKED<br>DATE |
|                           |                 | APPROVED : KH. IKEDA                                                                                                  | 14.11.06  | DRAWING NO. EDC3-320369-01 |                             |
| HIROSE ELECTRIC CO., LTD. |                 | CHECKED : MH. TSUCHIDA                                                                                                | 14.11.06  | PART NO. DF36-20S-0.4V(55) |                             |
|                           |                 | DESIGNED : IO. DENPOUYA                                                                                               | 14.11.06  | CODE NO. CL662-4039-3-55   |                             |
|                           |                 | DRAWN : YJ. HAGA                                                                                                      | 14.10.23  |                            |                             |

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

