

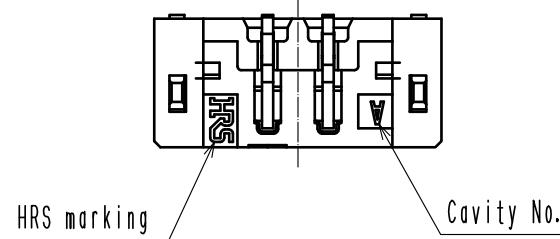
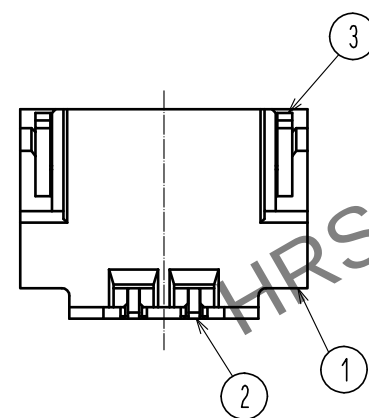
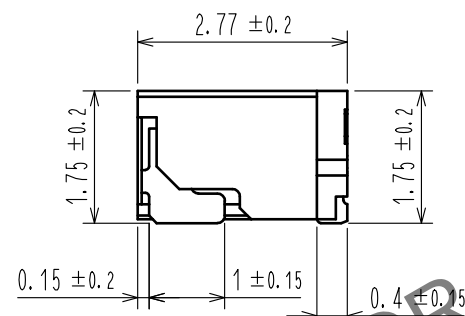
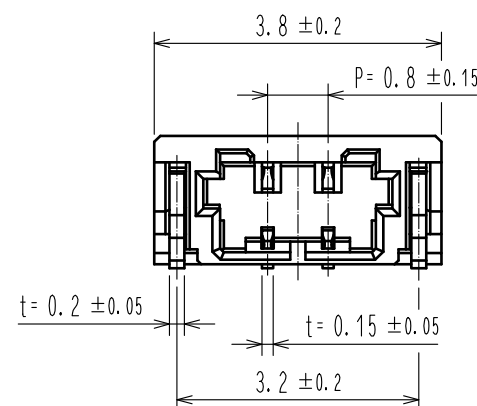


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

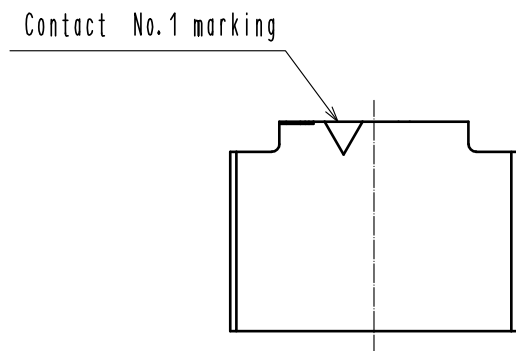



Note 1. Lead co-planarity shall be 0.1mm MAX.
2. Please consult HIROSE when the product is mounted to FPC.

Recommended PCB layout
Recommended metal mask (thickness:0.1mm)

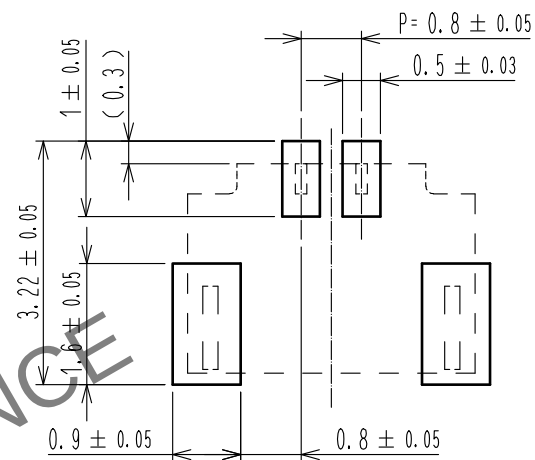

Mating Figure (Free)

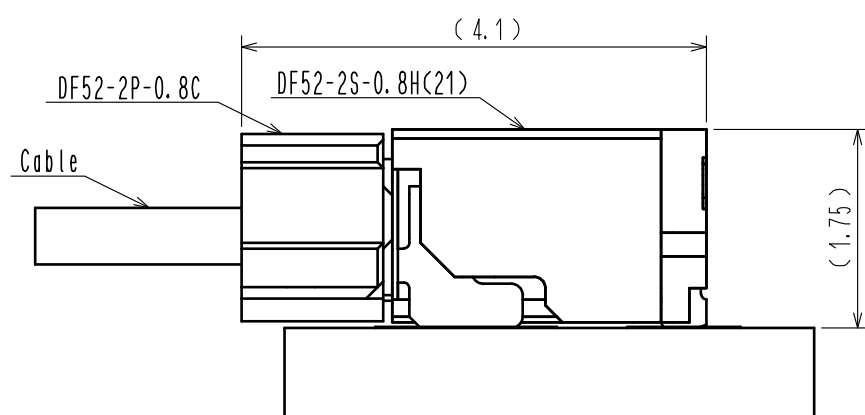

3	Brass	Surface:tin plating 1μm MIN	6	PS	Black(Reel)			
2	Copper alloy	Surface:tin plating 1μm MIN	5	Polyester	Clear(Cover tape)			
1	Polyamide	Black, UL94V-0	4	PS	Clear(Embossed carrier tape)			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 10: 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	:HS. OKAWA		17. 07. 06	DRAWING NO. EDC-356470-21-01		
		CHECKED	:TS. FUKUSHIMA		17. 07. 06	PART NO. DF52-2S-0. 8H(21)		
		DESIGNED	:MI. SAKIMURA		17. 07. 06	CODE NO. CL668-0004-5-21		
		DRAWN	:MI. SAKIMURA		17. 07. 06	 1/2		

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

