



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

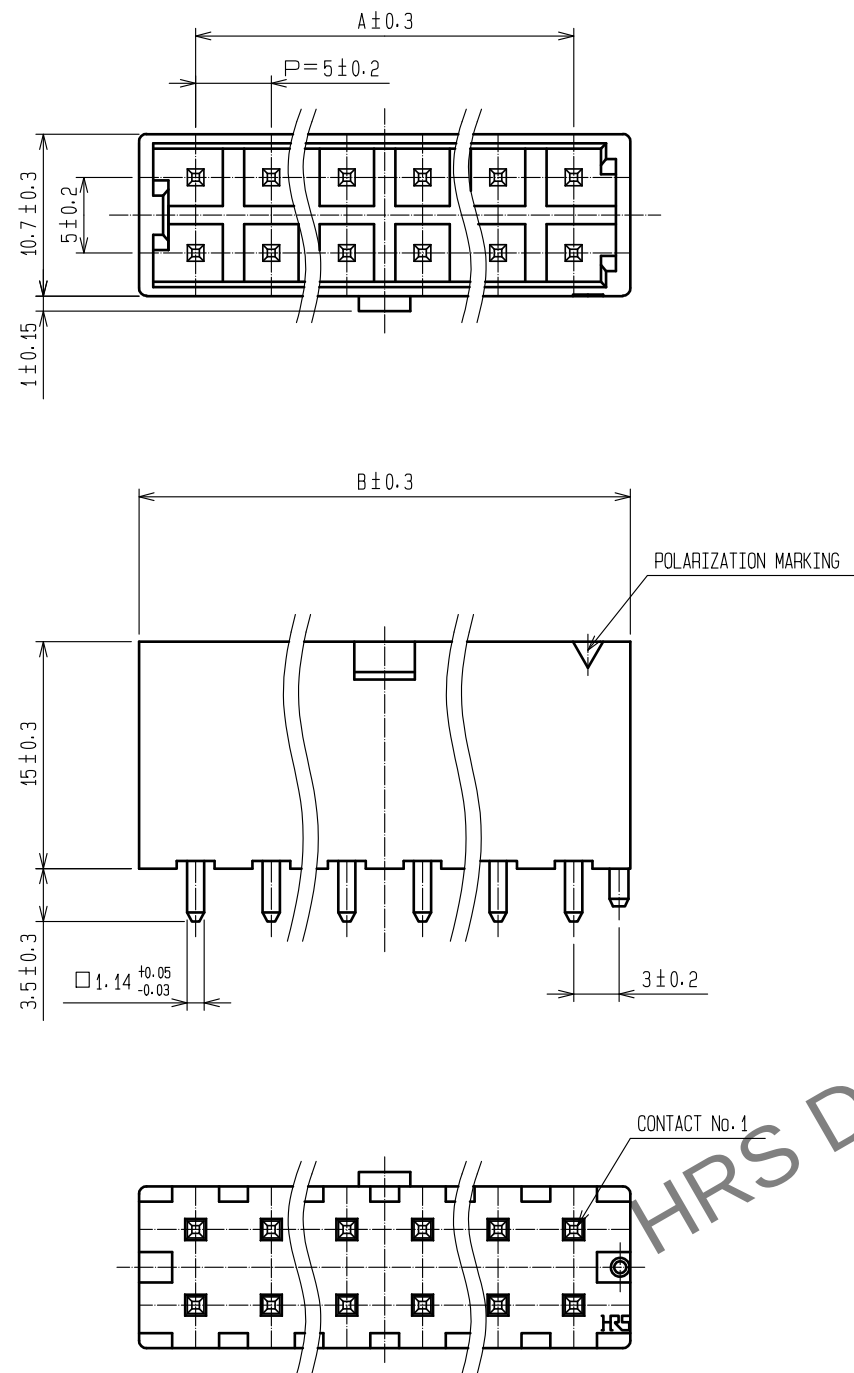



PART No.	CODE No.	A	B
DF5A-4DP-5DSA (35)	CL676-0029-0-35	-	12.5
DF5A-6DP-5DSA (35)	CL676-0030-0-35	10.0	17.5
DF5A-8DP-5DSA (35)	CL676-0031-2-35	15.0	22.5
DF5A-10DP-5DSA (35)	CL676-0032-5-35	20.0	27.5
DF5A-12DP-5DSA (35)	CL676-0033-8-35	25.0	32.5
DF5A-14DP-5DSA (35)	CL676-0034-0-35	30.0	37.5
DF5A-16DP-5DSA (35)	CL676-0035-3-35	35.0	42.5

APPLICATION DIAGRAM

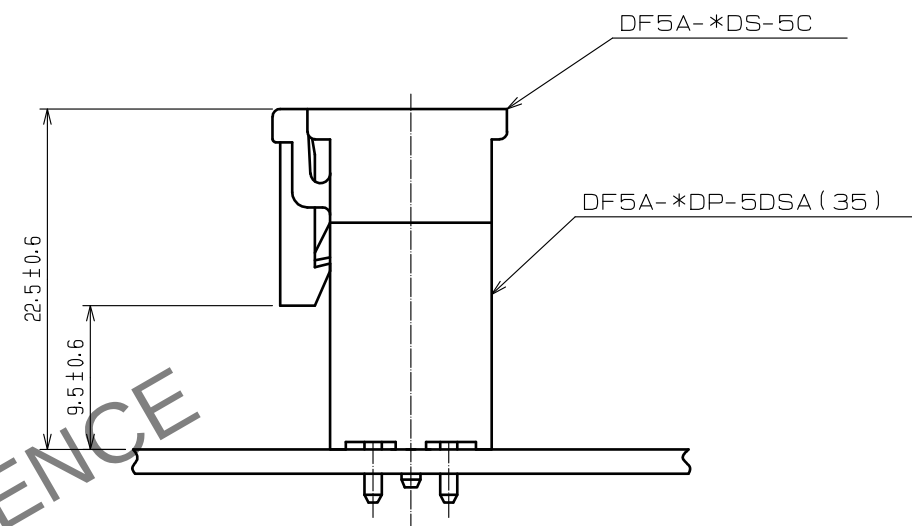

RECOMMENDED PCB LAYOUT (t=1.6±0.1)

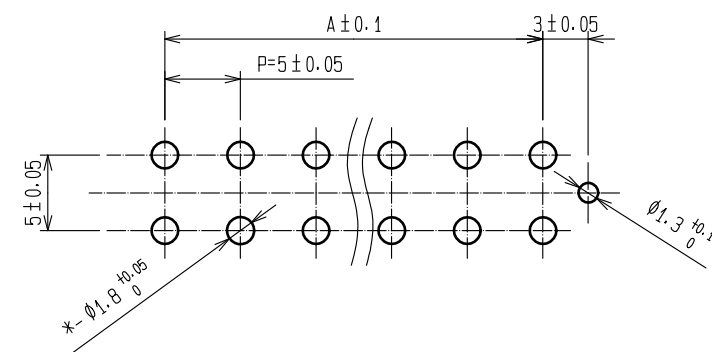

			2		BRASS		SURFACE:TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 0.5μm min						
1	POLYAMIDE		NATURAL (BEIGE)・UL94V-0										
NO.		MATERIAL		FINISH , REMARKS		NO.		MATERIAL		FINISH , REMARKS			
UNITS mm				SCALE 2 : 1				COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED : KI. AKIYAMA		15.08.08		DRAWING NO.		EDC-302829-35-01			
				CHECKED : TS. FUKUSHIMA		15.08.08		PART NO.		DF5A- *DP-5DSA(35)			
				DESIGNED : TS. KUMAZAWA		15.08.08		CODE NO.		CL676			
				DRAWN : TS. KUMAZAWA		15.08.08							
 1/													