


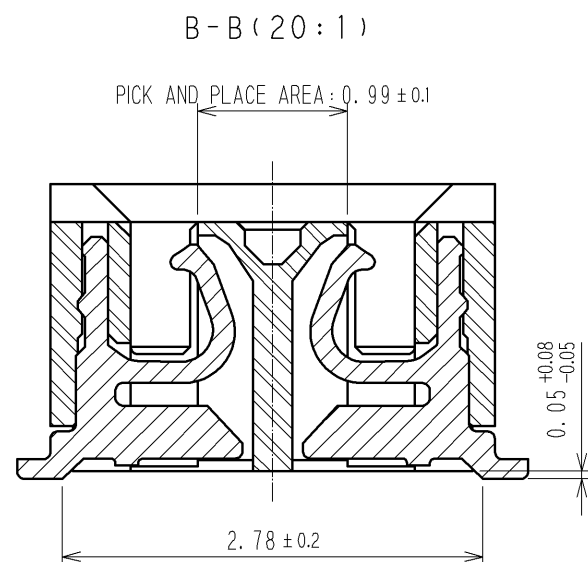
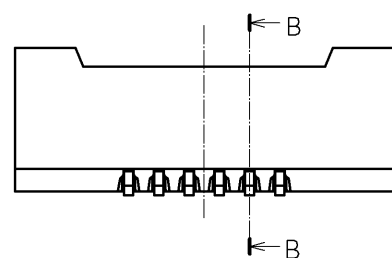


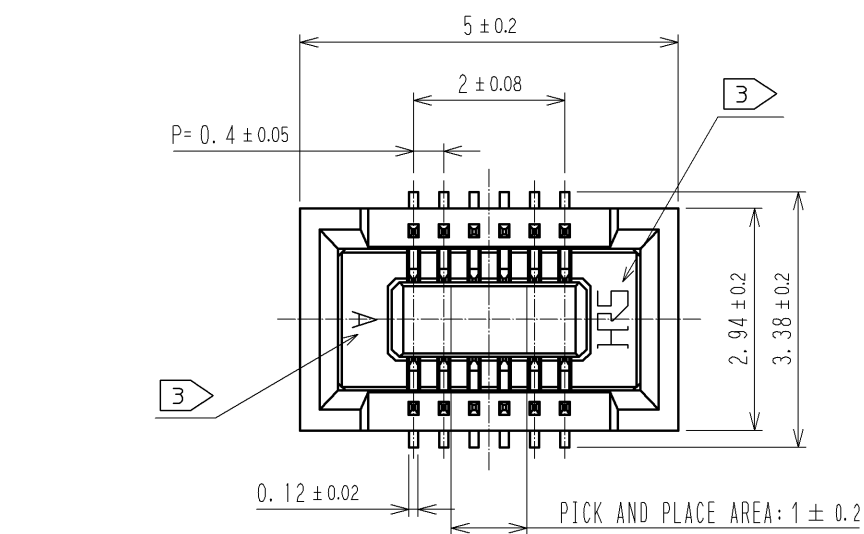

ENGAGEMENT FIGURE (20:1)

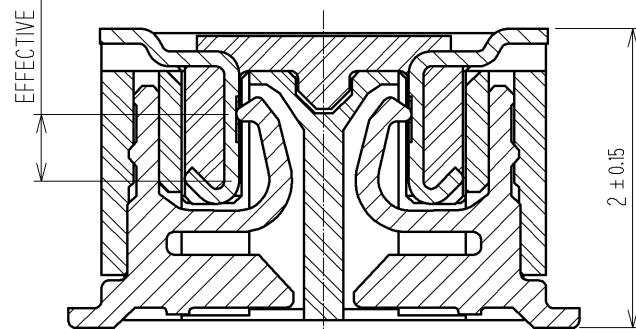

RECOMMENDED PATTERN

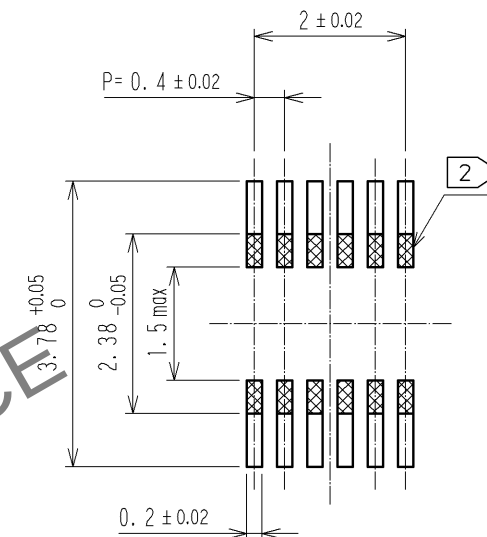




RECOMMENDED METAL MASK THICKNESS : 120 μ m
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD

- NOTES) 1. ALL LEADS CO-PLANARITY SHALL BE 0.1MAX.
2. IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3. HRS MARK AND CAV NO. IS INDICATED IN APPROX POSITION SHOWN.


2	PHOSPHOR BRONZE	GOLD 0.05 μ m MIN	6	PS	CLEAR(REINFORCEMENT COLLAR)
		UNDERPLATING:NICKEL 1 μ m MIN	5	PS	BLACK
1	LCP	UL94V-0-BLACK	4	POLYESTER	CLEAR(COVER TAPE)
NO. MATERIAL		FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 10: 1	COUNT		DESCRIPTION OF REVISIONS
HRS		APPROVED : KH. IKEDA	13. 03. 21	DRAWING NO. EDC3-330342-51	
HIROSE ELECTRIC CO., LTD.		CHECED : TS. MIYAZAKI	13. 03. 21	PART NO. DF40C (2. 0) -12DS-0. 4V (51)	
		DESIGNED : TY. YAMASAKI	13. 03. 21	CODE NO. CL684-4148-6-51	
		DRAWN : NT. SEKI	13. 03. 19		

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


EMBOSSED CARRIER TAPE DIMENSIONS (5:1)

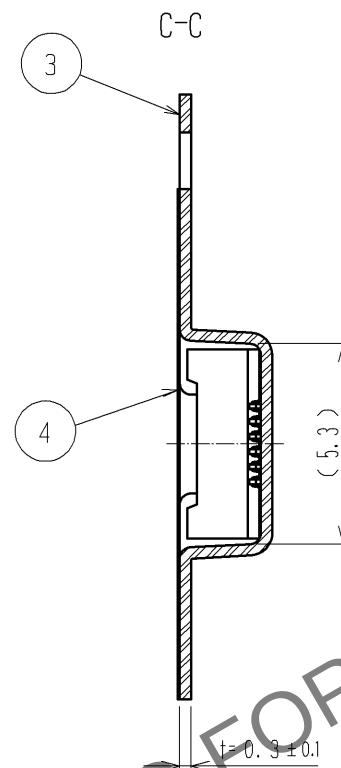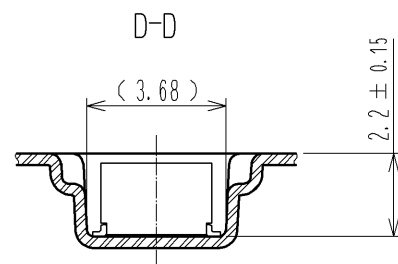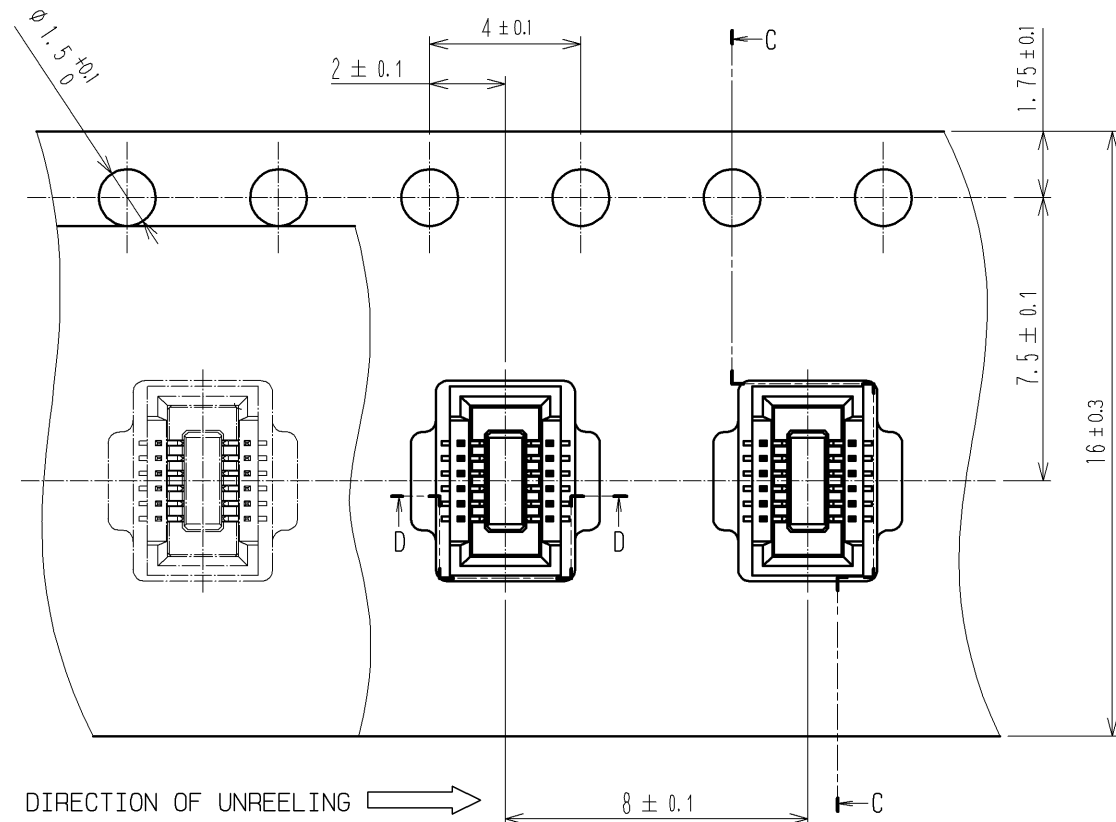

STYLE AND DIMENSION OF REEL (FREE)

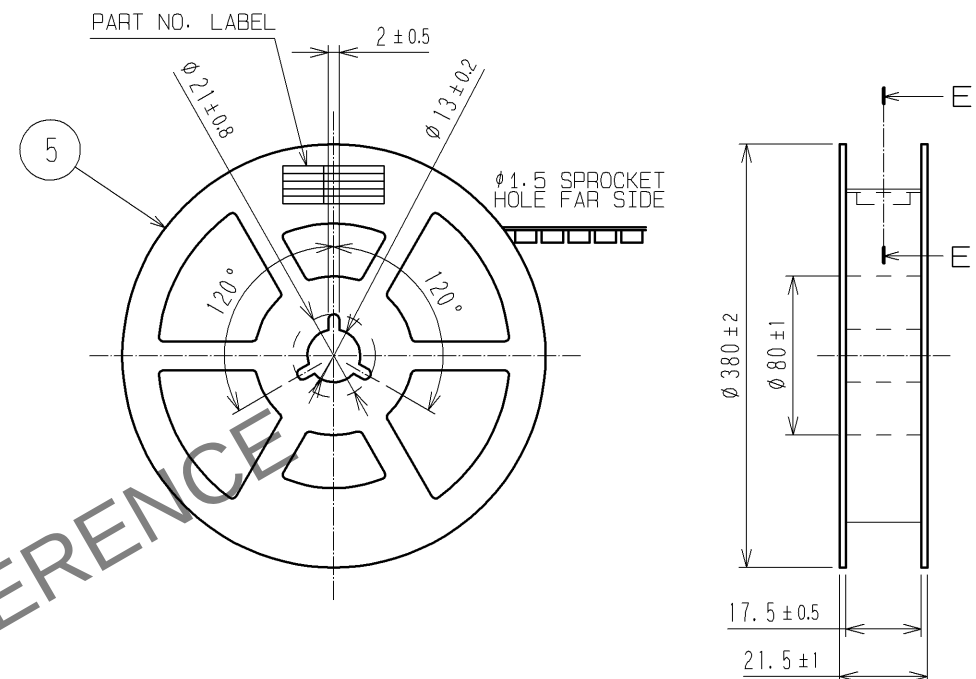

E-E (FREE)

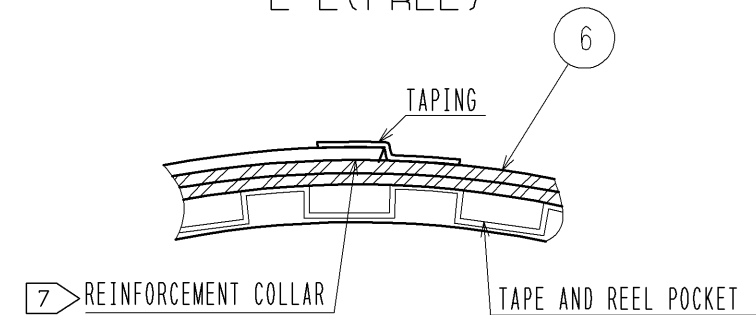


DETAIL OF PART NO. LABEL

SUPPLIER
QUANTITY
PART NO.
CODE NO.
DATE OF MANUFACTURED

製造年月日	** ** *
製品コード	CL684-4148-6-51
製品名	DF40C(2.0)-12DS-0.4V(51)
数量	4000
納入者	ヒロセ電機(株)

- NOTES) 4. PER REEL 4000 CONNECTORS.
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
6. REFER TO JIS C 0806
(IEC 60286-3. PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
7. AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET, AND TAPE DOWN AT THE END THE COLLAR.

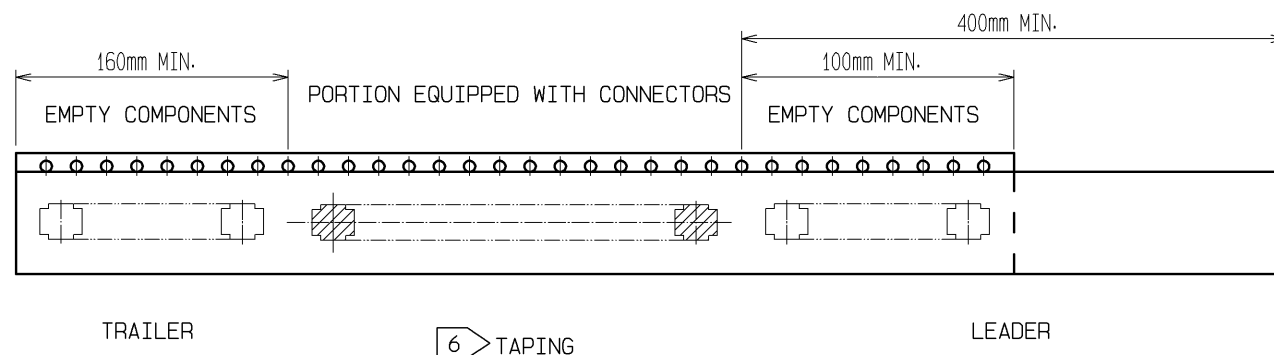

HRS

DRAWING NO.	EDC3-330342-51
PART NO.	DF40C(2.0)-12DS-0.4V(51)
CODE NO.	CL684-4148-6-51