

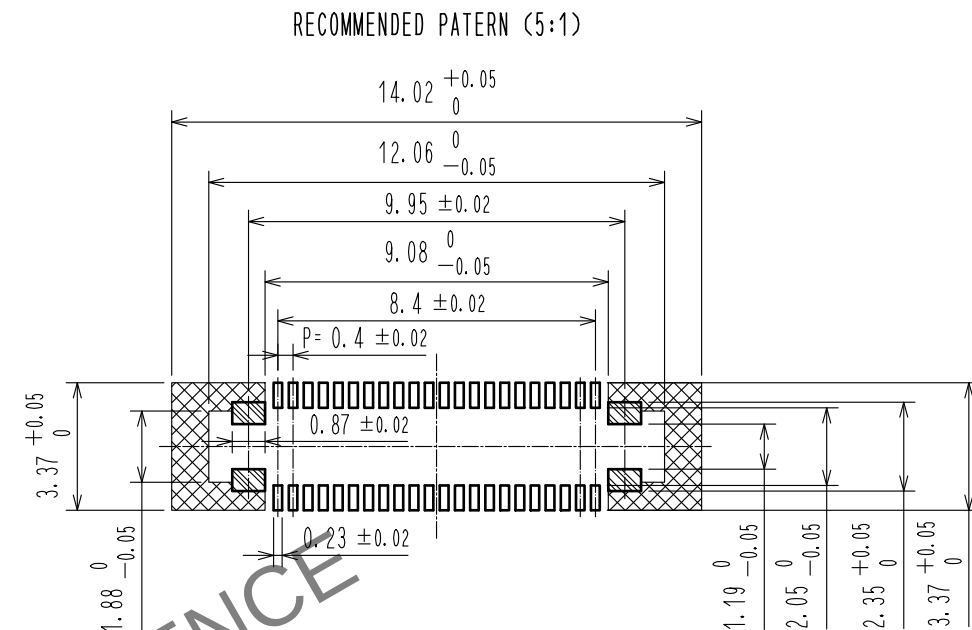


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

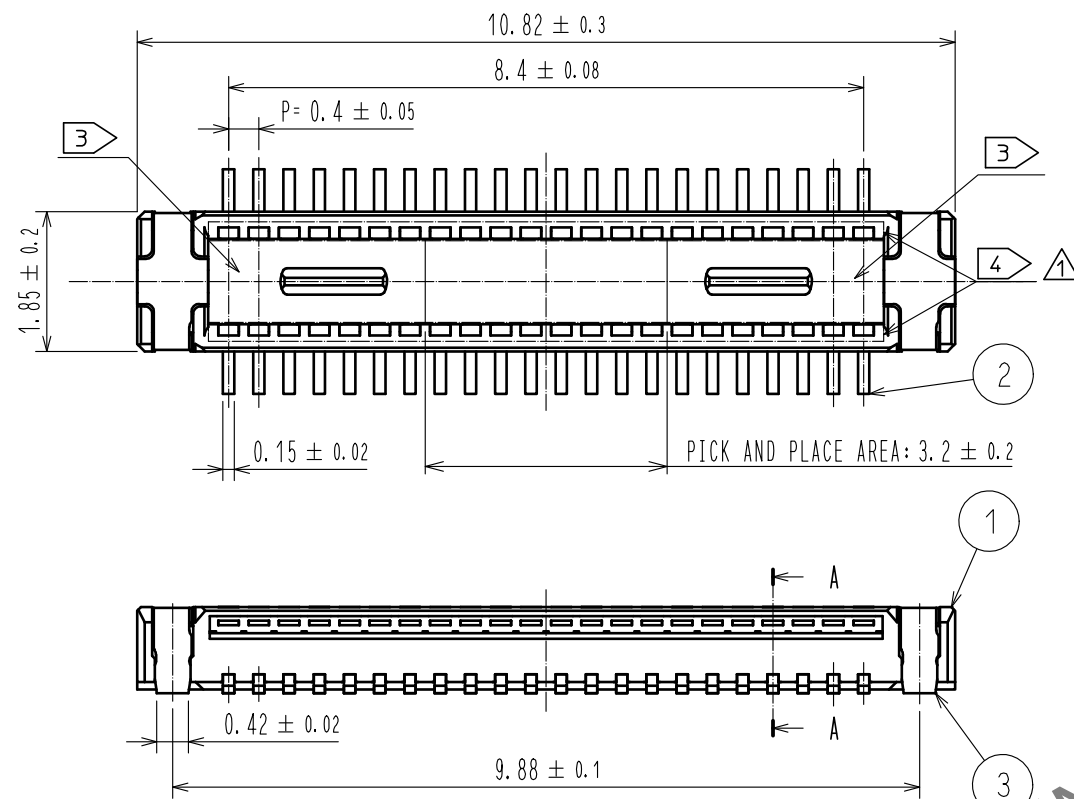

□ : SIGNAL ▨ : GROUND ▩ : NON-CONDUCTIVE AREA
RECOMMENDED METAL MASK THICKNESS : $120 \mu\text{m}$
RECOMMENDED MASK OPENING RATIO : 80% FOR LEAD PAD

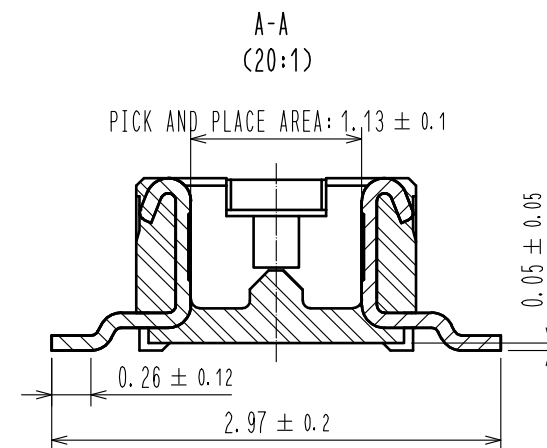

- NOTES
- ALL LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - PLATING SPECIFICATIONS
CONTACT AREA : GOLD $0.05 \mu\text{m}$ MIN
SMT LEAD : GOLD $0.05 \mu\text{m}$ MIN
UNDER PLATING : NICKEL $1 \mu\text{m}$ MIN
(SURFACE : SEALING)
 - HRS MARK AND CAV No. ARE INDICATED IN APPROX POSITION SHOWN.
 - THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA.
BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

3	STAINLESS STEEL	2	7	PS	CLEAR(REINFORCEMENT COLLAR)
2	PHOSPHOR BRONZE	2	6	PS	BLACK(PLASTIC REEL)
1	LCP	BLACK , UL94 V-0	5	POLYESTER	CLEAR(COVER TAPE)
			4	PS	CLEAR(EMBOSSED CARRIER TAPE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 10 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-H-00006346	DESIGNED PAN YIWEI
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. ISHIDA	20150728	DRAWING NO.	EDC-355294-58-01
		CHECKED : WR. FUKUCHI	20150728	PART NO.	DF40GL-44DP-0.4V(58)
		DESIGNED : SJ. WADA	20150727	CODE NO.	CL684-4412-2-58
		DRAWN : KR. AJITO	20150727		
					DATE 20200928

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

