

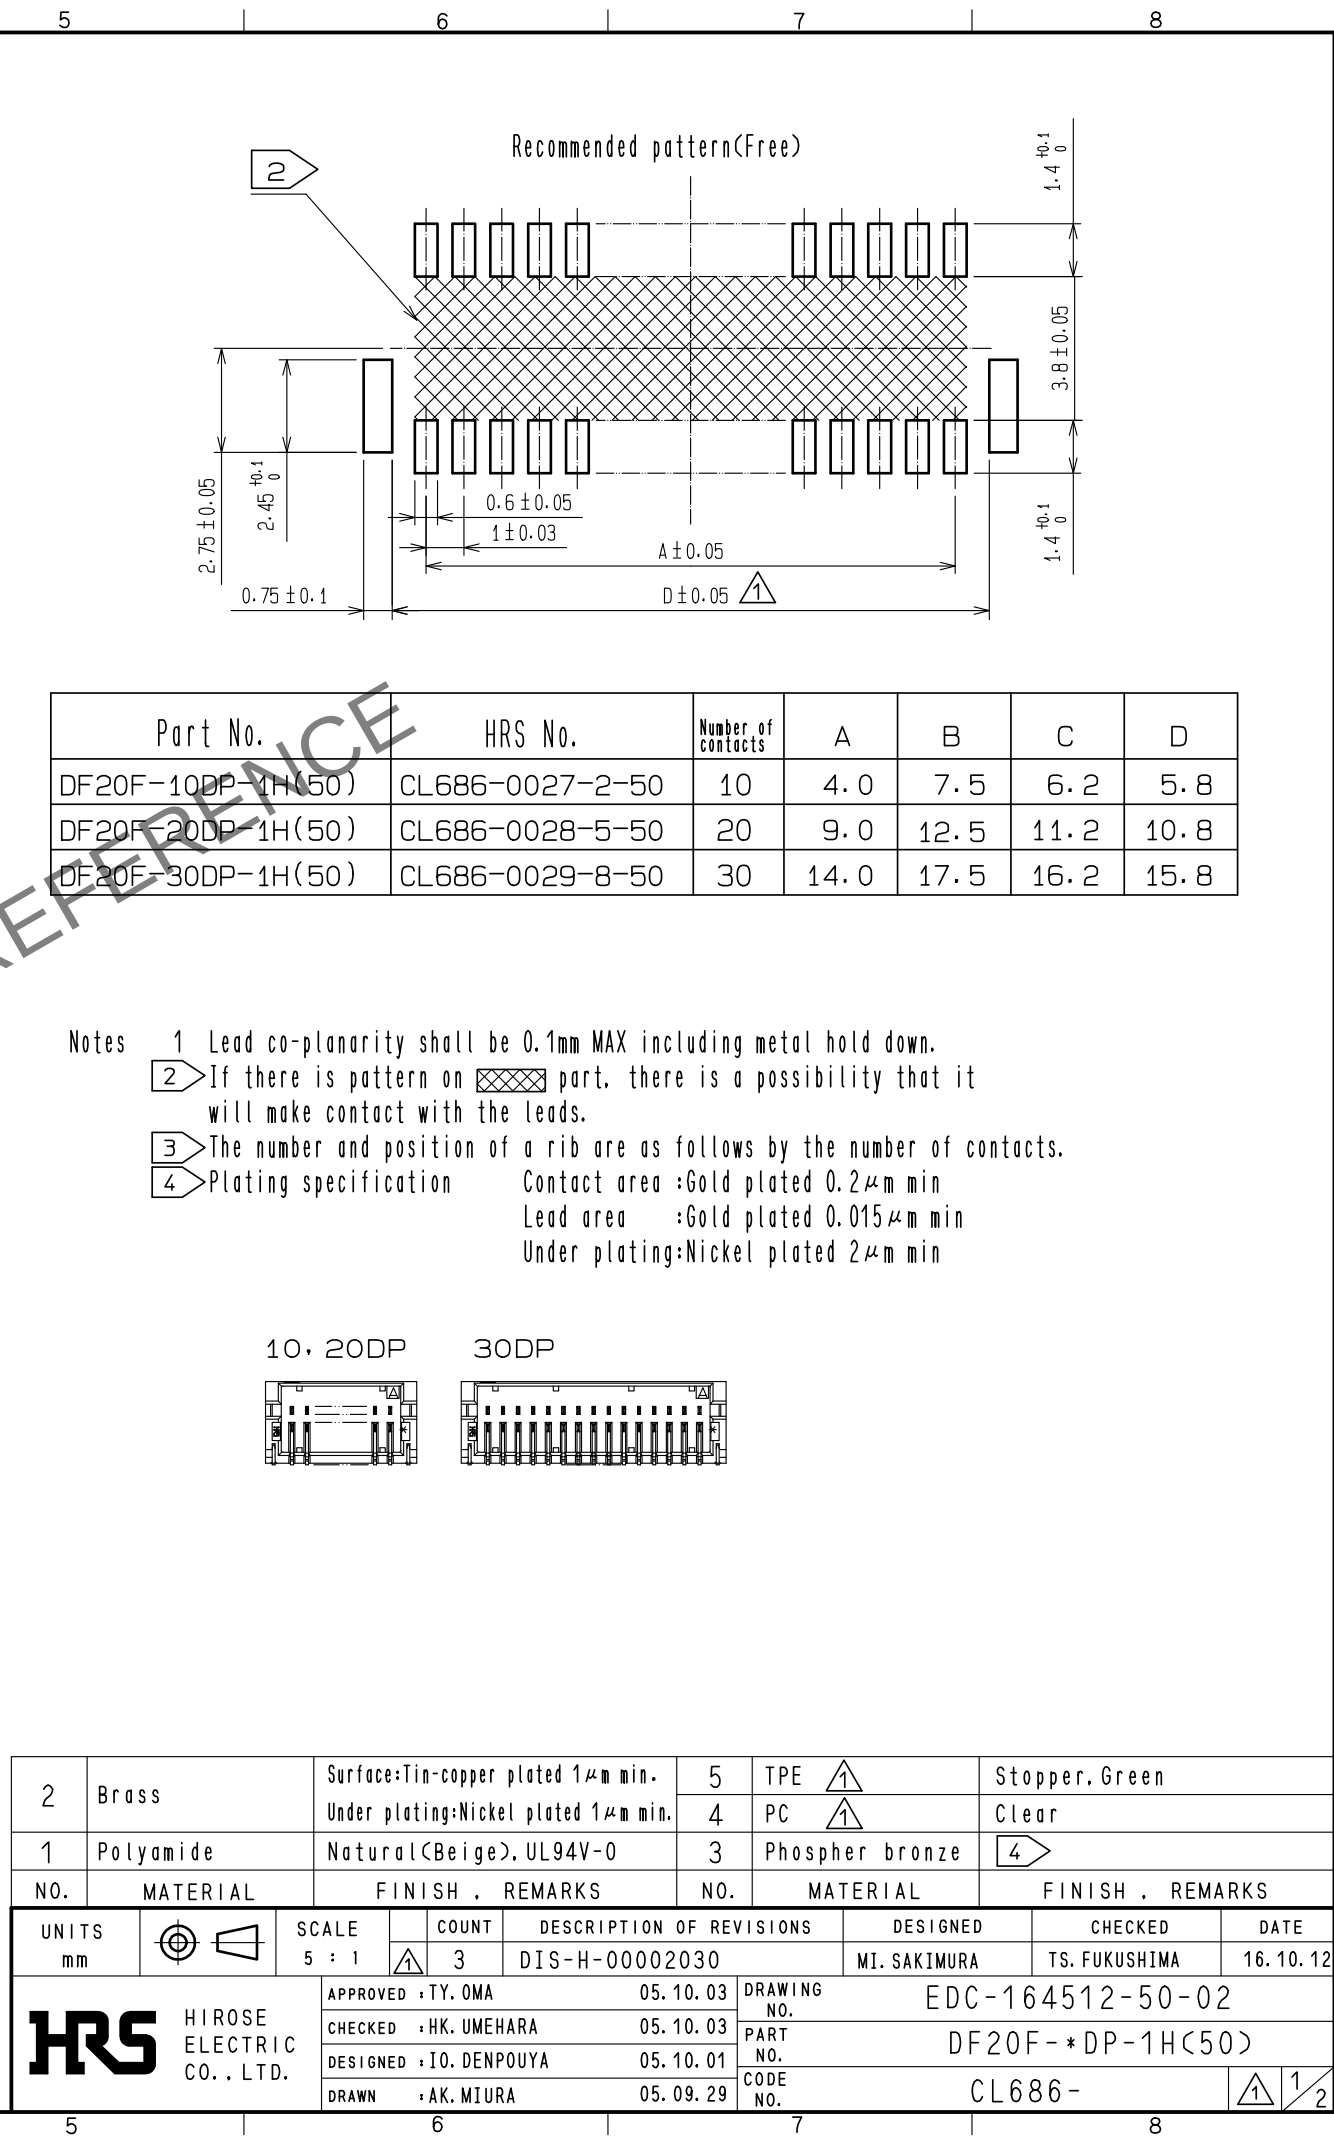


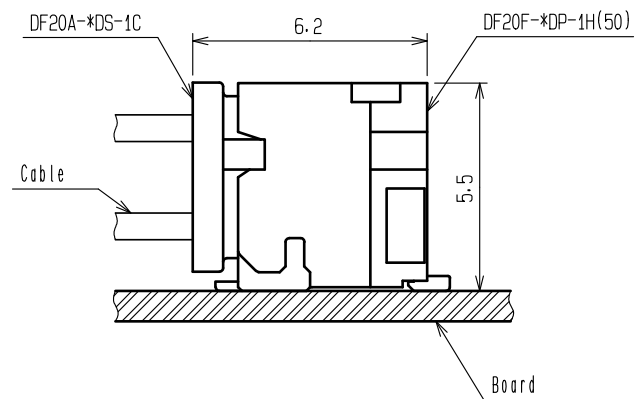

Notes

- 1 Lead co-planarity shall be 0.1mm MAX including metal hold down.
- 2 If there is pattern on  part, there is a possibility that it will make contact with the leads.
- 3 The number and position of a rib are as follows by the number of contacts.
- 4 Plating specification
Contact area :Gold plated 0.2μm min
Lead area :Gold plated 0.015μm min
Under plating:Nickel plated 2μm min



2	Brass	Surface: Tin-copper plated 1μm min. Under plating: Nickel plated 1μm min.	5	TPE 	Stopper. Green
			4	PC 	Clear
1	Polyamide	Natural (Beige), UL94V-0	3	Phosphor bronze	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1	 COUNT 3	DESCRIPTION OF REVISIONS DIS-H-00002030	DESIGNED MI. SAKIMURA	CHECKED TS. FUKUSHIMA	DATE 16.10.12
-------------	---	----------------	--	--	--------------------------	--------------------------	------------------

 HIROSE ELECTRIC CO., LTD.	APPROVED : TY. OMA	05.10.03	DRAWING NO.	EDC-164512-50-02	
	CHECKED : HK. UMEHARA	05.10.03	PART NO.	DF20F-*DP-1H(50)	
	DESIGNED : IO. DENPOUYA	05.10.01	CODE NO.	CL686-	
	DRAWN : AK. MIURA	05.09.29		 	

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

