
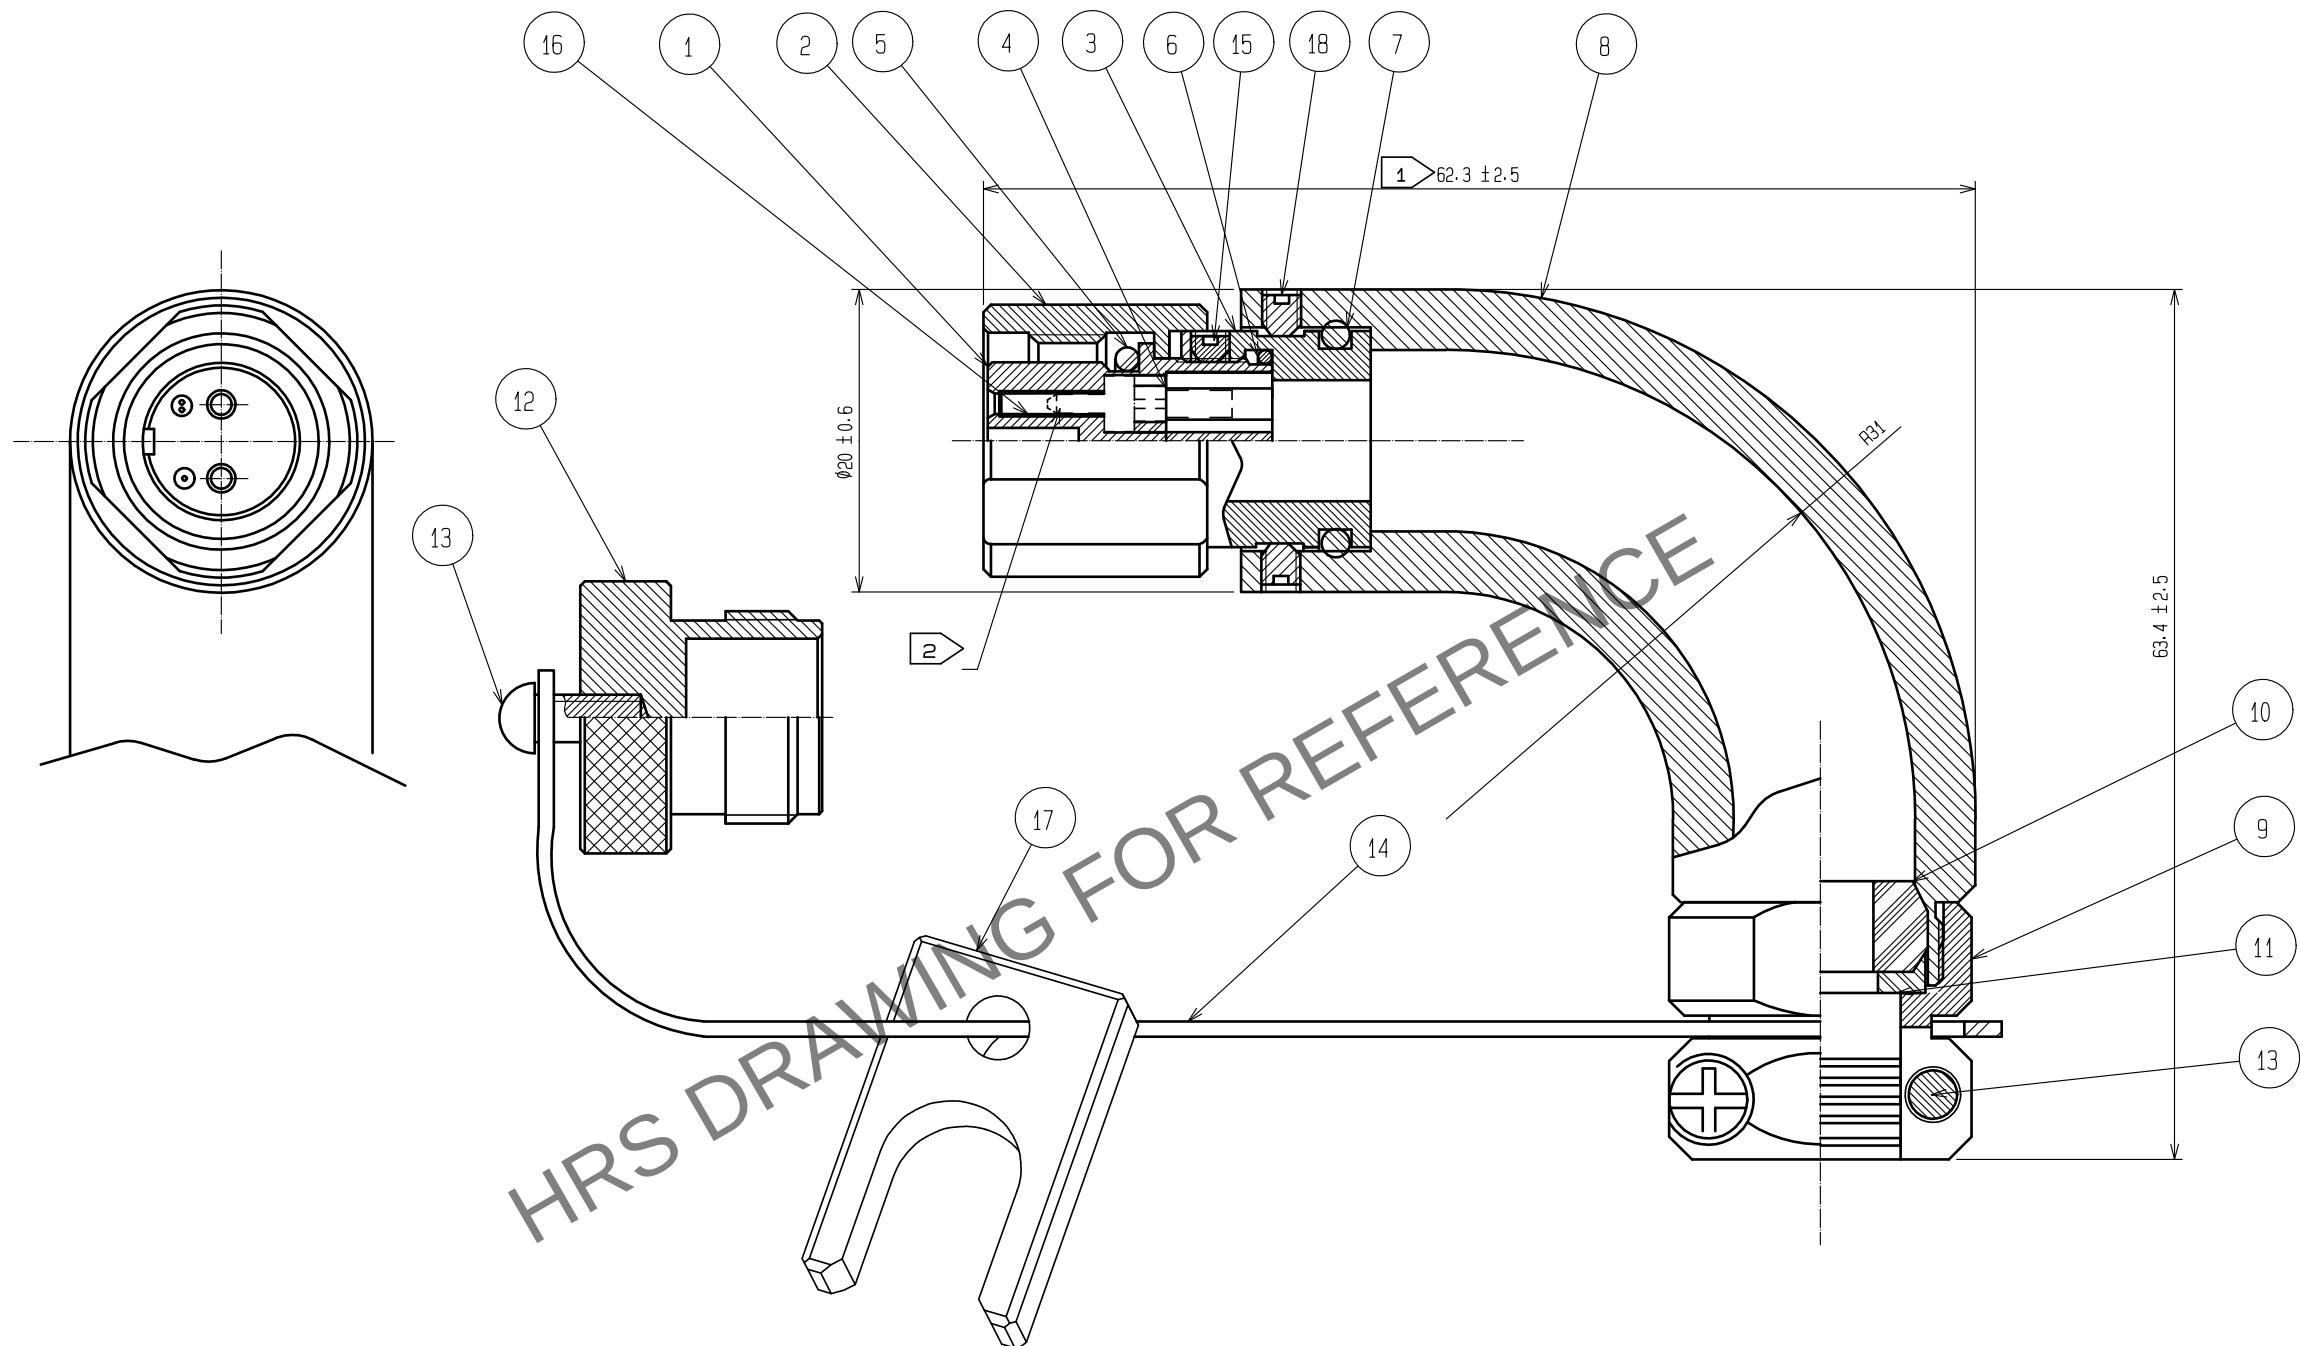


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Note 1 This dimension shows after assembling.
2 This part is not contained. Please use an optional simplified plug(no boot).
3. the clamp torque of ref no.2 to be 1.5~3n·m.

9	Brass	Chrome plating	18	Stainless steel	_____		
8	Aluminum alloy	Anodic oxide coating	17	Synthetic resin	_____		
7	Synthetic rubber	_____	16	Zirconia	_____		
6	Synthetic rubber	_____	15	Stainless steel	_____		
5	Synthetic rubber	_____	14	Nylon	_____		
4	Synthetic resin	_____	13	Stainless steel	Nyrock		
3	Aluminum alloy	Anodic oxide coating	12	Aluminum alloy	Anodic oxide coating		
2	Brass	Chrome plating	11	Synthetic resin	_____		
1	Zinc diecast	Chrome plating	10	Synthetic rubber	_____		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE		
				APPROVED :MT. SHIBUTANI 18.03.27				DRAWING NO. EDC-176104-31-00		
				CHECKED :MT. SHIBUTANI 18.03.27				PART NO. MF10S-WLP6C02-0200(31)		
				DESIGNED :SI. MATSUMOTO 18.03.27				CODE NO. CL709-0516-8-31		
DRAWN :SR. TOYOKAWA 18.03.27									1	



HIROSE
ELECTRIC
CO., LTD.