


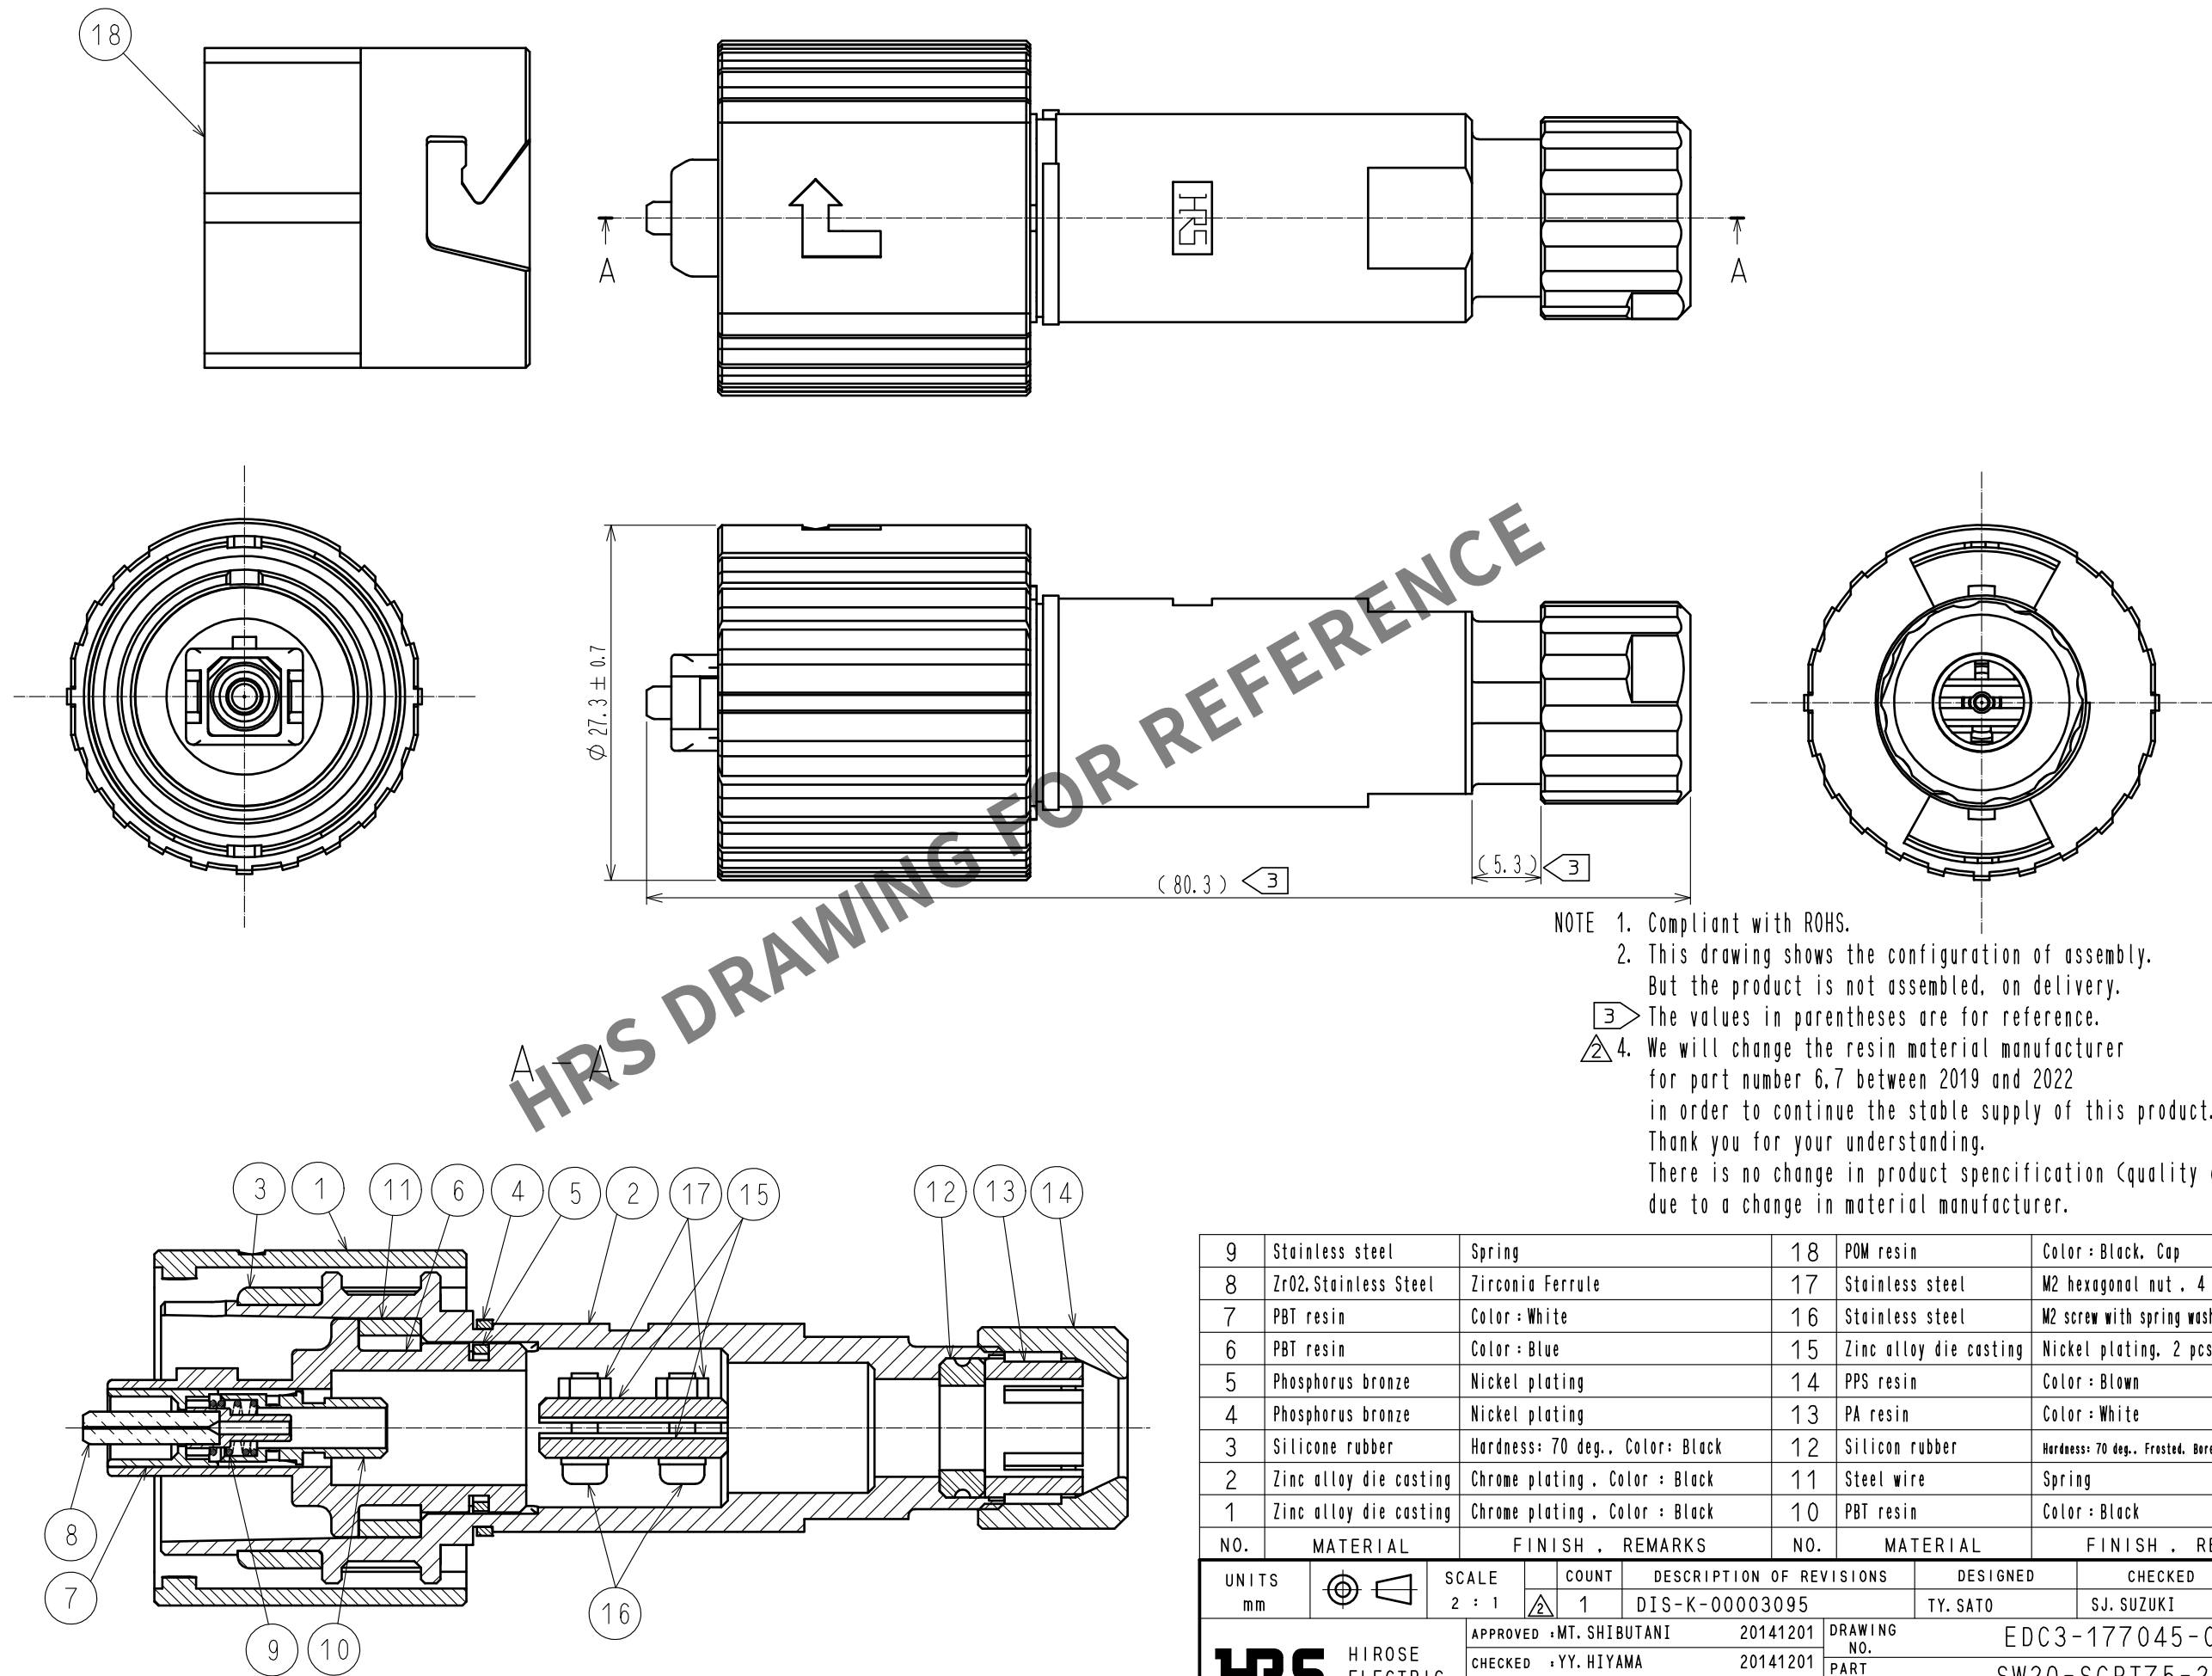

- NOTE 1. Compliant with ROHS.
2. This drawing shows the configuration of assembly.
But the product is not assembled, on delivery.
3 The values in parentheses are for reference.
4. We will change the resin material manufacturer
for part number 6.7 between 2019 and 2022
in order to continue the stable supply of this product.
Thank you for your understanding.
There is no change in product spencification (quality difference)
due to a change in material manufacturer.

9	Stainless steel	Spring	18	POM resin	Color : Black, Cap
8	ZrO2,Stainless Steel	Zirconia Ferrule	17	Stainless steel	M2 hexagonal nut , 4 pcs.
7	PBT resin	Color : White	16	Stainless steel	M2 screw with spring washer , 4 pcs.
6	PBT resin	Color : Blue	15	Zinc alloy die casting	Nickel plating, 2 pcs.
5	Phosphorus bronze	Nickel plating	14	PPS resin	Color : Blown
4	Phosphorus bronze	Nickel plating	13	PA resin	Color : White
3	Silicone rubber	Hardness: 70 deg., Color: Black	12	Silicon rubber	Hardness: 70 deg., Frosted, Bore diameter: Ø6.6
2	Zinc alloy die casting	Chrome plating , Color : Black	11	Steel wire	Spring
1	Zinc alloy die casting	Chrome plating , Color : Black	10	PBT resin	Color : Black
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-K-00003095	
DESIGNED TY. SATO		CHECKED SJ. SUZUKI		DATE 20210319	
APPROVED : MT. SHIBUTANI		20141201		DRAWING NO. EDC3-177045-01	
CHECKED : YY. HIYAMA		20141201		PART NO. SW20-SCPT75-2(22)	
DESIGNED : FS. YOSHIDA		20141201		CODE NO. CL0717-5019-5-22	
DRAWN : FS. YOSHIDA		20141201		1/1	