
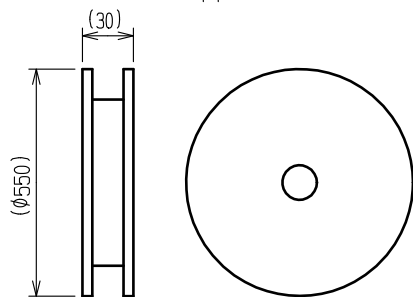
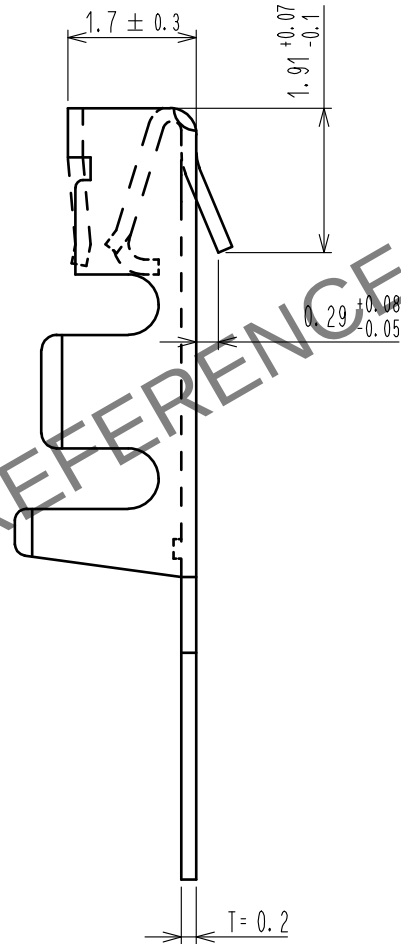


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

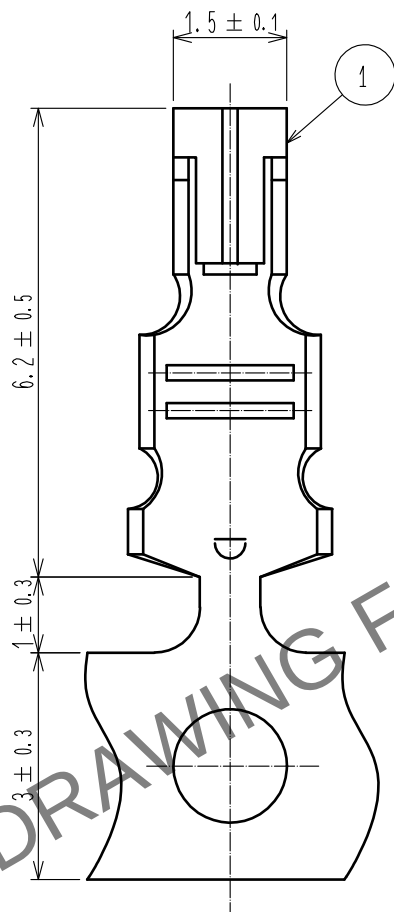


NOTE1. PER REEL: 10000 CONTACTS.

2 THE OUTER DIAMETER OF THE REEL.
(REFER TO RIGHT FIG.)

3. REGARDING HOW TO HANDLE THE PACKAGED PRODUCTS, PLEASE REFER TO
THE ATAD-T0946-00「INSTRUCTION MANUAL FOR HANDLING OF REEL PACKAGING CONTAINING CRIMP TERMINALS」

2 THE OUTER DIAMETER OF THE REEL

1	PHOSPHOR BRONZE	TIN AND AU PLATING								
NO.	MATERIAL	FINISH .			REMARKS	NO.	MATERIAL	FINISH .		REMARKS
UNITS mm		SCALE 10: 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00013628		DESIGNED AN. SAIKI		CHECKED HH. TSUKUMO	DATE 20220524
 HIROSE ELECTRIC CO., LTD.			APPROVED : AR. SHIRAI		20110805	DRAWING NO.		EDC4-166427-01		
			CHECKED : NA. HARUBAYASHI		20110805	PART NO.		GT8E-2022SCF<01>		
			DESIGNED : YN. KADOTA		20110805	CODE NO.		CL0758-0033-4-01		
			DRAWN : YN. KADOTA		20110805			 1/1		