

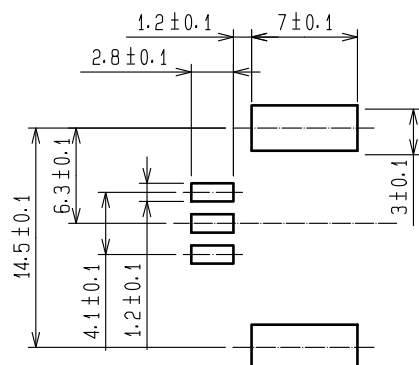
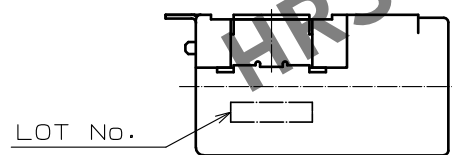
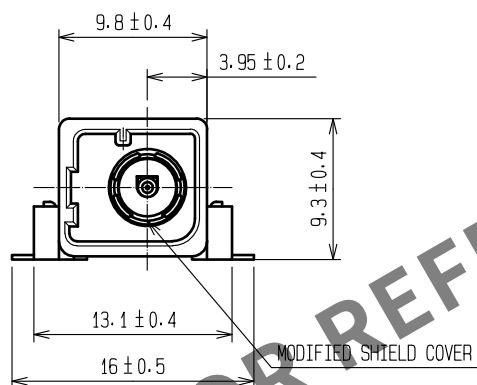
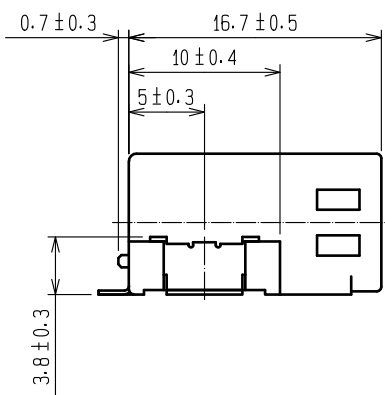
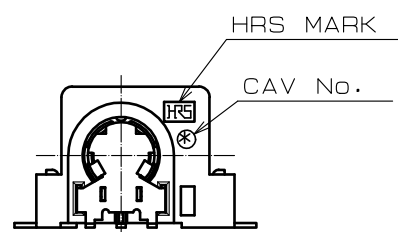


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


ELV. RoHS COMPLIANT

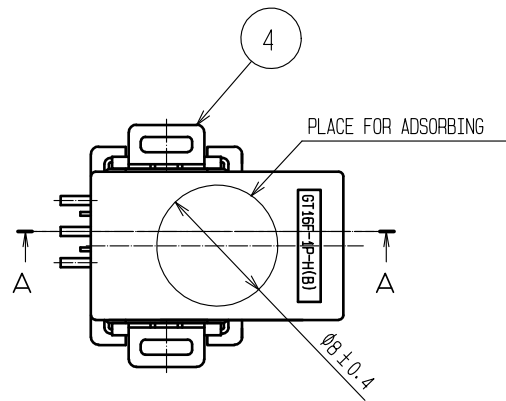


RECOMMENDED PC BOARD PATTERN

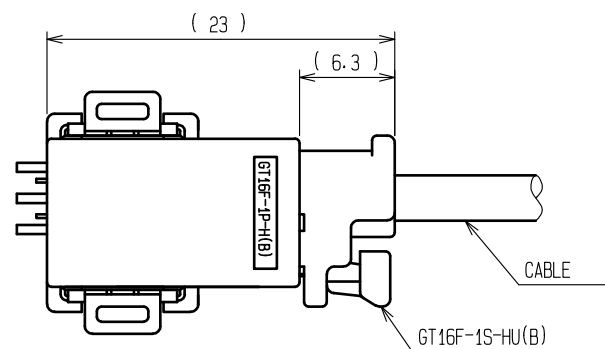


MATED CONNECTORS



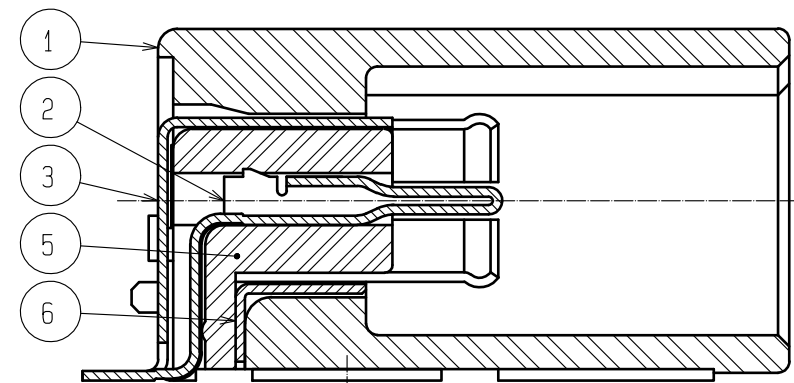


A-A (5:1)

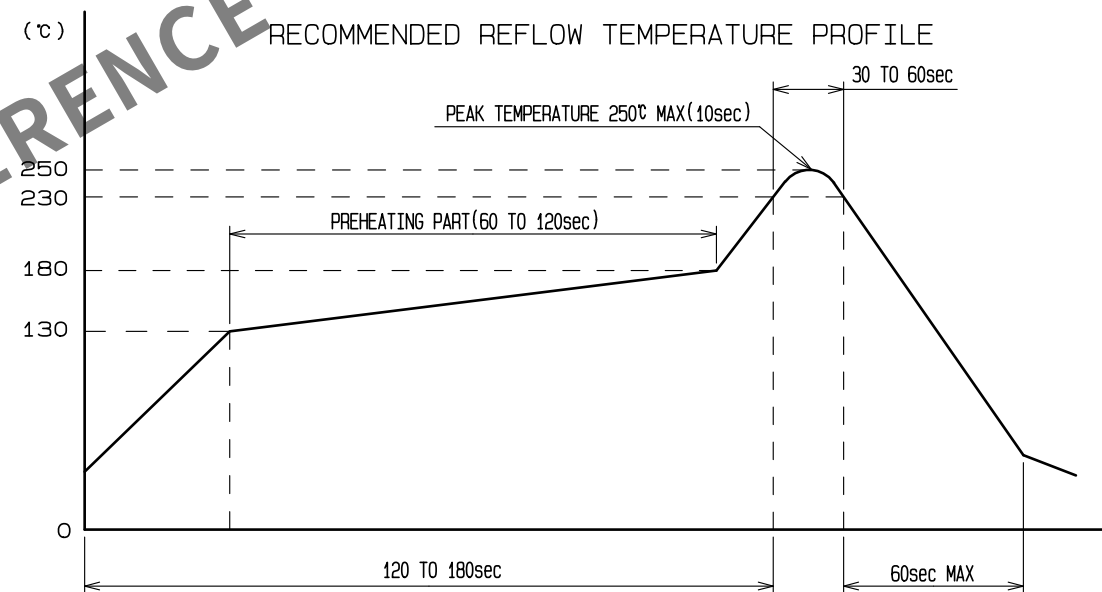

NOTE1. LEAD CO-PLANALITY INCLUDE REINFORCED FITTINGS SHALL BE 0.15mm MAX.
2. THE RECOMMENDED REFLOW TEMPERATURE PROFILE IS AS FIGURE.

3	PHOSPHOR BRONZE	TIN PLATED	6	PHOSPHOR BRONZE	TIN PLATED					
2	PHOSPHOR BRONZE	TIN PLATED	5	PPS	NATURAL					
1	PPS	GREEN	4	BRASS	TIN PLATED					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED :NH. NAKATA		15. 09. 03		DRAWING NO. EDC-166680-00-00				
		CHECKED :KI. HIROKAWA		15. 09. 03		PART NO. GT16F-1P-H(B)				
		DESIGNED :ming. jiang		15. 08. 24		CODE NO. CL766-0079-0-00				
		DRAWN :ming. jiang		15. 08. 24		 				

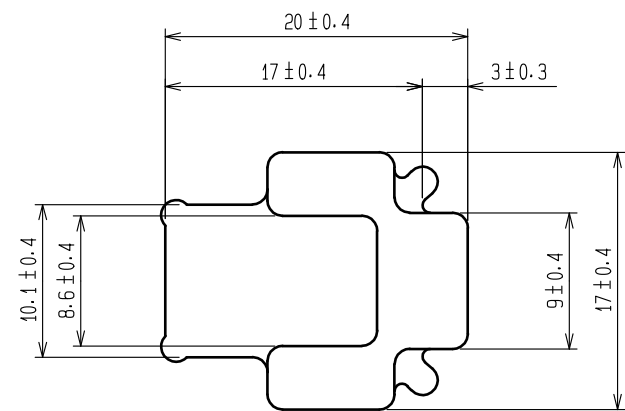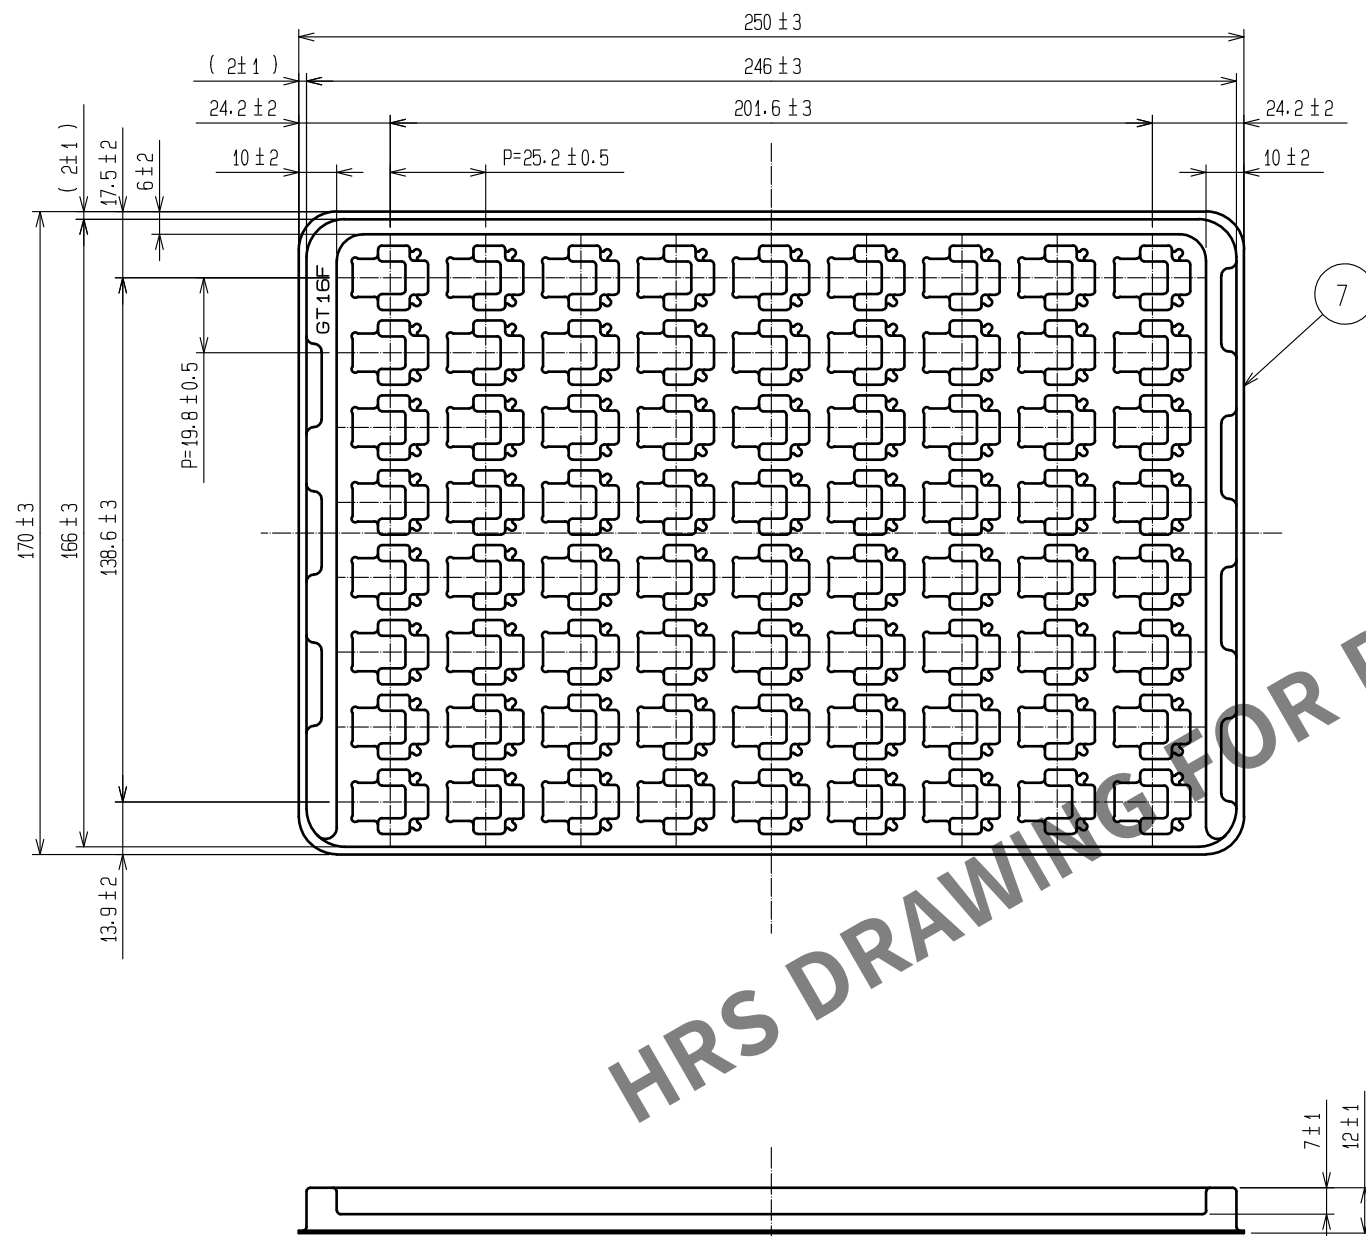

MATING FACE SIDE

NOTE 1.72 CONNECTORS ARE PACKED IN A TRAY.

7	PS	TRAY, TRANSLUCENT			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 1 : 2	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA	15. 09. 03	DRAWING NO.	EDC-166680-00-00
		CHECKED : KI. HIROKAWA	15. 09. 03	PART NO.	GT16F-1P-H(B)
		DESIGNED : ming. jiang	15. 08. 24	CODE NO.	CL766-0079-0-00
		DRAWN : ming. jiang	15. 08. 24		