

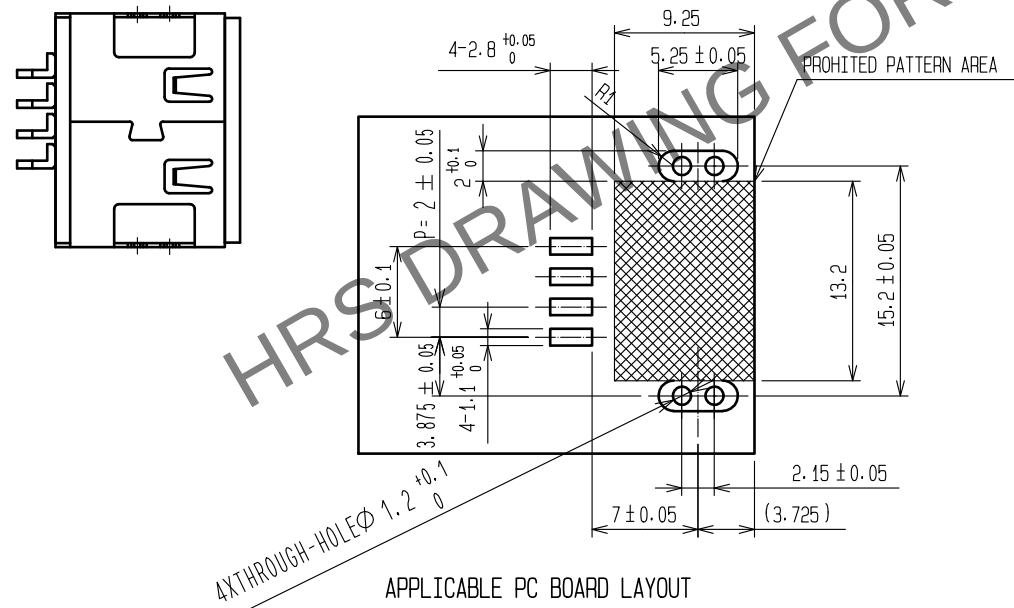
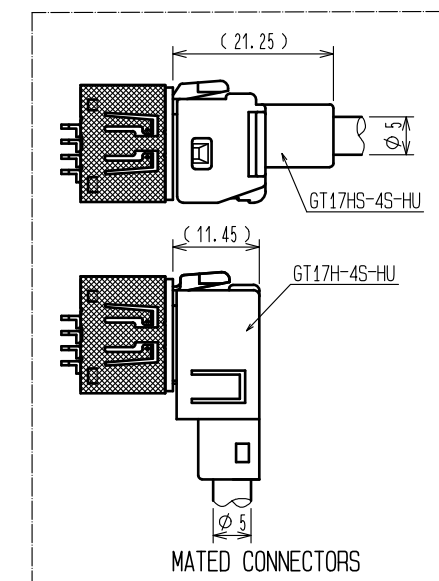


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RoHS, ELV COMPLIANT

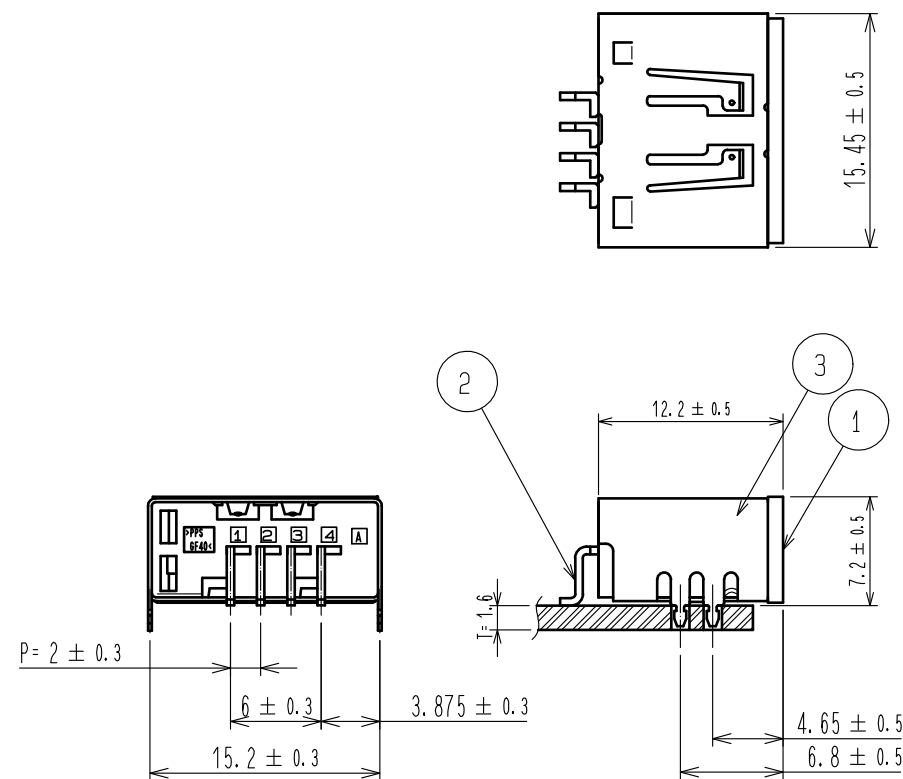


RECOMMENDED REFLOW PROFILE

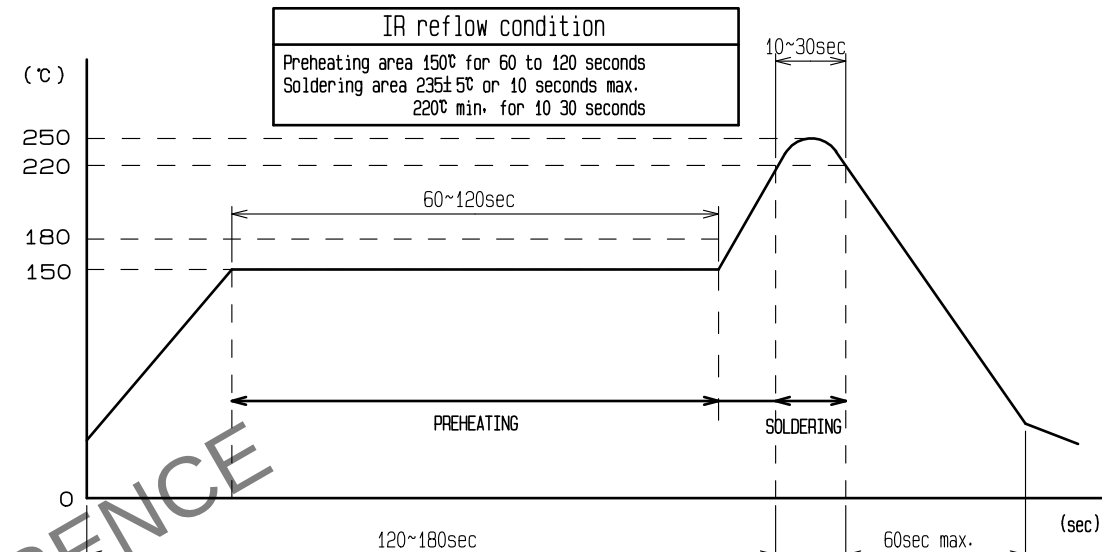

Note1. The soldering process is allowed up to twice under the same condition. However, the interval between the first and second process must be maintained at the room temperature.
Note2. The temperature indicates the board surface temperature on the connector lead area.

PACKAGEING STYLE

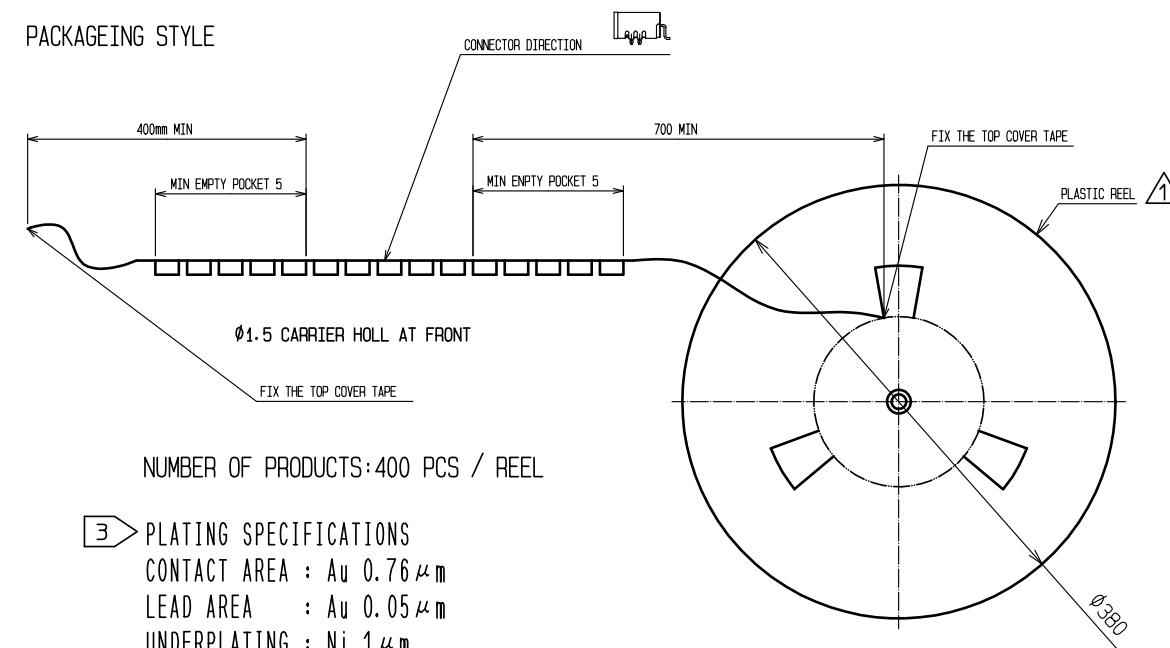

3 PLATING SPECIFICATIONS
CONTACT AREA : Au $0.76 \mu\text{m}$
LEAD AREA : Au $0.05 \mu\text{m}$
UNDERPLATING : Ni $1 \mu\text{m}$

CL767-0083-3 GT17H-4P-2H COLOR : LIGHT GRAY	CL767-0170-6 GT17H-4P-2H(A) COLOR : BROWN	CL767-0171-9 GT17H-4P-2H(B) COLOR : GREEN	CL767-0172-1 GT17H-4P-2H(C) COLOR : BLUE
MATING INSULATOR : CL767-0084-6 GT17H-4S-2C COLOR : LIGHT GRAY	MATING INSULATOR : CL767-0167-1 GT17H-4S-2C(A) COLOR : BROWN	MATING INSULATOR : CL767-0168-4 GT17H-4S-2C(B) COLOR : GREEN	MATING INSULATOR : CL767-0169-7 GT17H-4S-2C(C) COLOR : BLUE

2	BRASS	3		4					
1	PPS	LIGHT GRAY		3	COPPER ALLOY	Sn 1.0μm			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm			SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00006444	DESIGNED KK. FURUKAWA	CHECKED EJ. WAKATSUKI	DATE 20200910
 HIROSE ELECTRIC CO., LTD.			APPROVED : NH. NAKATA		20151007	DRAWING NO. EDC-166354-01-00			
			CHECKED : KI. HIROKAWA		20151007	PART NO. GT17H-4P-2H(C01)			
			DESIGNED : TK. SUZUKI		20151007	CODE NO. CL767-0083-3-01			
			DRAWN : TK. SUZUKI		20151007	 1/1			