

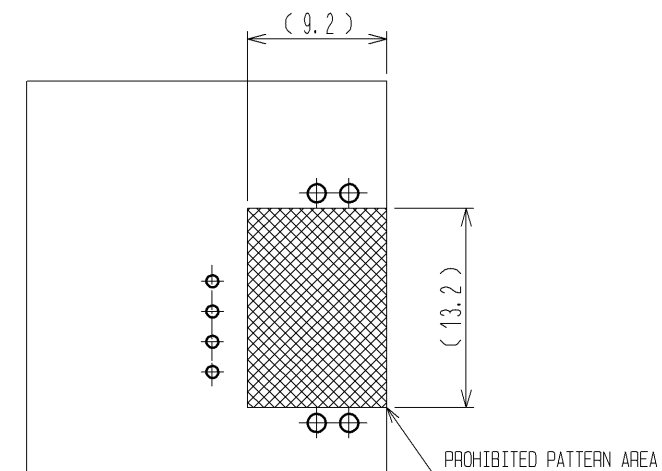


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT

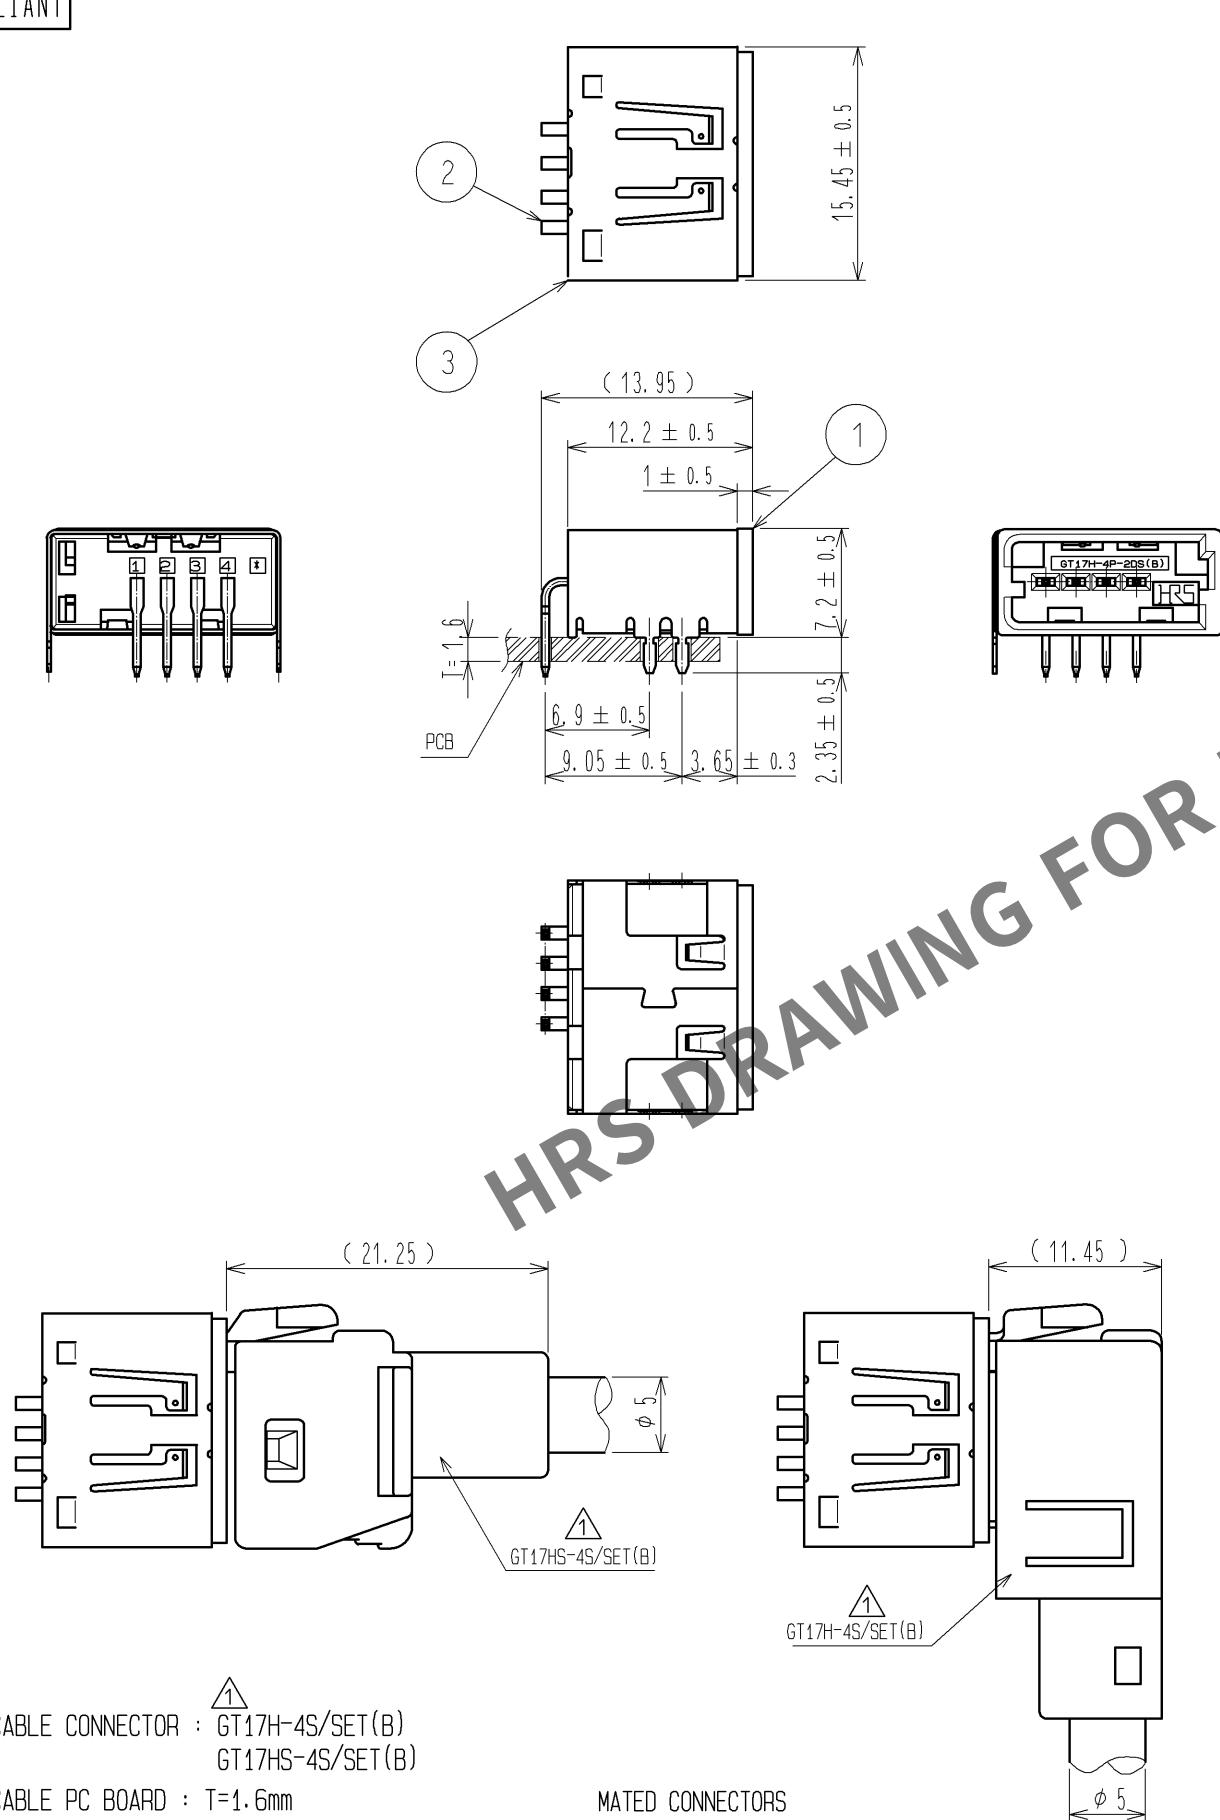

RECOMMENDED PCB PATTERN
(CONNECTOR SIDE)

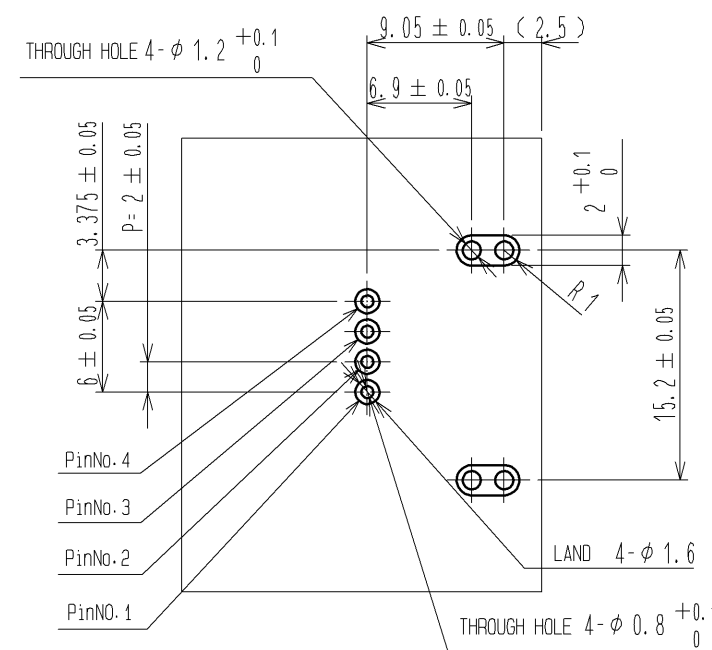




RECOMMENDED PCB PATTERN
(SOLDERING SIDE)

NOTE1. APPLICABLE CONNECTOR : $\triangle$ GT17H-4S/SET(B)
GT17HS-4S/SET(B)
2. APPLICABLE PC BOARD : T=1.6mm


MATED CONNECTORS

3	COPPER ALLOY	TIN PLATING	5	PS	
2	BRASS	TIN PLATING	4	PS	
1	PPS	GREEN			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT $\triangle$ 3	DESCRIPTION OF REVISIONS DIS-T-002037	DESIGNED NH. NAKATA
HIROSE ELECTRIC CO., LTD.		APPROVED : AR. SHIRAI	10.12.09	DRAWING NO.	EDC3-167221-00
		CHECKED : NH. NAKATA	10.12.09	PART NO.	GT17H-4P-2DS(B)
		DESIGNED : MH. SHOUJI	10.12.08	CODE NO.	CL767-0211-1-00
		DRAWN : MH. SHOUJI	10.12.08		
					10.12.09

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

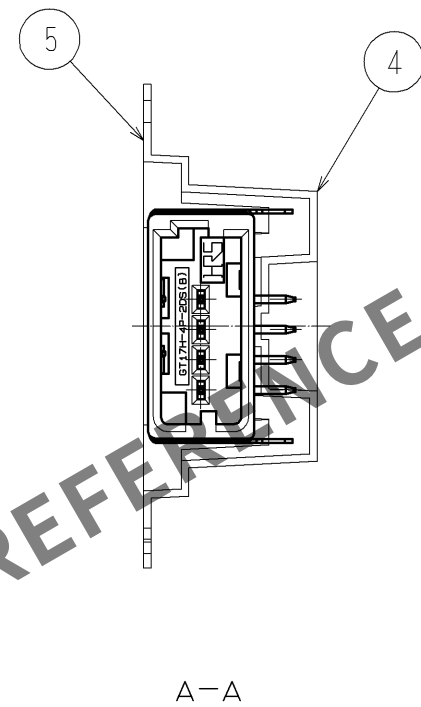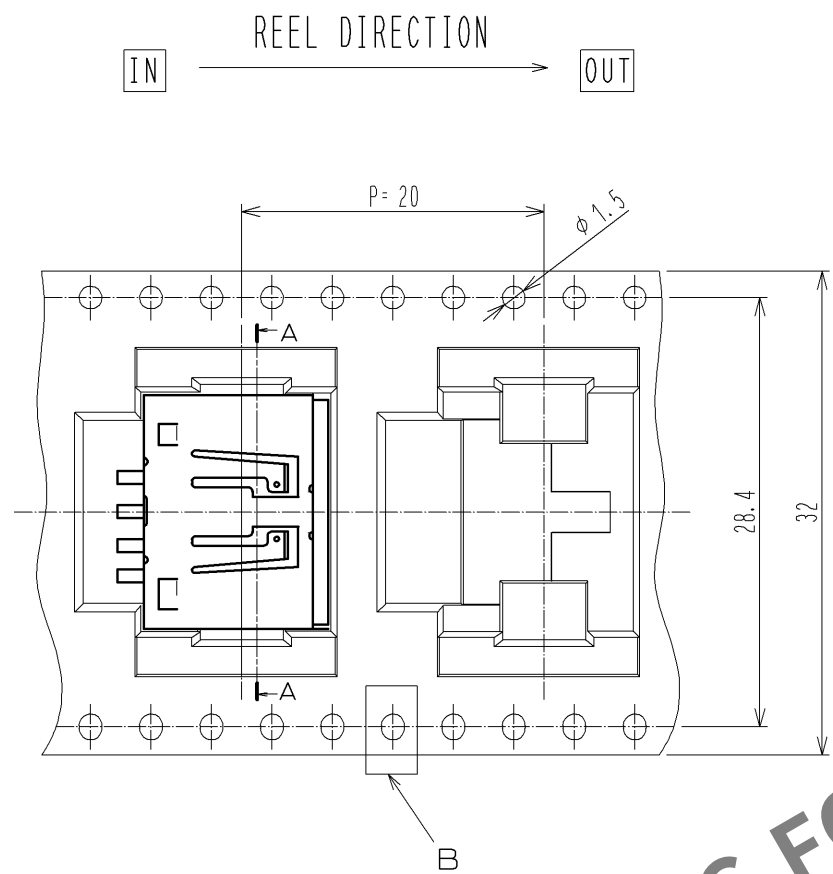

PACKAGE STYLE

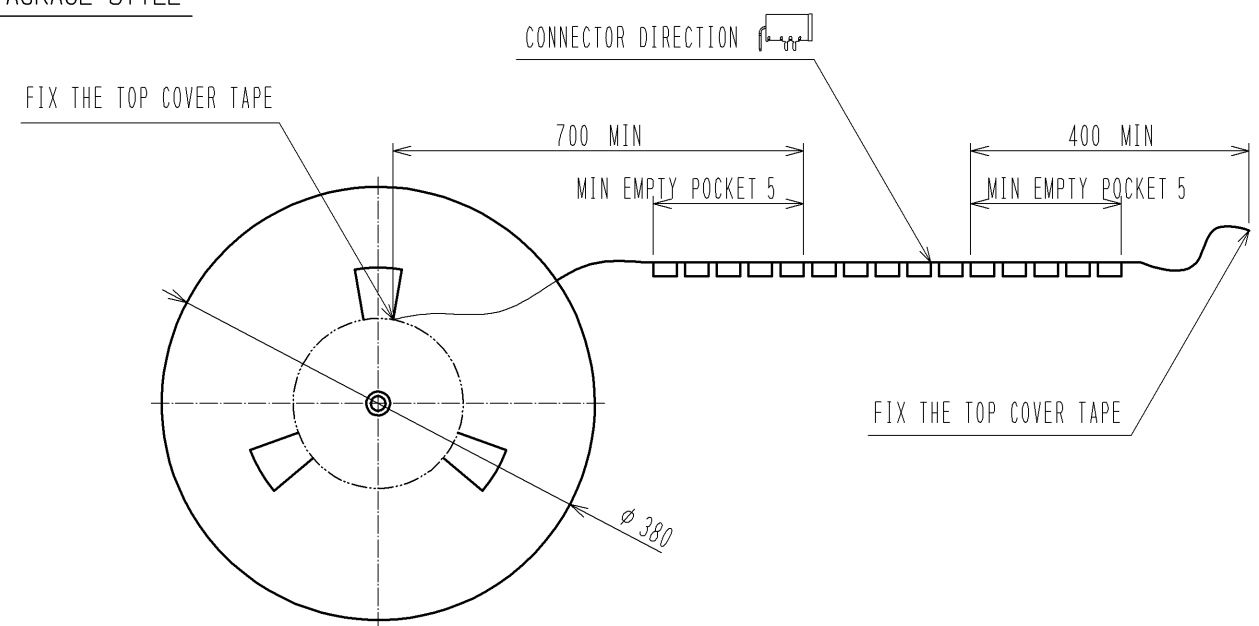

Package style

1. 300 PCS. / REEL
2. TOP COVER TAPE PEEL FORCE TO BE 0.1 TO 0.7 N AFTER SEALING.

HRS

DRAWING NO.	EDC3-167221-00
PART NO.	GT17H-4P-2DS(B)
CODE NO.	CL767-0211-1-00

2/2