

COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△	△						△					
△	△						△					
△	△						△					
△	△						△					



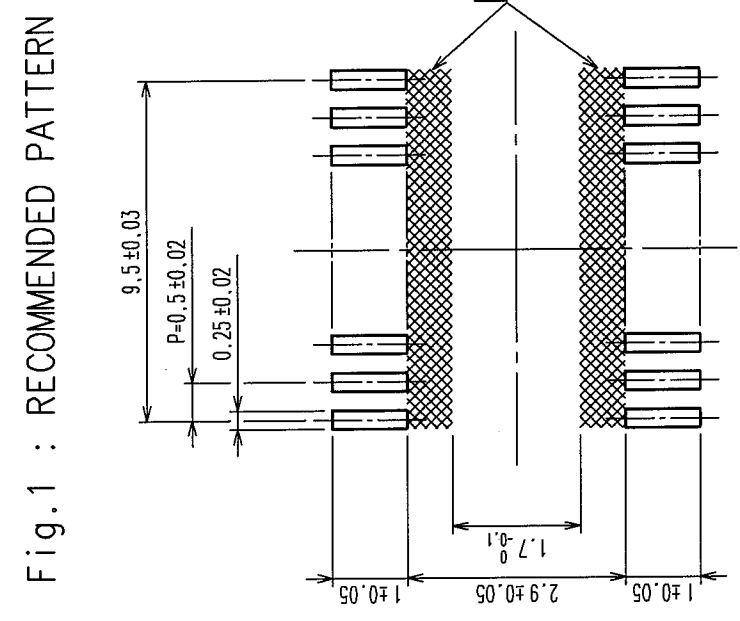


Fig.1 : RECOMMENDED PATTERN Fig.2 : PLATING SPECIFICATION (40:1)

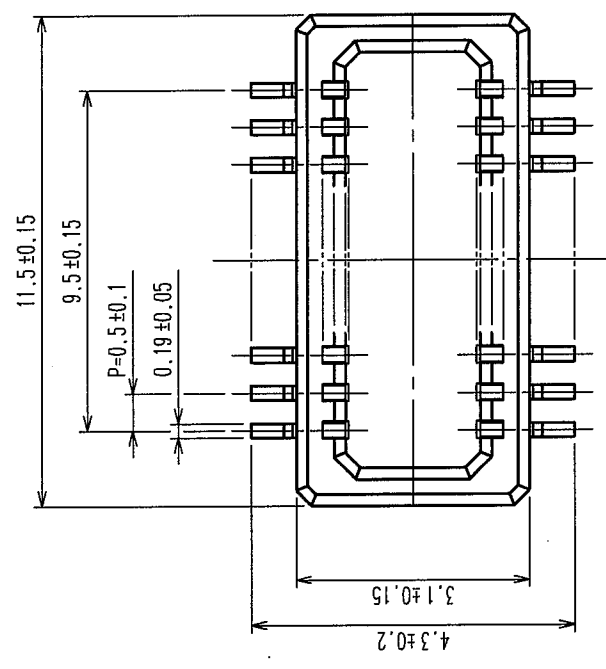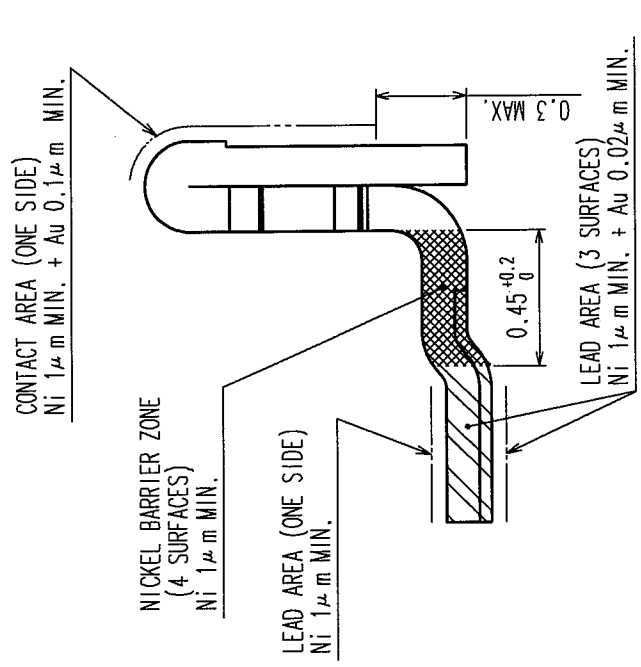

OTHERS : Ni 1μm MIN. + Au FLASH

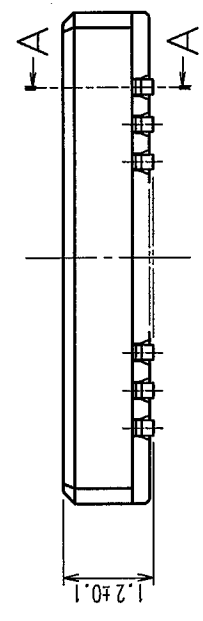


Fig.3 : A-A CROSS SECTION VIEW


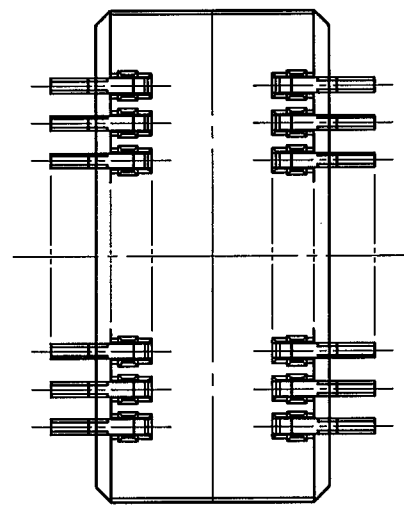


Fig.4 : MATING VIEW

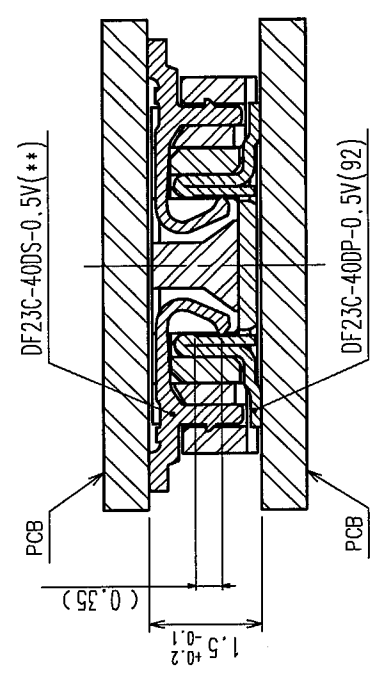

NOTES 1 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2 REFER TO Fig.2
3 WHEN A PART MARKED WITH HAS A PATTERN BUT NO RESIST ON IT, TAKE CARE TO PREVENT THE CONNECTOR FROM TOUCHING IT.

2	PHOSPHOR BRONZE	2	4	POLYESTER	CLEAR		
1	LCP	BLACK, UL94V-0	3	PS	CLEAR		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			F. Matsuki	T. Yamamoto	T. Sakata	T. Sakata	
			'04.01.15	'04.1.15	'04.1.16	'04.1.16	.
		DRAWING NO.		PART NO.		F	
SCALE		EDC3-164005-02		DF23C-40DP-0.5V(92)			
10 : 1							
UNITS		HRS		CODE NO.		1 / 2	
mm		HIROSE ELECTRIC CO., LTD		CL688-0803-3-92			

TO				
----	--	--	--	--

