

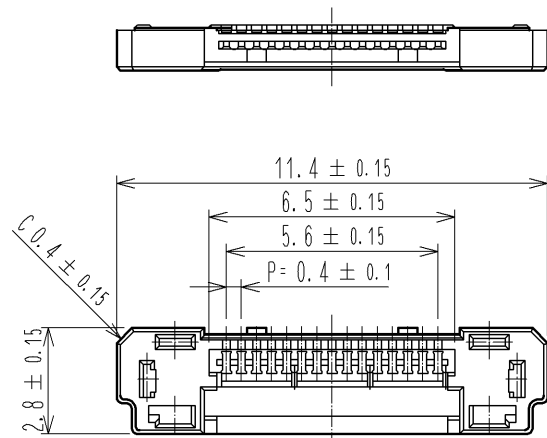


RECOMMENDED CABLE SUBASSEMBLY

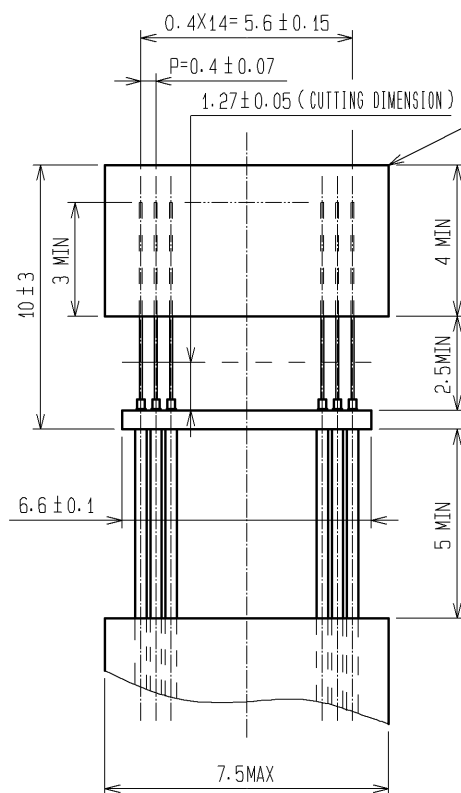


TAPING TO PREVENT FROM PITCH DEVIATION




LAMINATE TAPE

B(FREE)

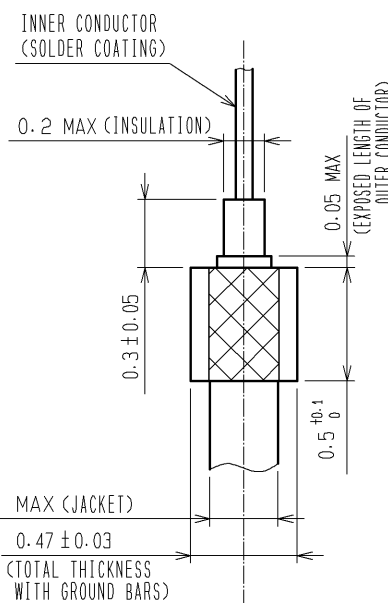


A-A(FREE)

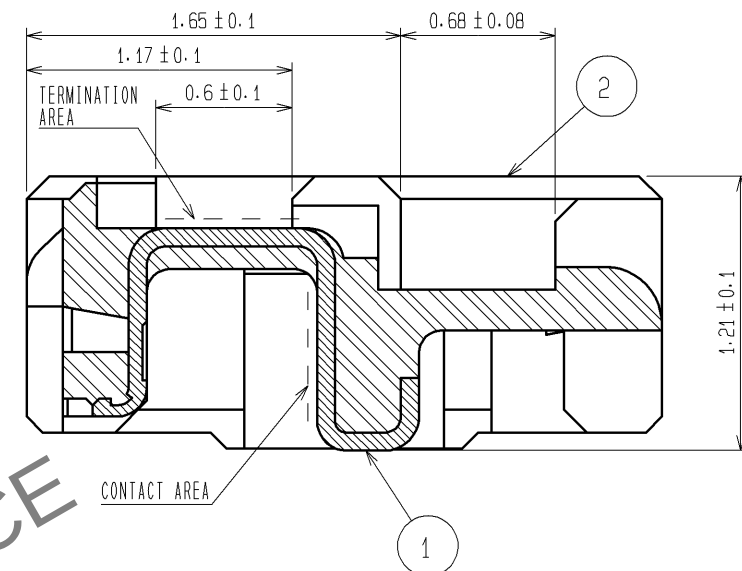

CABLE TERMINATION FIGURE (FREE)

DF36A-15P-SHL or DF36-15P-SHL

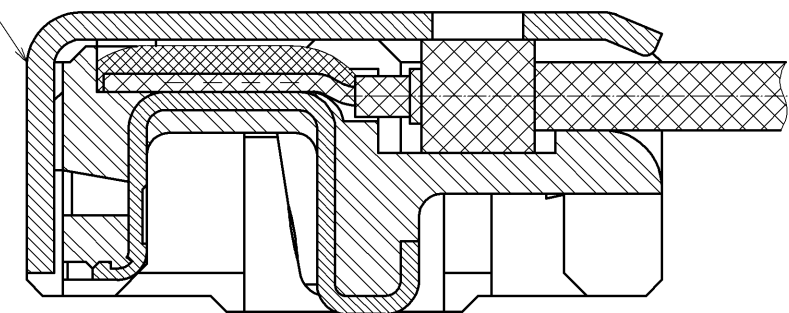


- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42-AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS *CONNECTOR UNIT AND METAL SHIELDING*. REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No. APPLICABLE SHELL IS DIFFERENT DEPENDING ON THE PART No. OF MATED CONNECTOR. USE DF36A-15P-SHL FOR DF36A-15S-0.4V(**), USE DF36-15P-SHL FOR DF36-15S-0.4V(**).

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF36C-15P-0.4SD(55)	CL662-4035-2-55
-	METAL SHIELDING	DF36A-15P-SHL	CL662-4511-7-00
-	METAL SHIELDING	DF36-15P-SHL	CL662-4526-1-00

4. BLACK MARKS MAY OCCASIONALLY OCCUR IN MOLD RESIN, YET THEY NOT AFFECT CONNECTOR QUALITY.

2	LCP	UL94V-0, BEIGE	5	PS	BLACK
1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.1μm min TERMINATION AREA : GOLD PLATING 0.1μm min UNDER PLATING : NICKEL PLATING 1μm min	4	POLYESTER	CLEAR
			3	PS	CLEAR
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 5 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
		APPROVED : MH. YAMANE CHECKED : MH. TSUCHIDA DESIGNED : AH. MIYAZAKI DRAWN : AH. MIYAZAKI	14. 05. 27 14. 05. 27 14. 05. 26 14. 05. 26		
		DRAWING NO. PART NO. CODE NO.		EDC3-320250-02 DF36C-15P-0.4SD(55) CL662-4035-2-55	
				△ 1/2	

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

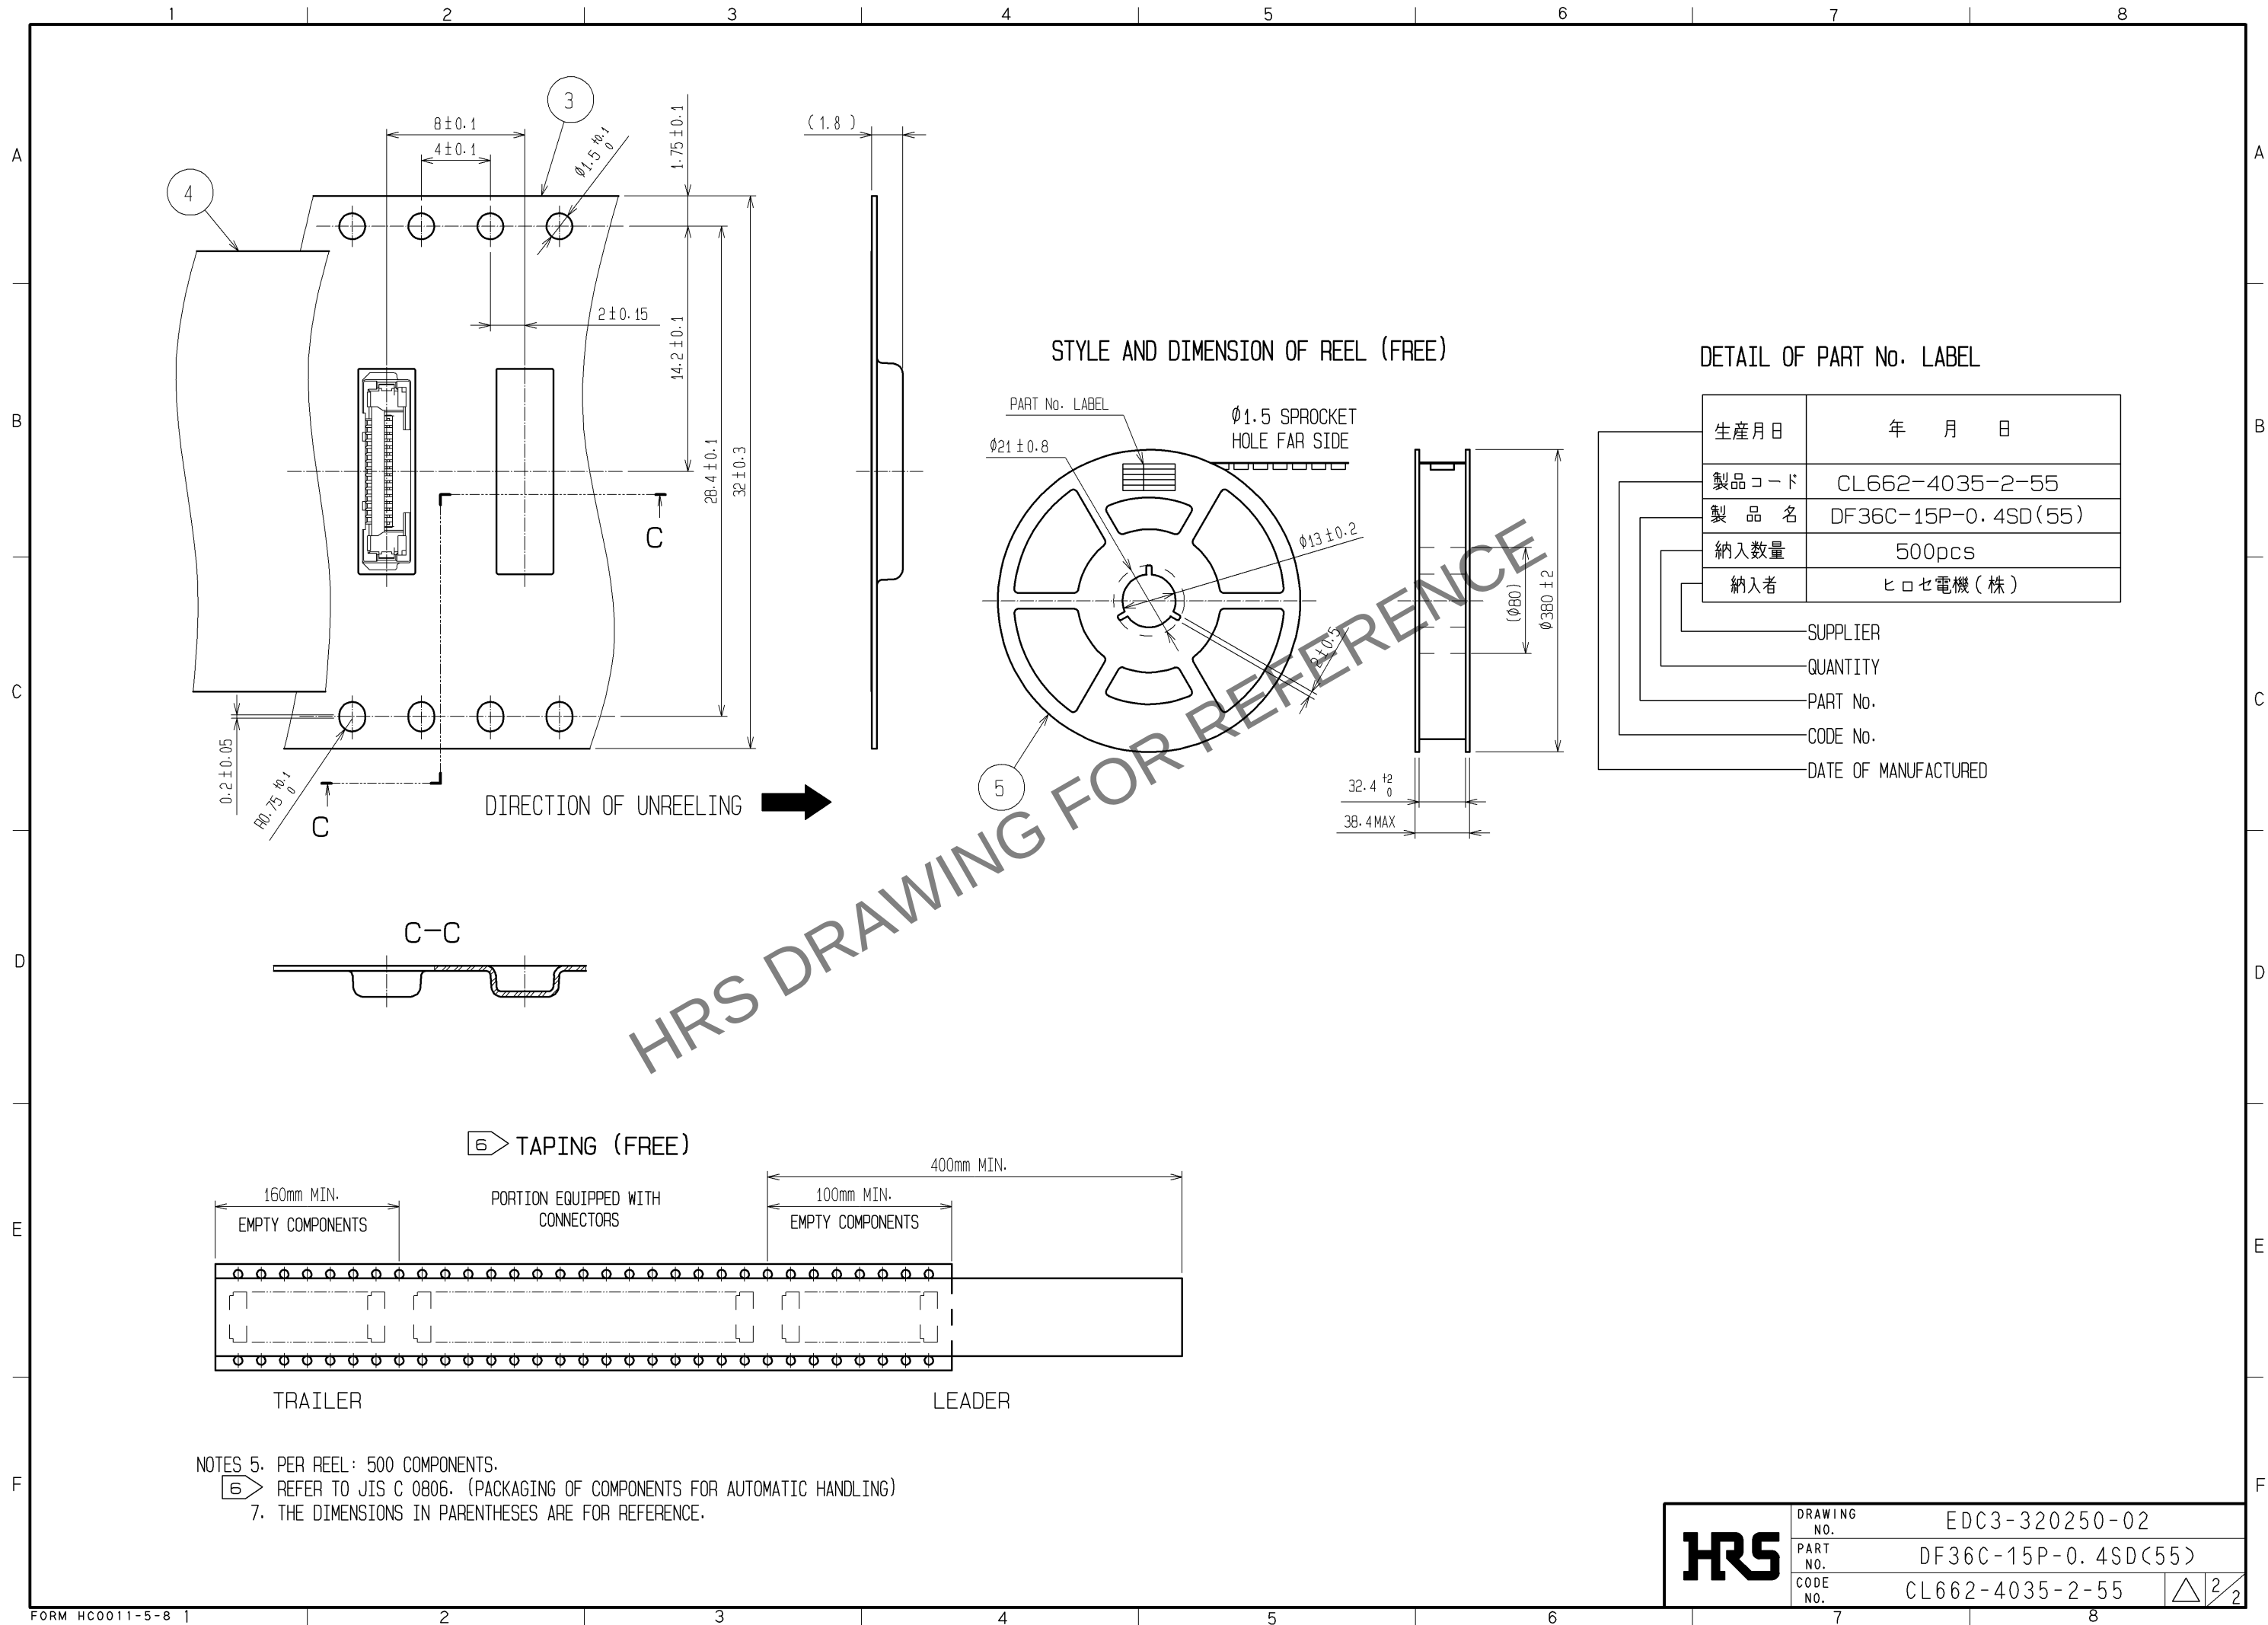

HRS	DRAWING NO.	EDC3-320250-02
	PART NO.	DF36C-15P-0.4SD(55)
	CODE NO.	CL662-4035-2-55