


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

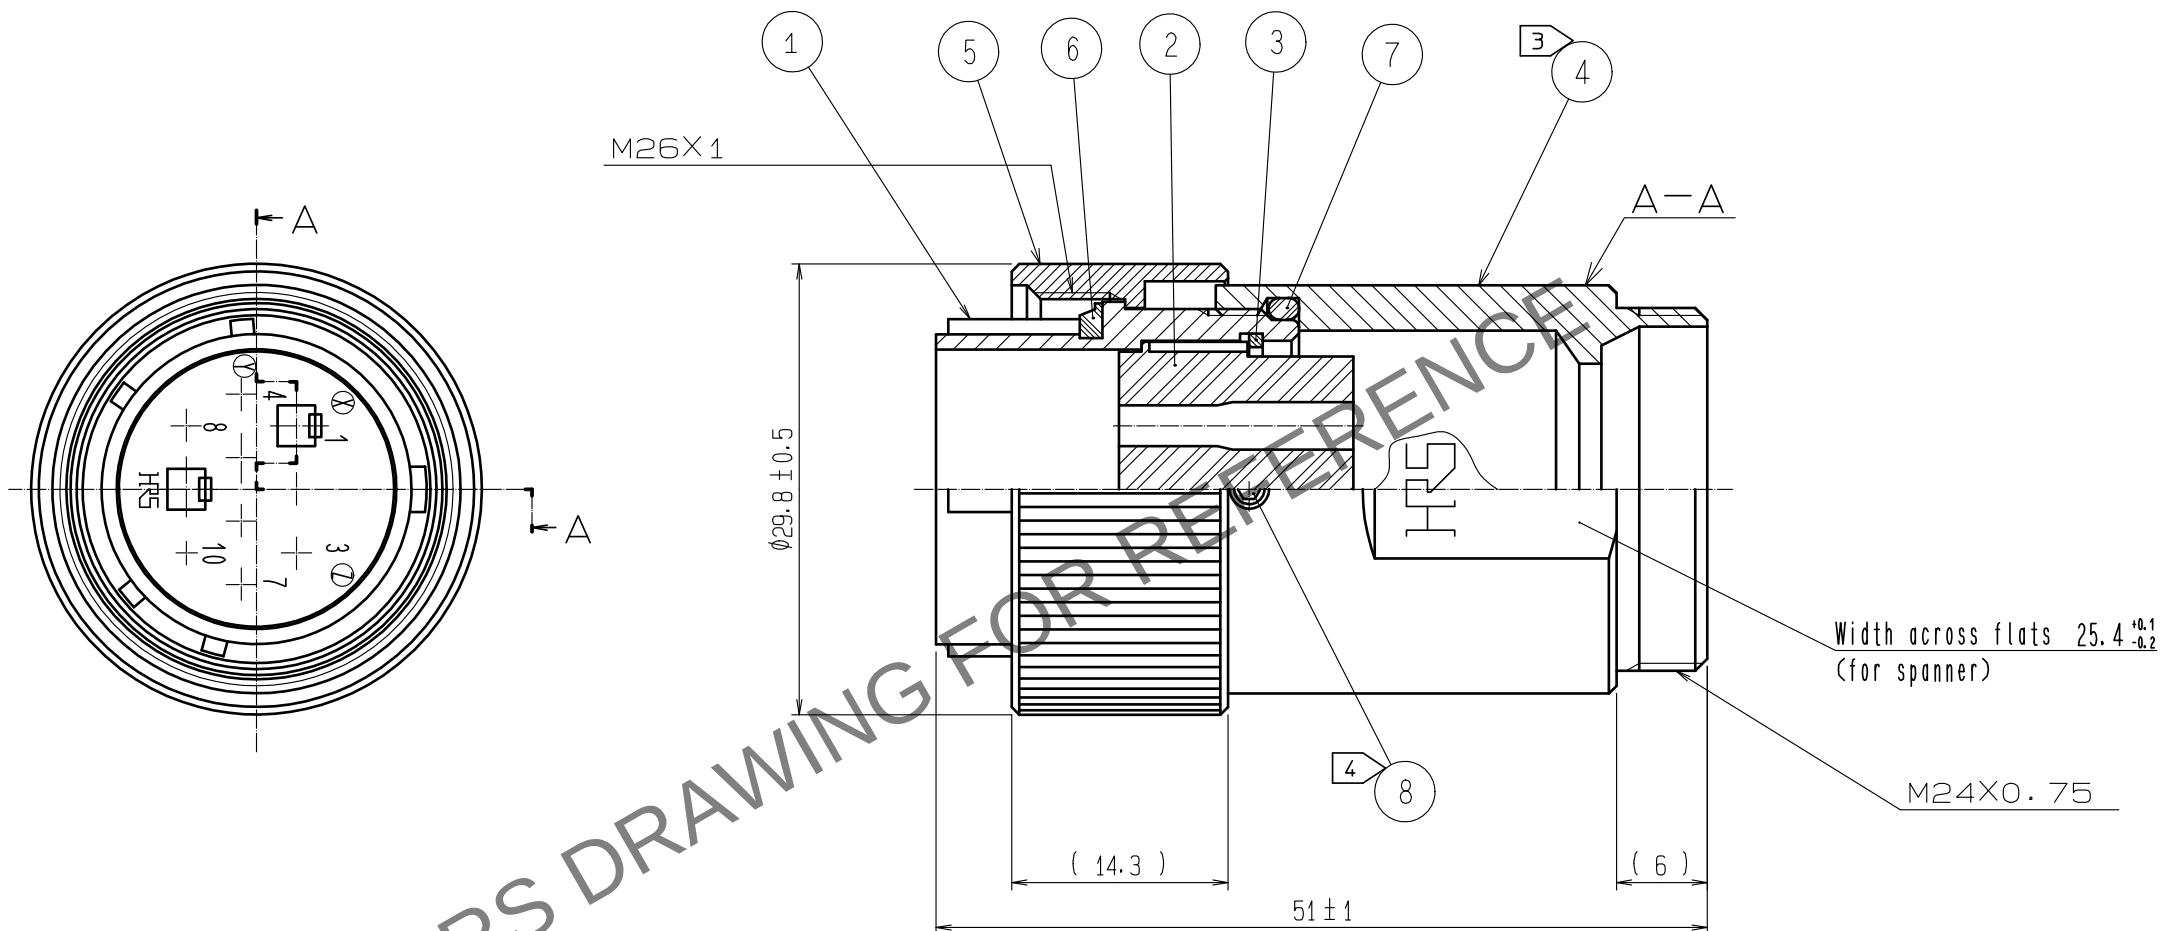

- Notes
- 1 Applicable crimp contact : JRC-PC-212(AWG #16 to 20)
 - 2 Applicable contact removal tool(extraction tool) : JRC-TP
 - 3 The recommended clamp torque, REF. No. ④ : 4 to 4.5 N·m.
 - 4 The recommended clamp torque, REF. No. ⑧ : 0.2 to 0.25 N·m.
and LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent from loosening.
 - 5 One example of the rotation of REF. No. ④ to REF. No. ① is shown.
 - 6 This product to be used with cableclamp, JR21WCC-※
※Designate diameter of applicable cable.
 - 7 The cable pull and twisting strength and other characteristics may differ,
depending on the cable structure.
Please confirm before the use.

4	BRASS	BLACK CHROME PLATING	8	STAINLESS STEEL	HEX SOCKET SET SCREW HEX : 1.27
3	PHOSPHOR BRONZE	NICKEL PLATING	7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
2	POLYCARBONATE	(BLACK) UL94V-0	6	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
1	ALUMINUM ALLOY	BLACK CHROME PLATING	5	BRASS	BLACK CHROME PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	18. 02. 26	DRAWING NO.	EDC-110651-31-00
		CHECKED : HY. KOBAYASHI	18. 02. 26	PART NO.	JR21WP-10PCC(31)
		DESIGNED : TH. KAMEYA	18. 02. 24	CODE NO.	CL114-2115-4-31
		DRAWN : MK. INOUE	18. 02. 14		1/1