

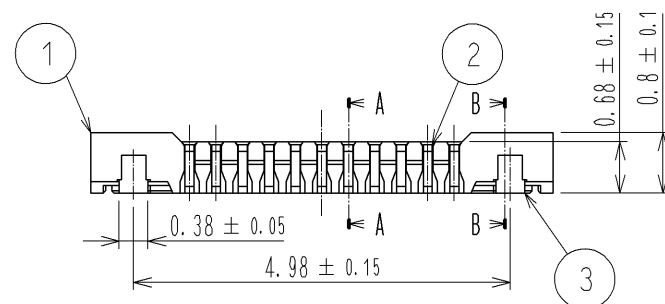
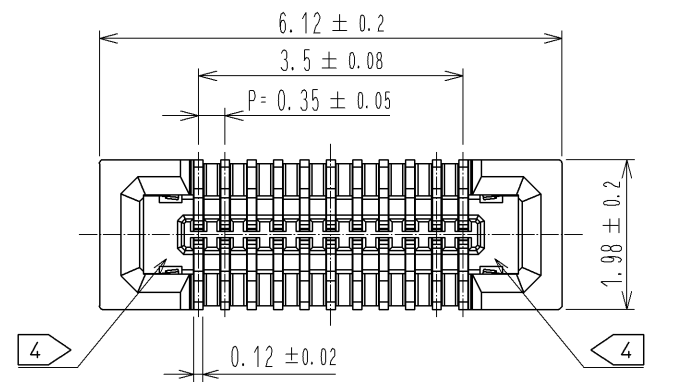
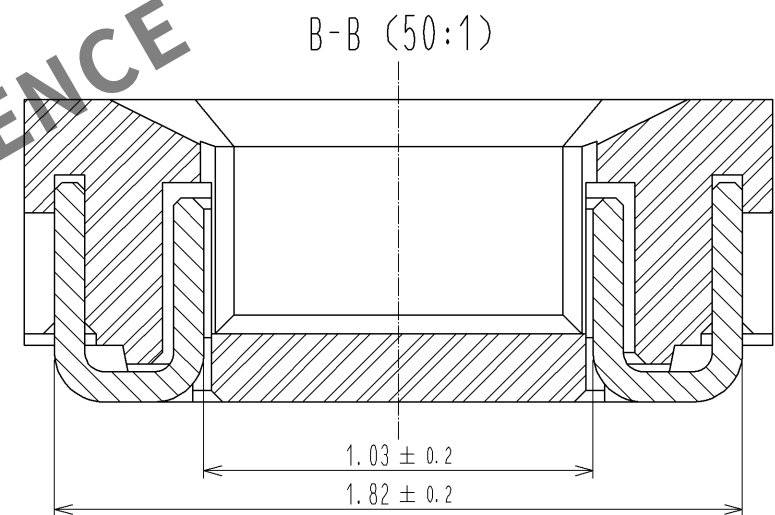


- NOTE) 1 . ALL LEAD CO-PLANARITY SHALL BE 0.08mm MAX
2 CONTACT PLATING SPECIFICATIONS.
CONTACT AREA : GOLD 0.05 μ m MIN
SMT LEAD : GOLD 0.05 μ m MIN
UNDERPLATING : NICKEL 1 μ m MIN
(SURFACE : SEALING)
3 REINFORCED METAL FITTINGS LOCK
SMT LEAD : GOLD 0.05 μ m MIN
UNDERPLATING : NICKEL 1 μ m MIN
(SURFACE : SEALING)
4 CAV NO. AND HRS MARK MAY BE INDICATED IN APPROX POSITION SHOWN.

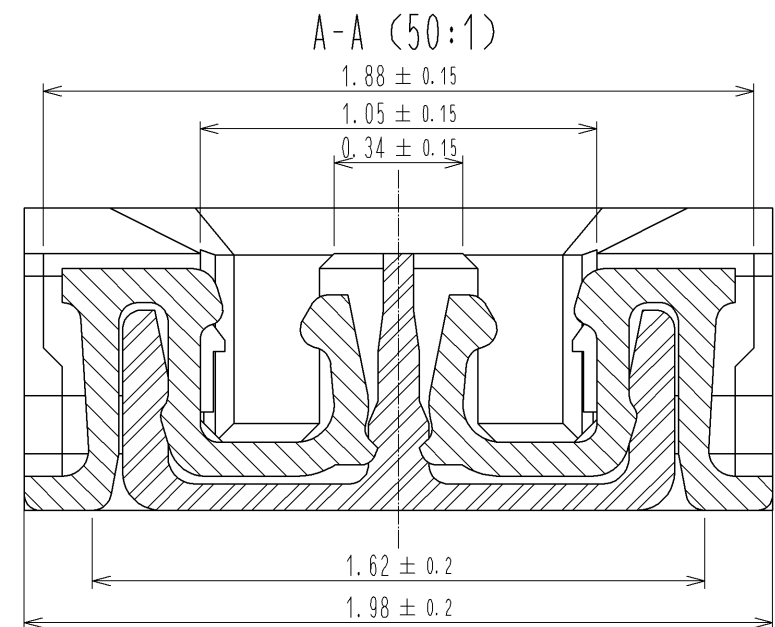


ENGAGEMENT FIGURE (50:1)

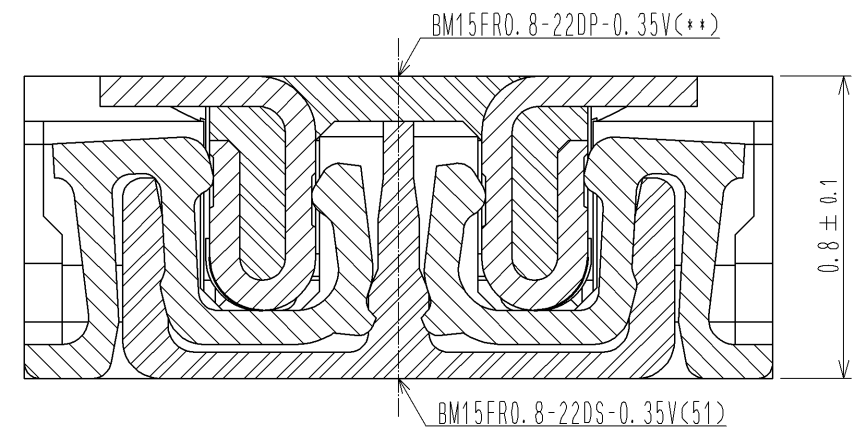


4	PS	CLEAR (ENBOSSED CARRIER TAPE)			
3	PHOSPHOR BRONZE	3	7	PS	CLEAR (REINFORCEMENT COLLAR)
2	PHOSPHOR BRONZE	2	6	PS	BLACK (PLASTIC REEL)
1	LCP	UL94 V-0, BLACK	5	POLYESTER	CLEAR (COVER TAPE)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 10 : 1	COUNT 1	DESCRIPTION OF REVISIONS	DESIGNED
		APPROVED : KH. IKEDA	13.12.05	DRAWING NO.	EDC3-352577-01
		CHECKED : YH. MICHIDA	13.12.05	PART NO.	BM15FR0.8-22DS-0.35V(51)
		DESIGNED : YK. KOBAYASHI	13.12.02	CODE NO.	CL673-1220-1-51
		DRAWN : YK. KOBAYASHI	13.12.02		
				DATE	1/3

◆ RECOMMENDED PCB LAYOUT

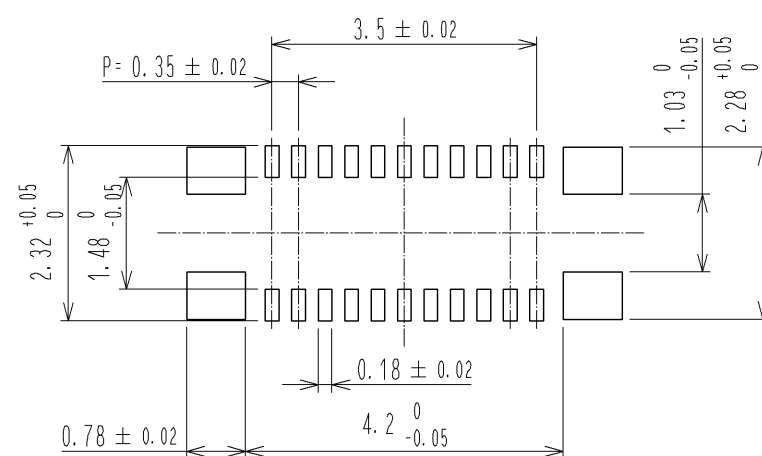


RECOMMENDED METAL MASK DIMENSIONS

METAL MASK THICKNESS : $100\mu\text{m}$

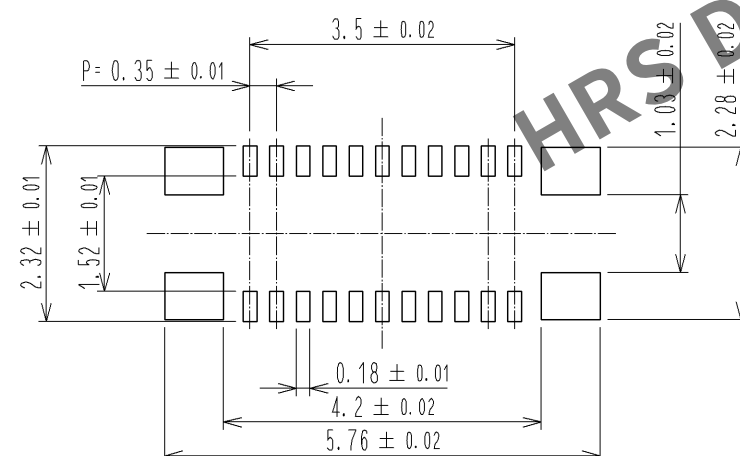

5) RECOMMENDED REFLOW TEMPERATURE PROFILE
USING LEAD-FREE SOLDER PASTE.

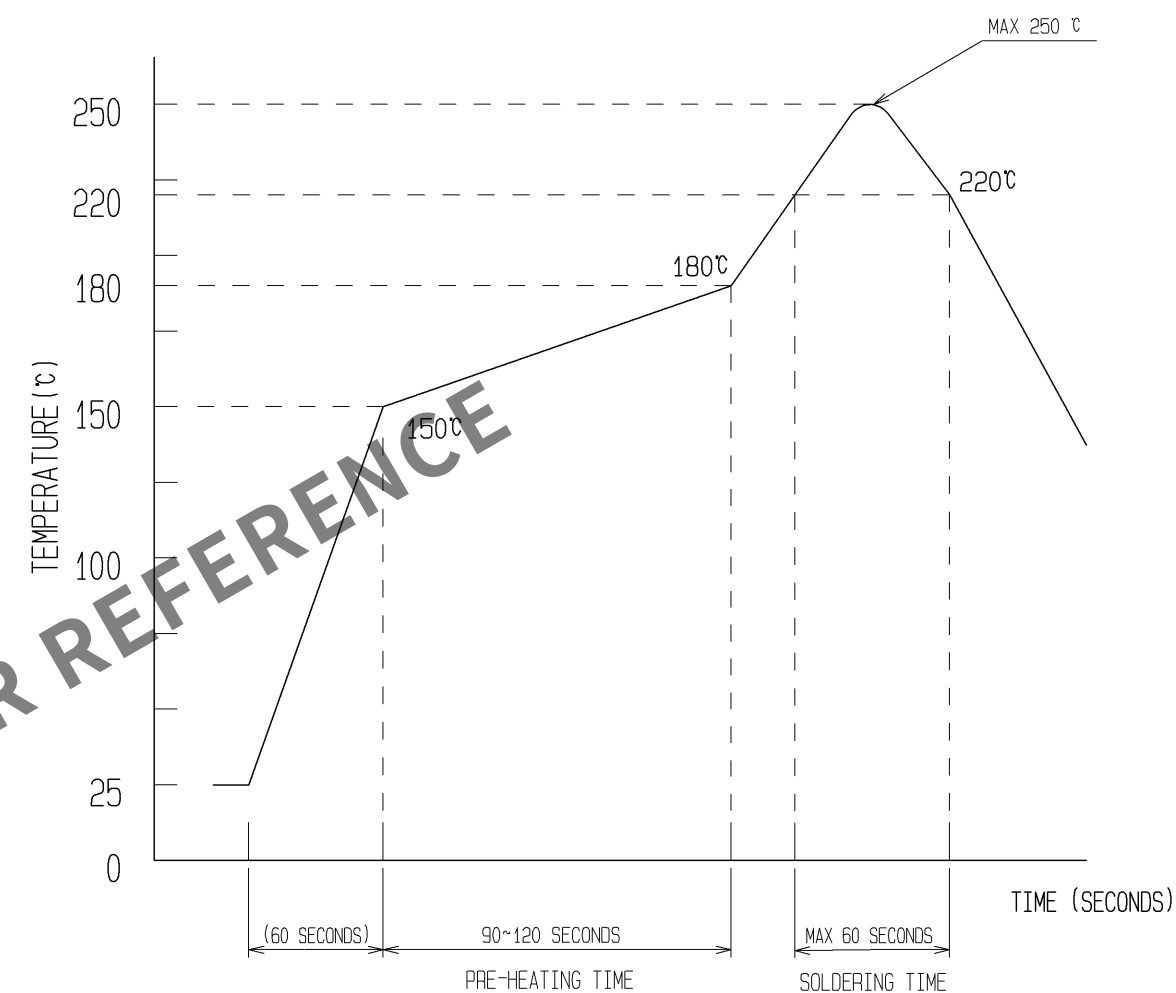

REFLOW METHOD: IR REFLOW

NUMBER OF REFLOW CYCLES: 2 CYCLES MAX.

- 1) REFLOW TIME
DURATION ABOVE 220°C, 60 SEC. MAX.
(PEAK TEMPERATURE: 250°C MAX)
- 2) PRE-HEAT TIME
PRE-HEAT TEMPERATURE(MIN): 150°C
PRE-HEAT TEMPERATURE(MAX): 180°C
PRE-HEAT TIME: 90-120 sec.

5 THIS TEMPERATURE PROFILE IS PER THE CONDITIONS SHOWN ABOVE. ADDITIONAL FACTORS, SUCH AS SOLDER PASTE TYPE, PCB SIZE AND OTHER MOUNTED COMPONENTS COULD AFFECT THE PROFILE. THEREFORE, A THOROUGH EVALUATION OF MOUNTING CONDITION IS REQUIRED PRIOR TO PRODUCTION. TEMPERATURE IS MEASURED AT CONTACT LEAD.

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

