




Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

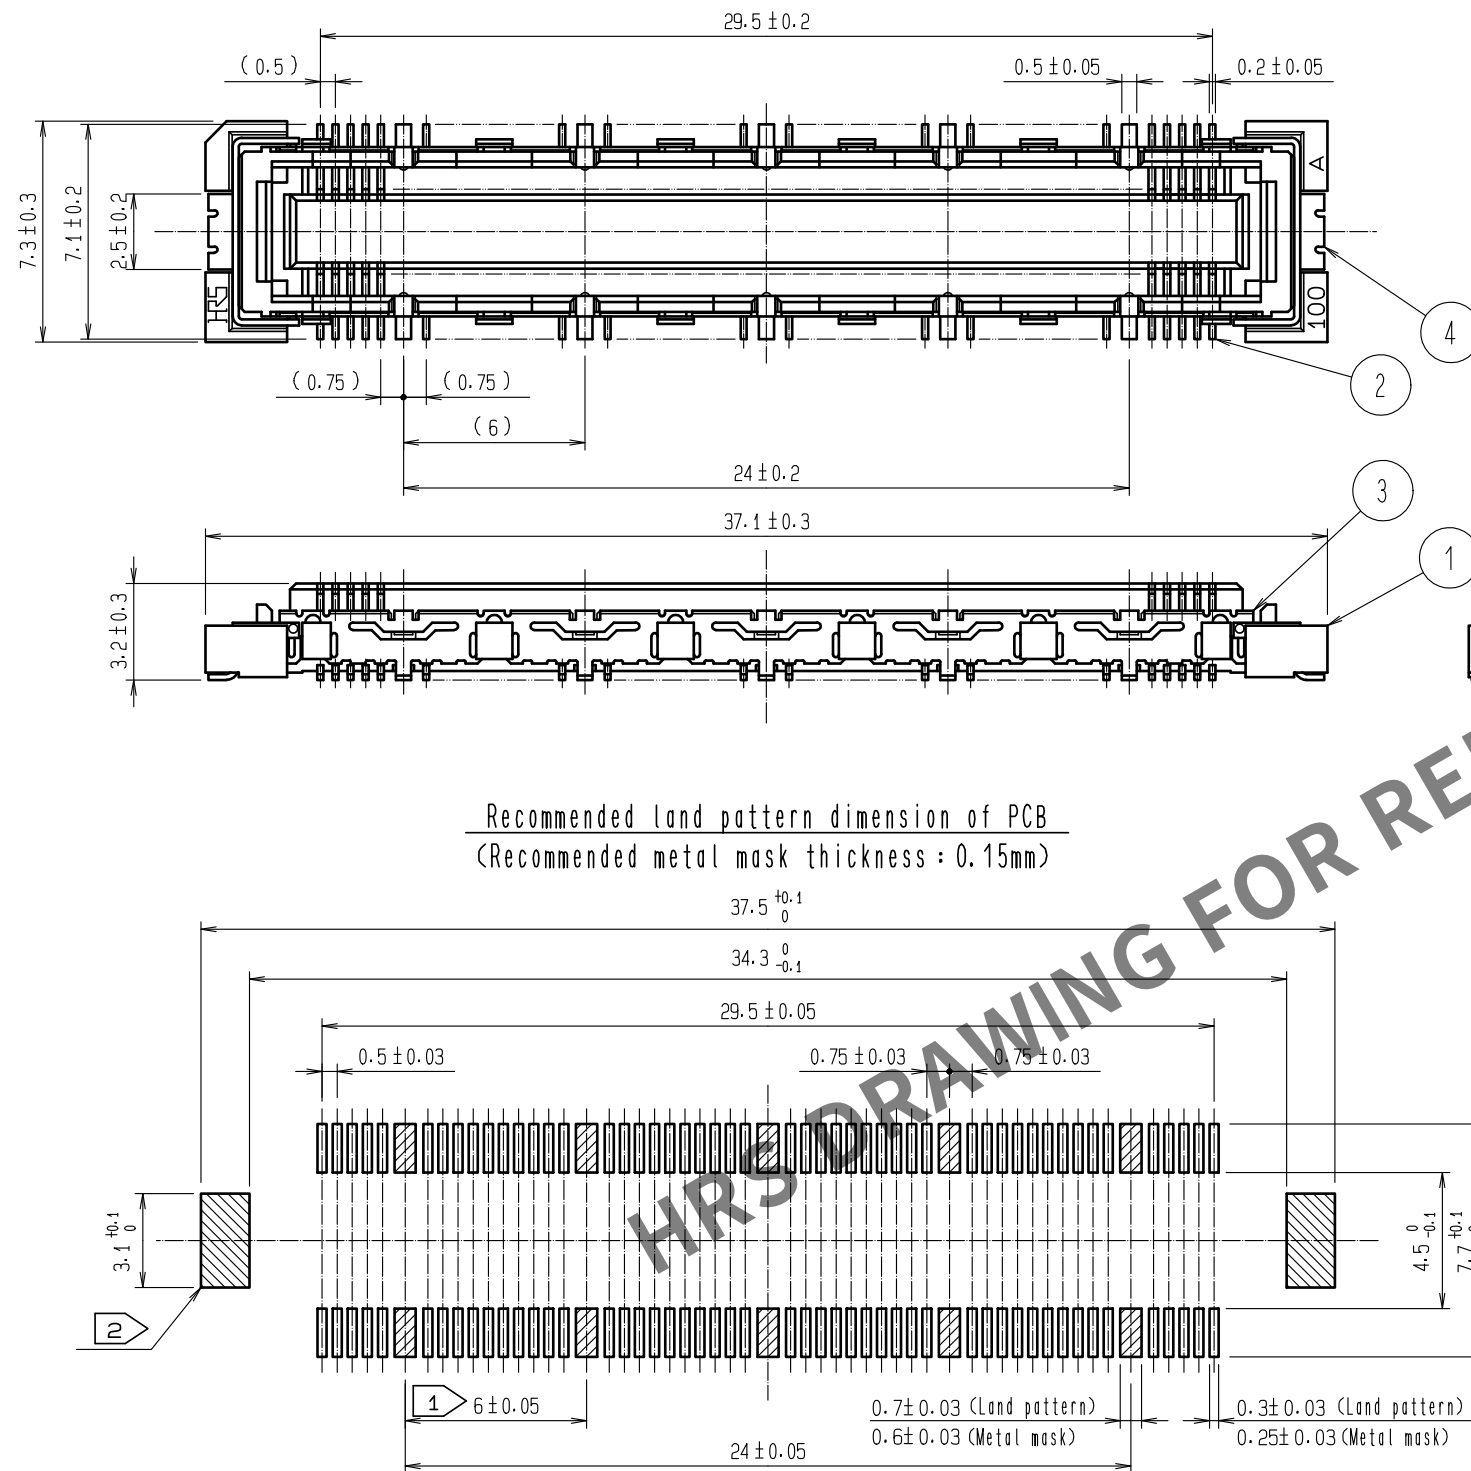

Cross cut section - signal (5:1)







Cross cut section - ground (5:1)



- Notes
- 1 10 hatched parts : ground circuit.
 - 2 2 hatched parts : ground circuit.
 - 3 SMT lead - coplanarity : 0.1 max.
 - 4 This product has no polarity to pattern for mounting.
 - 5 Emboss carrier tape package is applied on this product.
Please refer to the sheet 2/2 for the details.
 - 6 The dimensions in parentheses are for reference.

2	Phosphor blonze	Contact area : Gold 0.1 μ m min	6	Polyester	(Top cover tape)
		Lead area : Gold 0.05 μ m min	5	Polyethylene	(Emboss carrier tape)
		Under plating : Nickel 1 μ m min	4	Phosphor blonze	Tin - plating
1	LCP	Beige UL94V-0	3	Phosphor blonze	Tin - plating
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 4 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00011032	DESIGNED MT. ITANO
HIROSE ELECTRIC CO., LTD.		APPROVED : HT. YAMAGUCHI	20100729	DRAWING NO.	EDC3-151981-21
		CHECKED : HT. YAMAGUCHI	20100729	PART NO.	FX10B-100S/10-SV<91>
		DESIGNED : SY. KAMIGA	20100729	CODE NO.	CL0570-0222-4-91
		DRAWN : HK. SUNADORI	20100728		
					DATE 20211007

Drawing for packing (2:1)

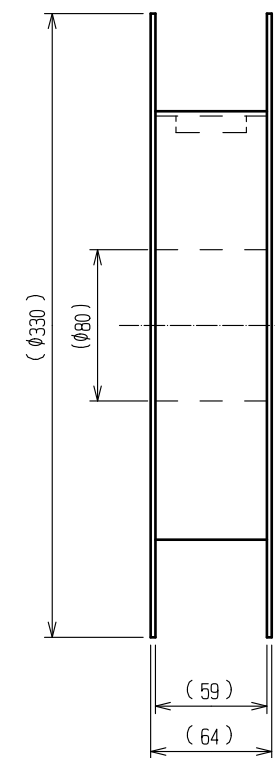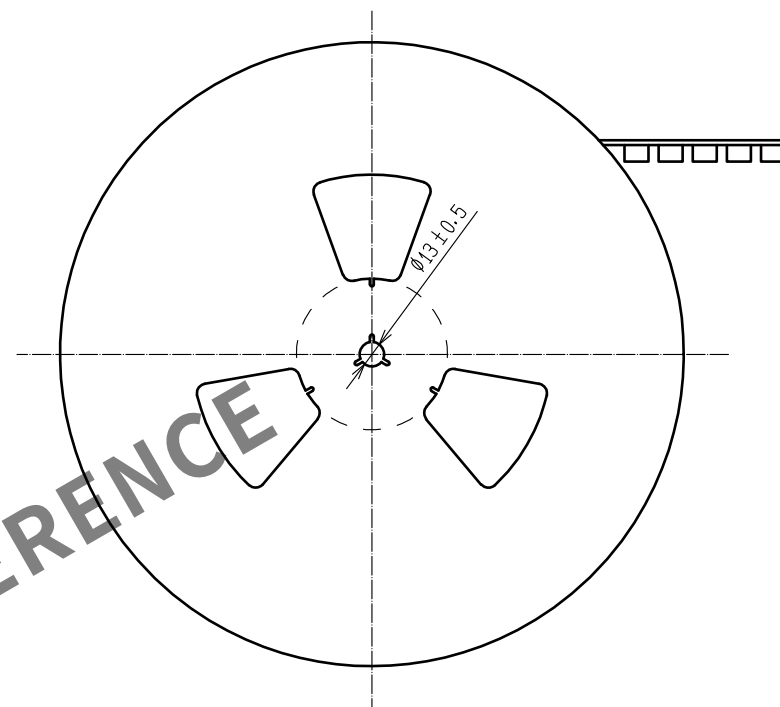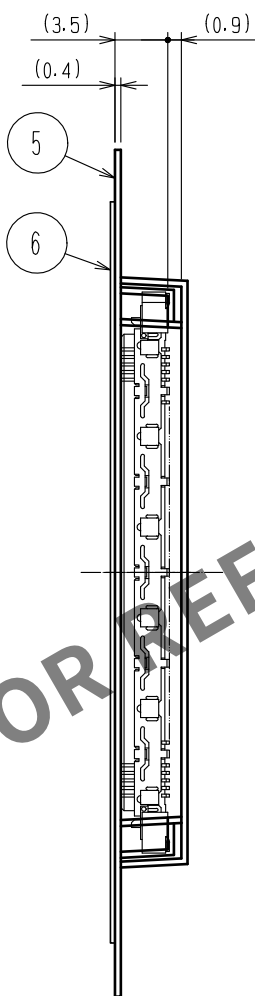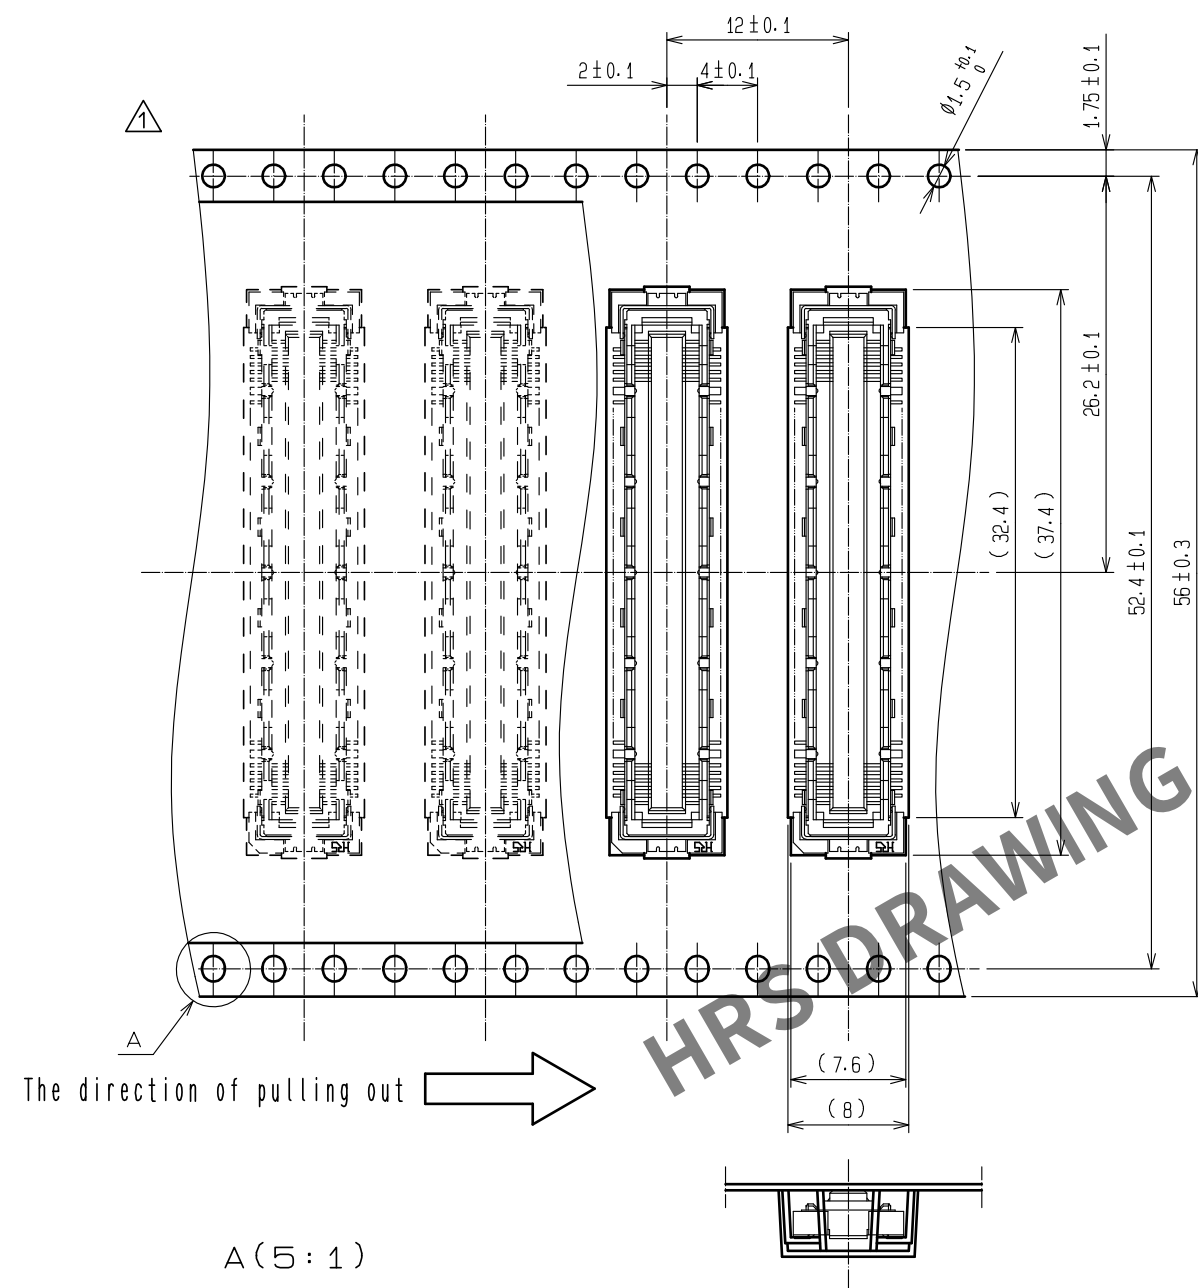

- Notes
- 7 1 reel : 1,000 connectors.
 - 8 Minimum 10 compartments from both reel ends remain empty.
 - 9 This product has no polavity to tape and reel packaging.
 - 10 The dimensions in parentheses are for reference.

HRS

DRAWING NO.	EDC3-151981-21
PART NO.	FX10B-100S/10-SV(91)
CODE NO.	CL0570-0222-4-91

1/2