
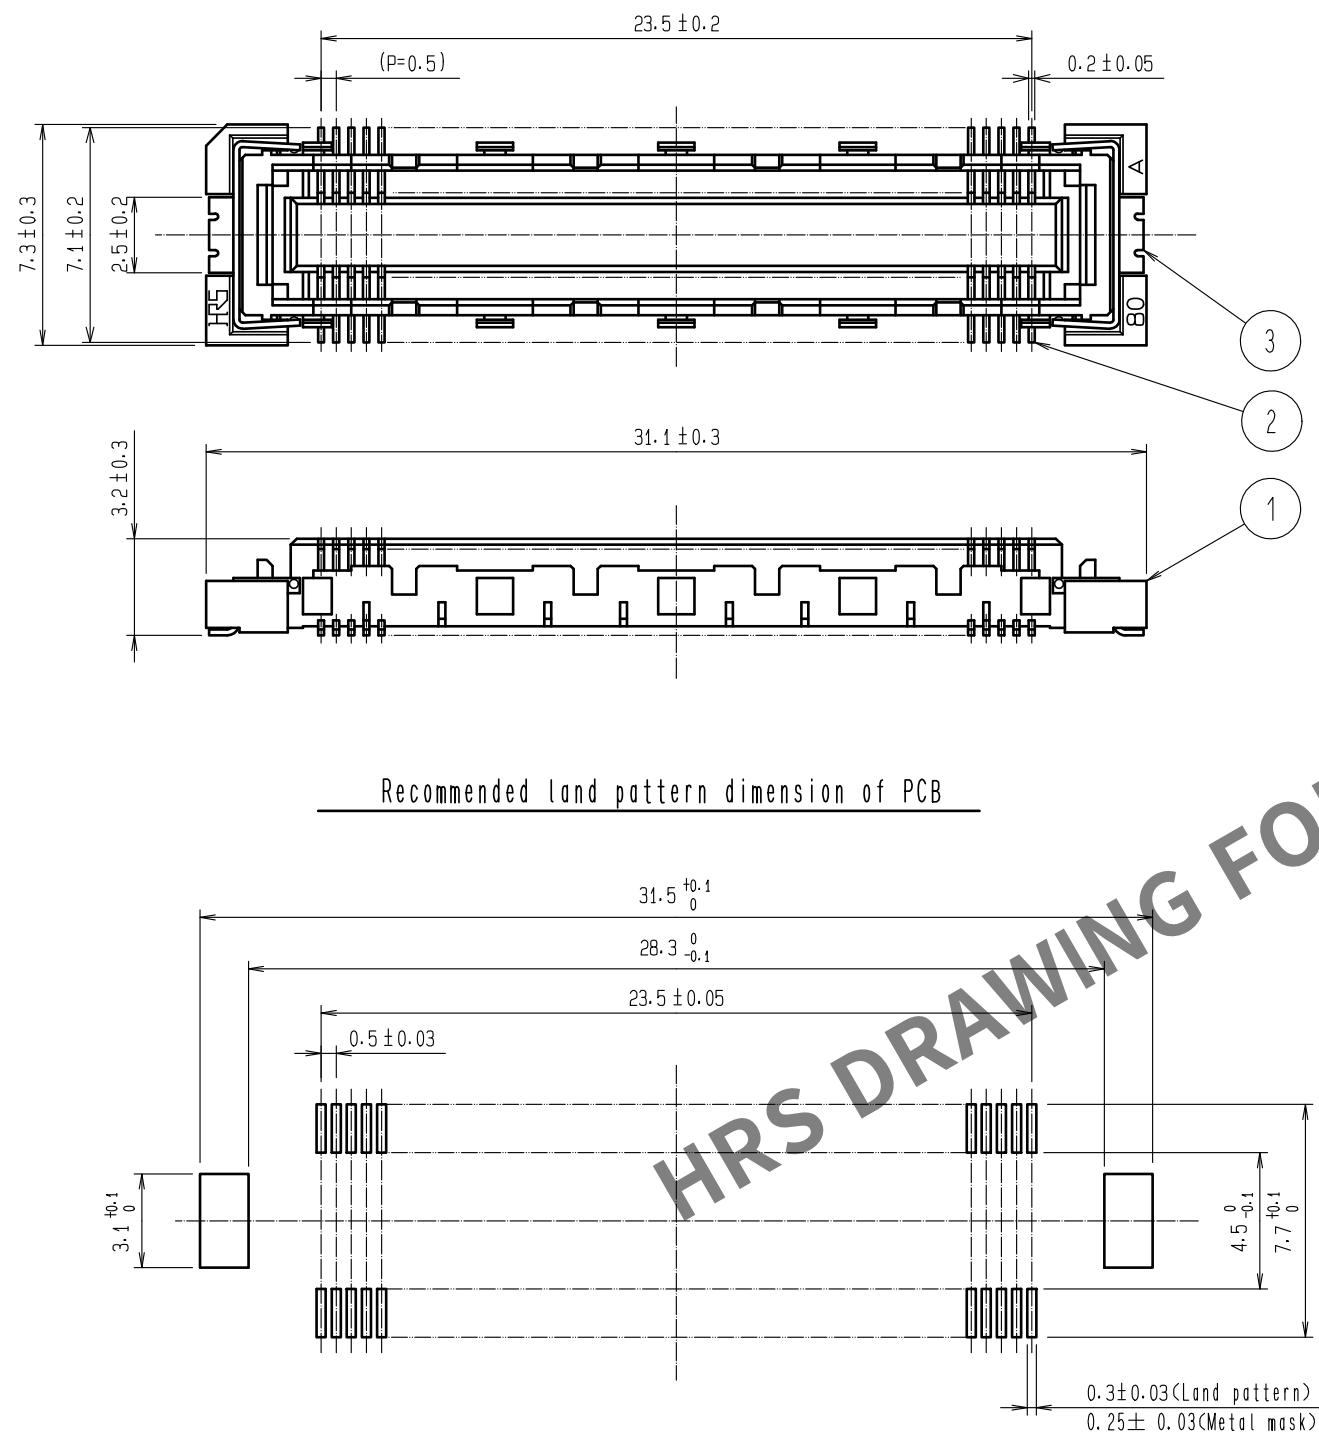


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes
- 1 SMT lead - coplanarity : 0.1 max.
 - 2 This product has no polarity to pattern for mounting.
 - 3 Emboss carrier tape package is applied on this product.
Please refer to the sheet 2/2 for the details.

2	Phosphor blonze	Contact area : Gold 0.1 μm min			5	Polyester	(Top cover tape)
		Lead : Gold 0.05 μm min					
		Under plating : Nickel 1 μm min					
1	LCP	Beige UL94V-0			3	Phosphor blonze	Tin - plating
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS


UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		4 : 1		1	DIS-F-00011032	MT. ITANO	HT. YAMAGUCHI	20211007

 HIROSE ELECTRIC CO., LTD.	APPROVED	: KJ. KATAYOSE	20050105	DRAWING NO.	EDC3-151988-01		
	CHECKED	: HS. OKAWA	20050105	PART NO.	FX10B-96S-SV(21)		
	DESIGNED	: KT. DOI	20050105	CODE NO.	CL0570-0251-2-21		
	DRAWN	: KT. DOI	20050105				

	
---	---

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Drawing for packing (2:1)

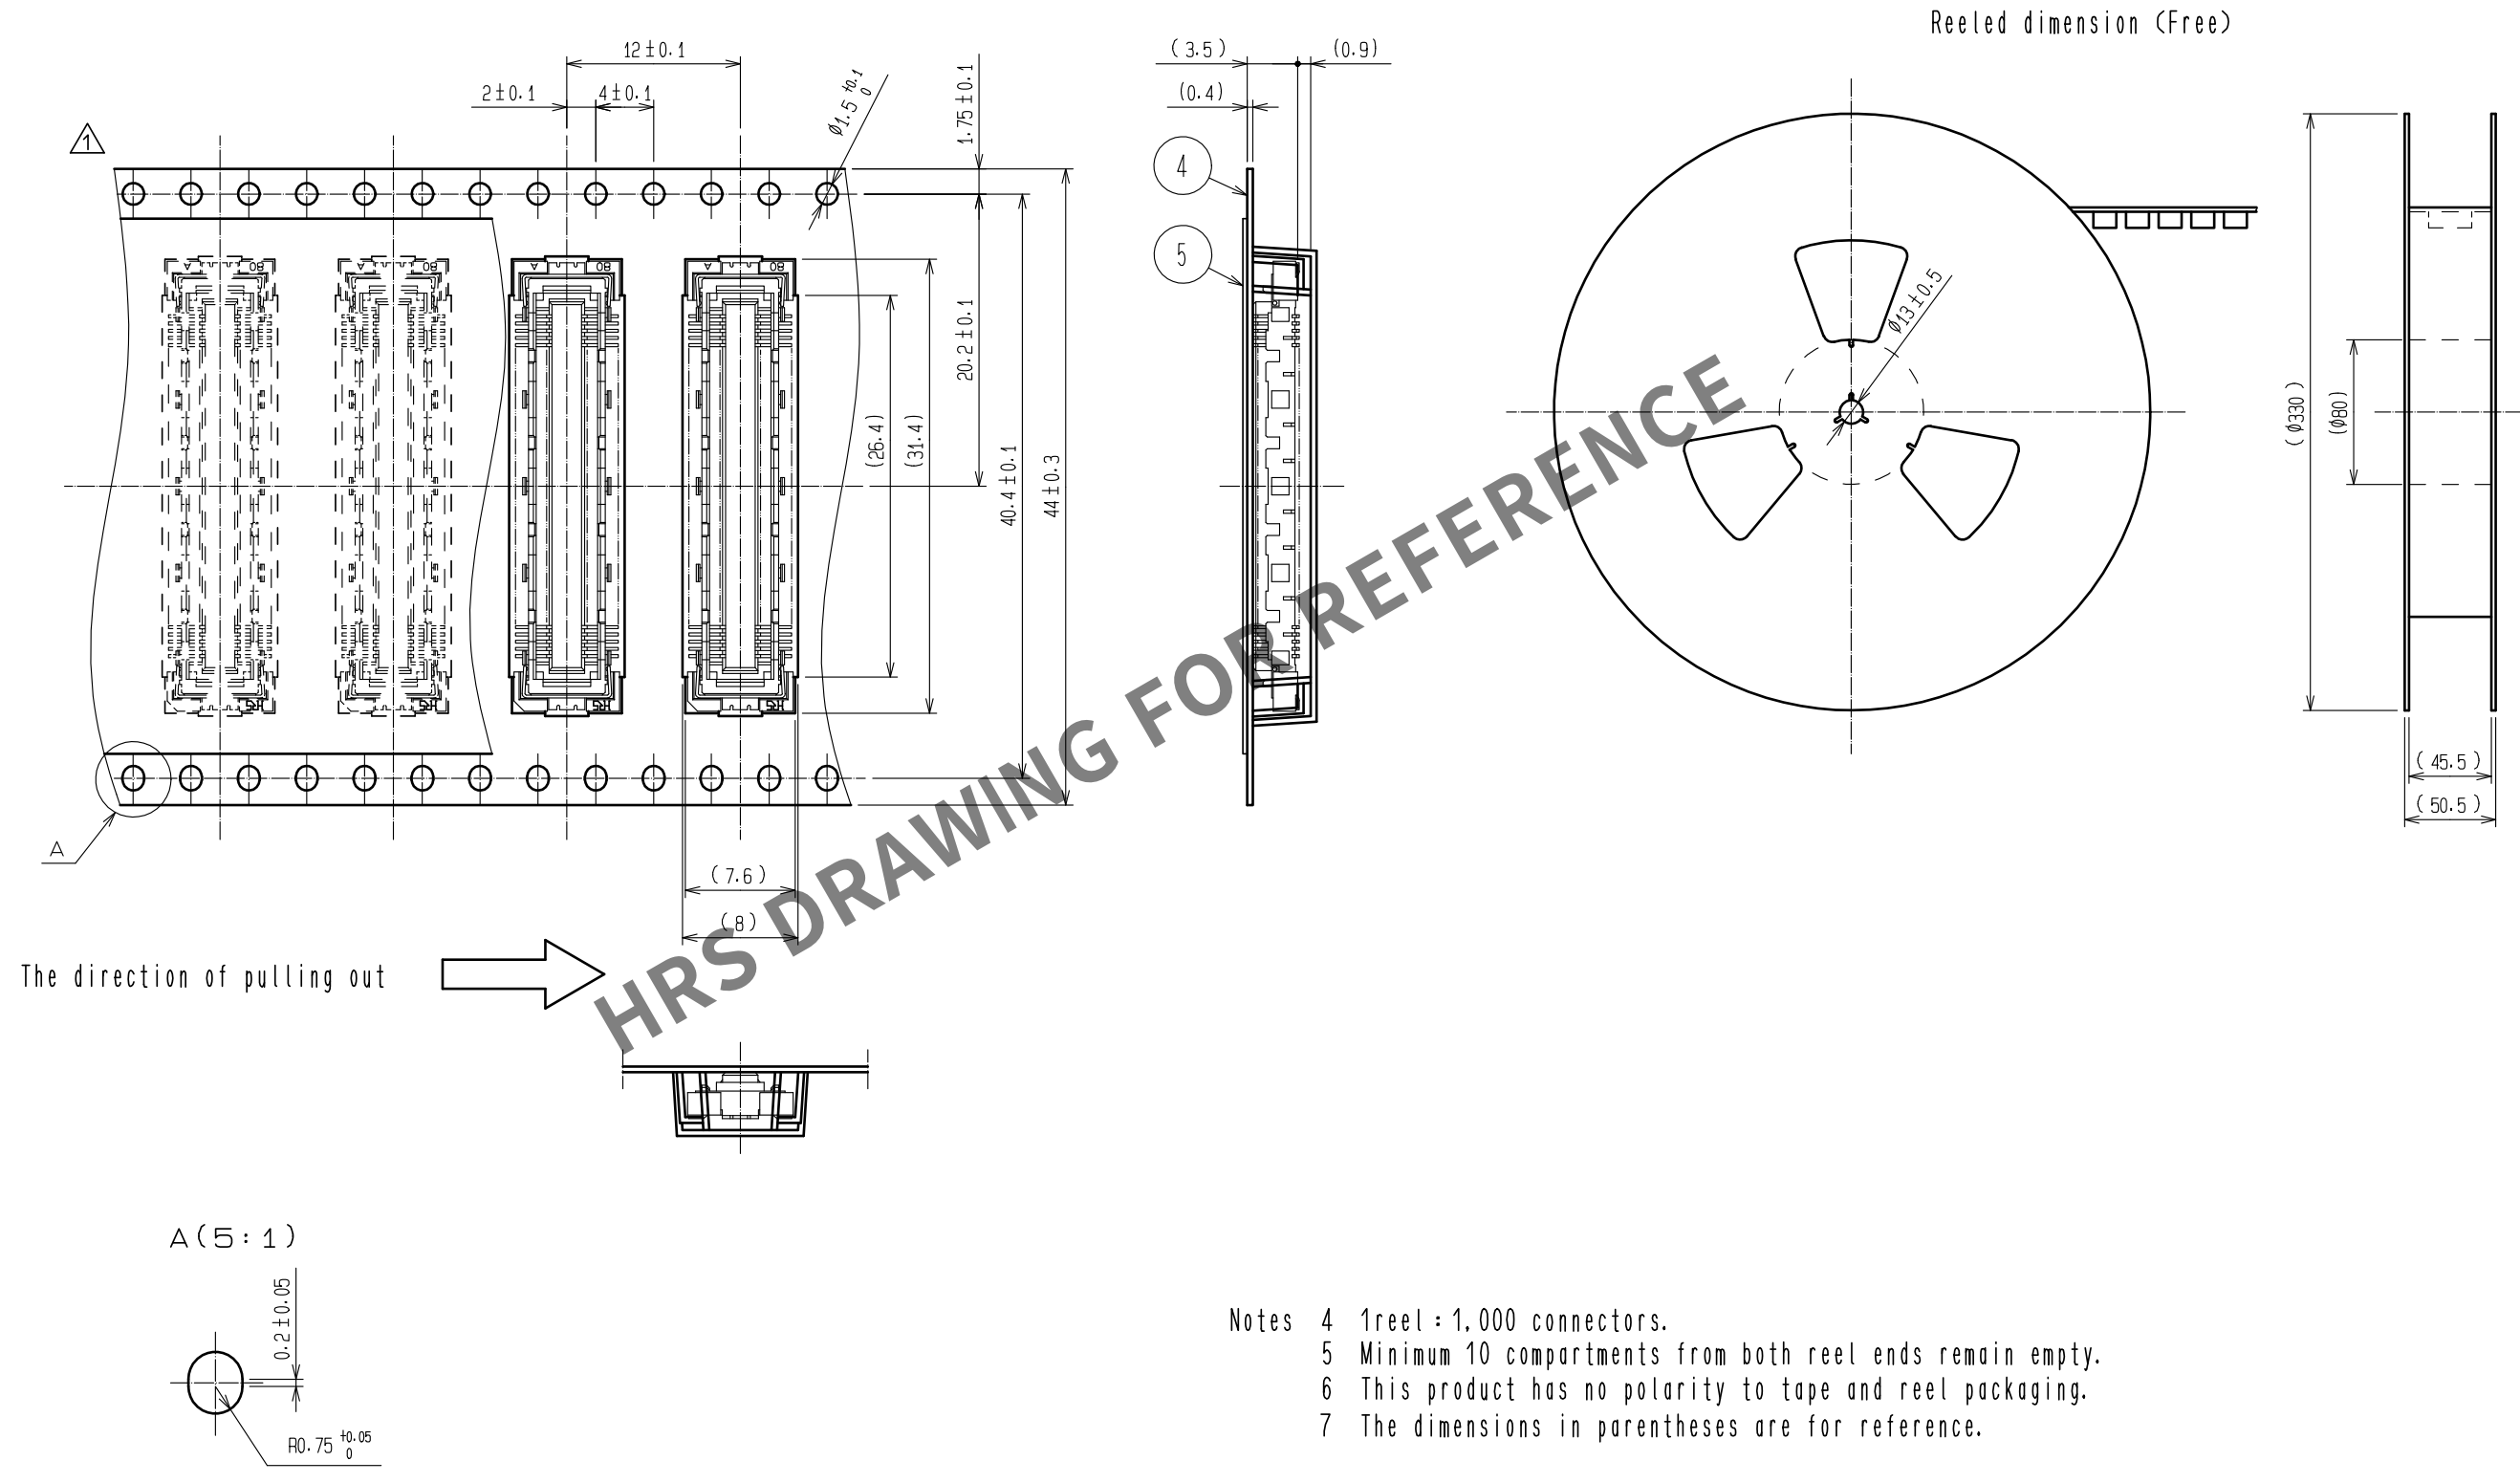

- Notes
- 4 1reel : 1,000 connectors.
 - 5 Minimum 10 compartments from both reel ends remain empty.
 - 6 This product has no polarity to tape and reel packaging.
 - 7 The dimensions in parentheses are for reference.

HRS	DRAWING NO.	EDC3-151988-01
	PART NO.	FX10B-96S-SV(21)
	CODE NO.	CL0570-0251-2-21

1

2

2