



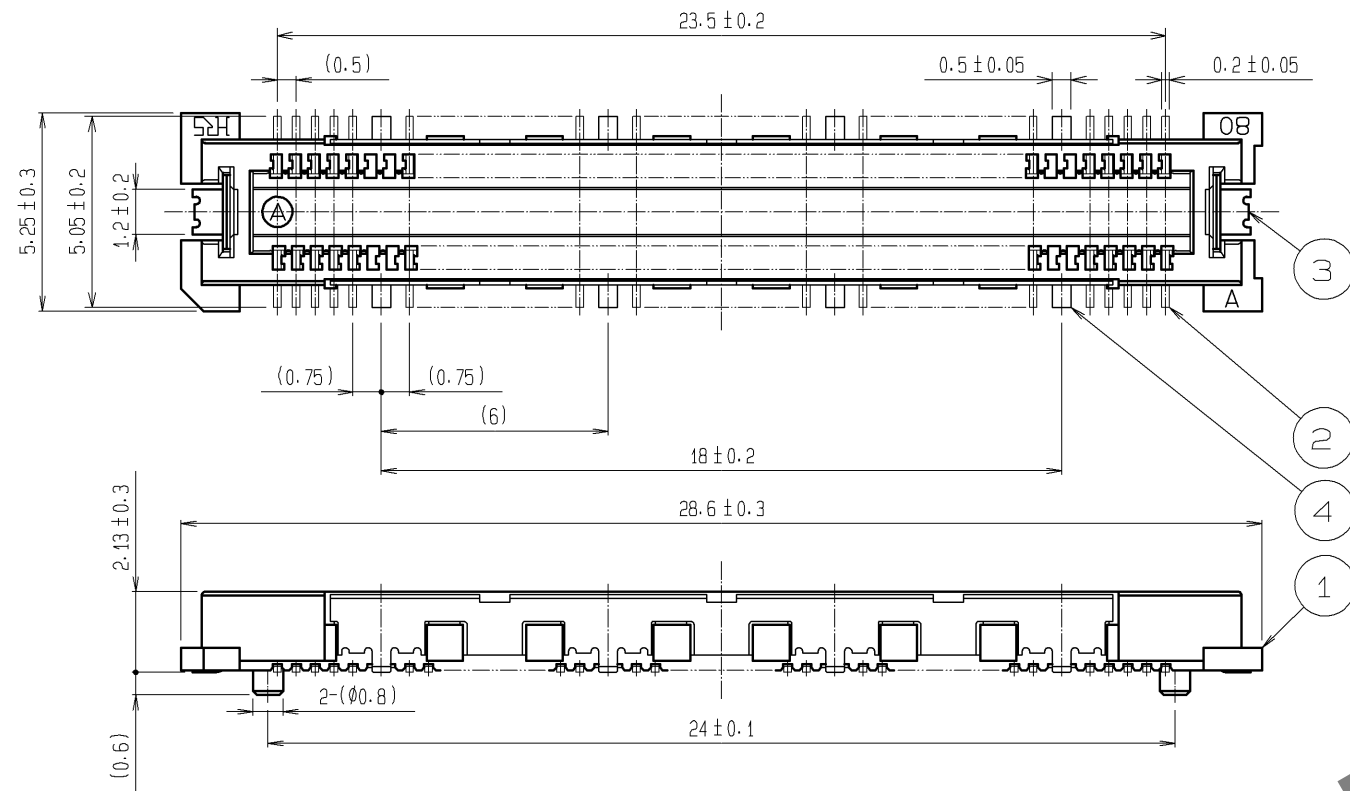


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

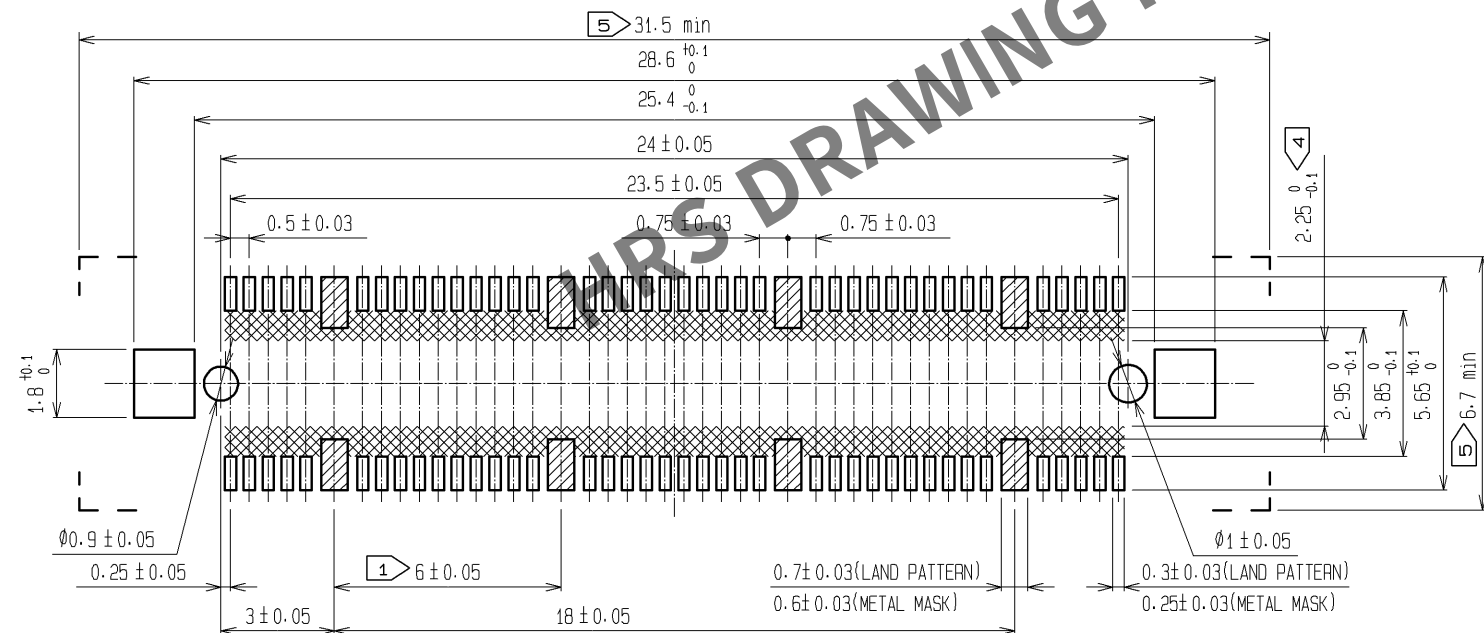



- NOTES
- 8 HATCHED  PARTS: GROUND CIRCUIT.
 - SMT LEAD-COPLANARITY: 0.1 MAX.
 - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED  AREA.)
 - DO NOT MOUNT OTHER DEVICES ONTO  AREA, OR MATING PAIR CANNOT BE MATED.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

SIGNAL PORTION CROSS SECTION(10:1)

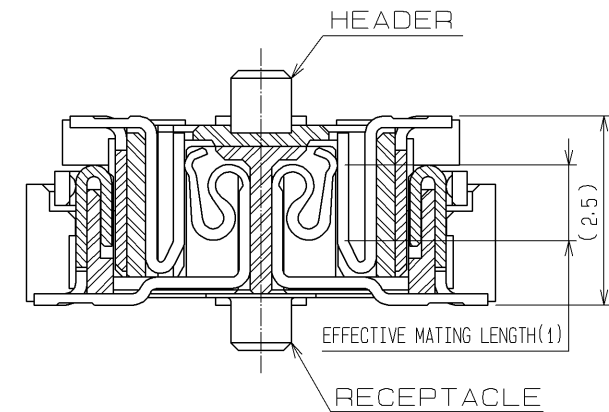

GROUND PORTION CROSS SECTION(10:1)

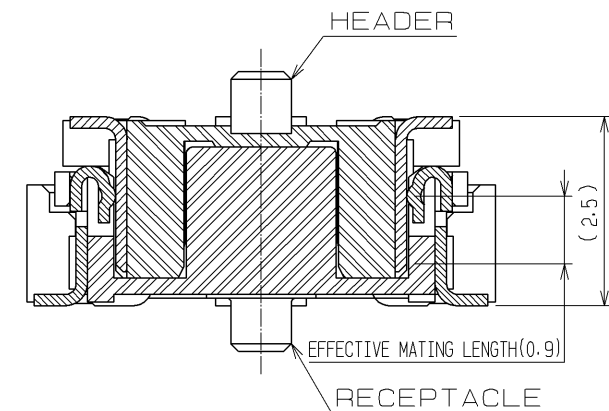

3, 4		PHOSPHOR BRONZE	TIN PLATING		2	COPPER ALLOY	CONTACT AREA : GOLD 0.1μm min.					
1		LCP	BEIGE UL94V-0				LEAD AREA : GOLD 0.05μm min.					
				UNDER PLATING : NICKEL 1μm min.								
NO.		MATERIAL		FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS				
UNITS				SCALE		COUNT		DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm				5 : 1								
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		11.03.26		DRAWING NO.		EDC3-152598-25				
		CHECKED : HT. YAMAGUCHI		11.03.26		PART NO.		FX11A-80P/8-SV(71)				
		DESIGNED : SY. KAMIGA		11.03.26		CODE NO.		CL573-0503-2-71				
		DRAWN : HK. SUNADORI		11.03.26				 1/1				