

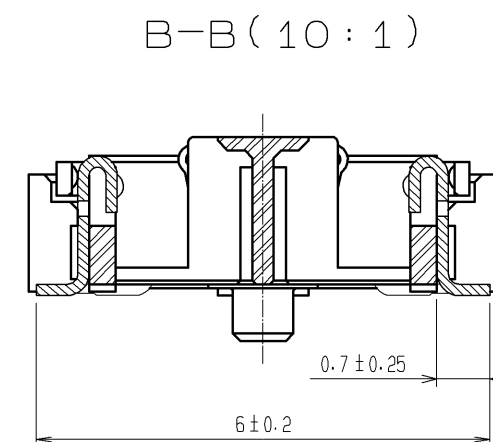
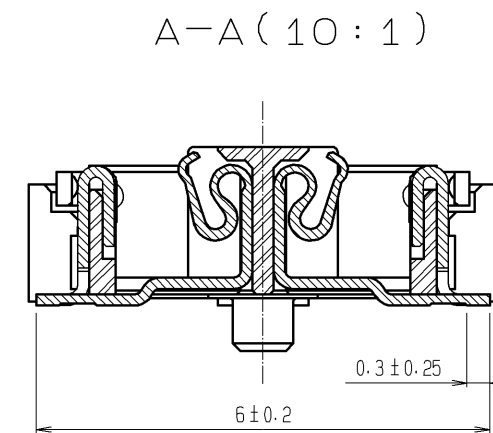



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

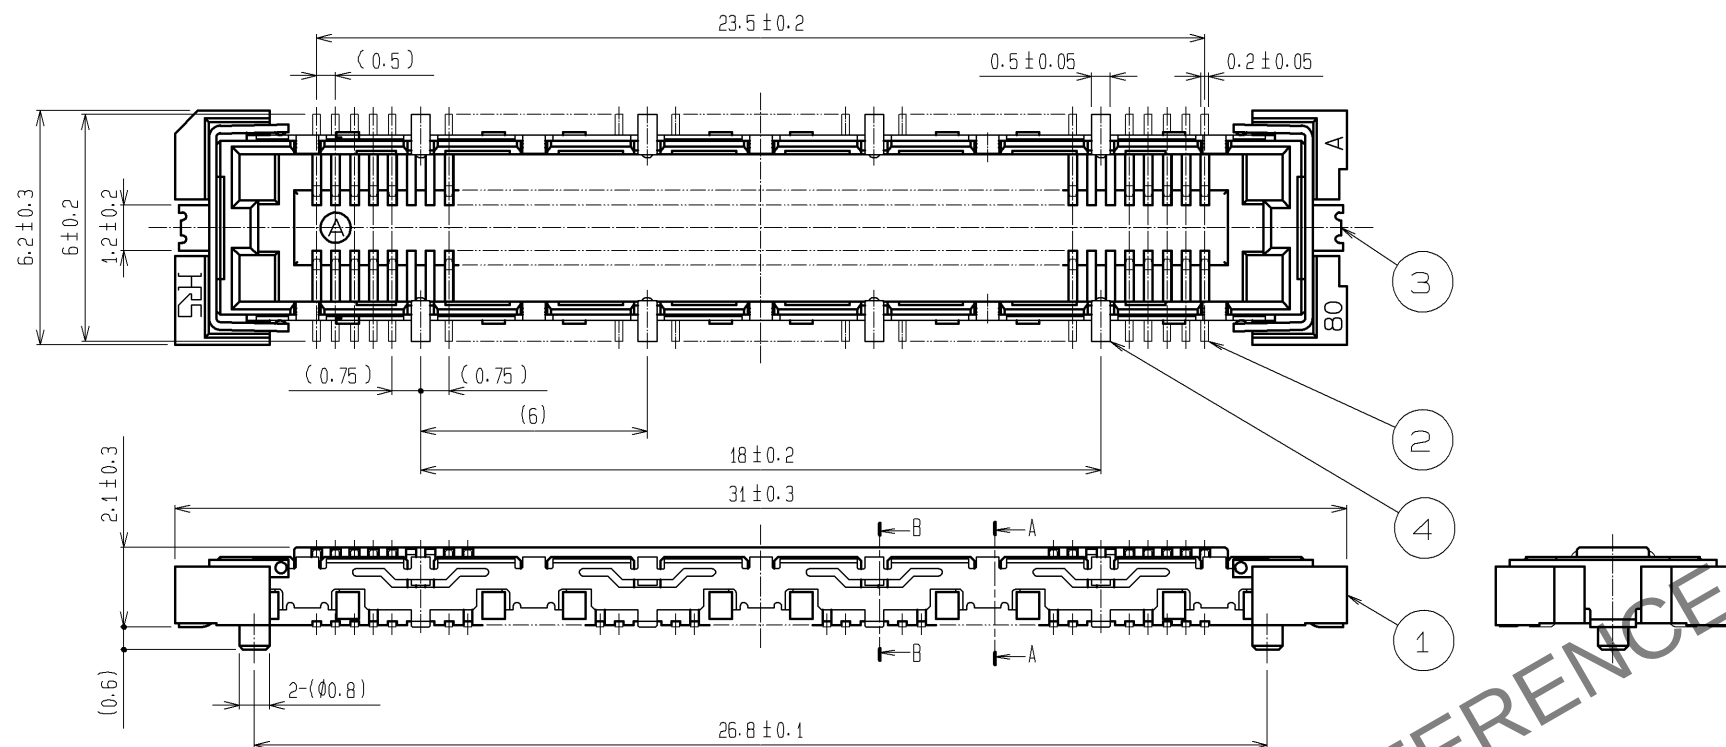

RECOMMENDED LAND PATTERN DIMENSION OF PCB  
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

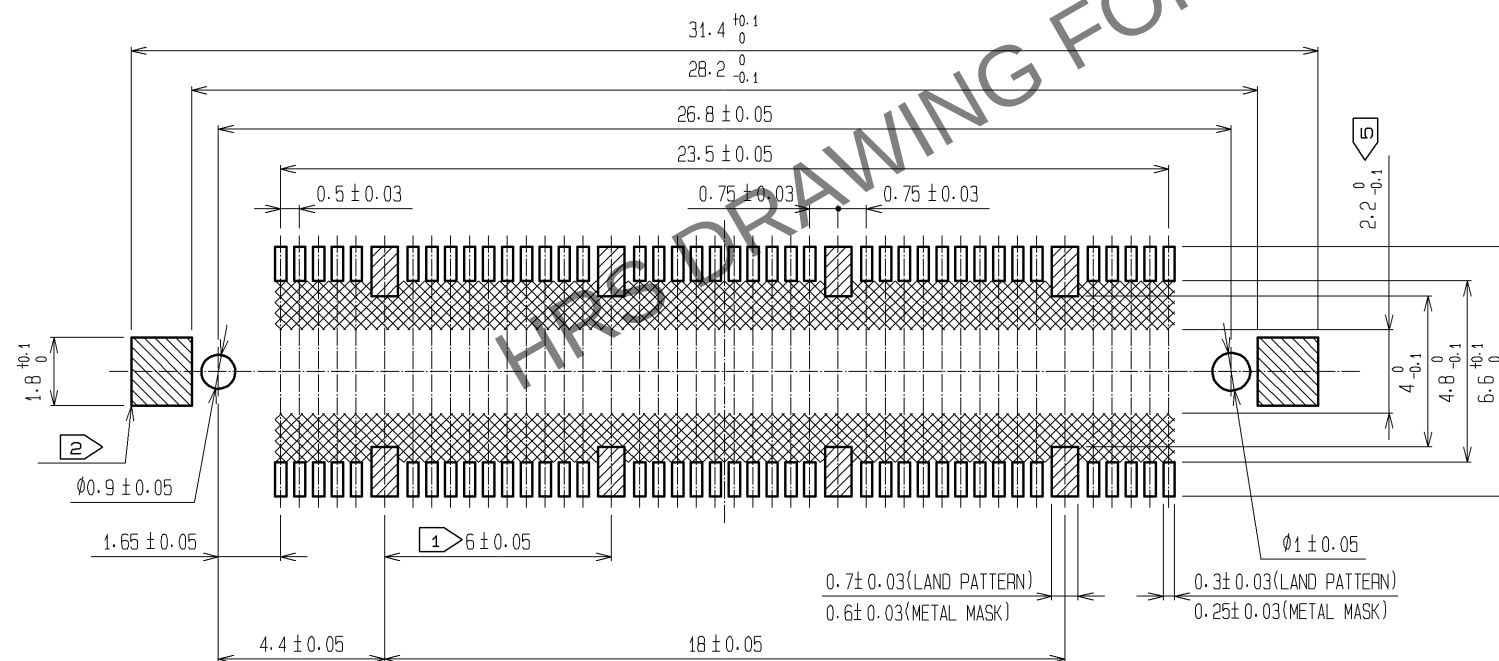

- NOTES
- 8 HATCHED PARTS: GROUND CIRCUIT.
  - 2 HATCHED PARTS: GROUND CIRCUIT.
  - SMT LEAD-COPLANARITY: 0.1 MAX.
  - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND .OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

|                                                                                                                 |  |                                                                                       |               |                  |   |                                                                                       |                                 |                          |                  |          |         |      |
|-----------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|---------------|------------------|---|---------------------------------------------------------------------------------------|---------------------------------|--------------------------|------------------|----------|---------|------|
| 3, 4                                                                                                            |  | PHOSPHOR BRONZE                                                                       | TIN PLATING   |                  | 2 | PHOSPHOR BRONZE                                                                       | CONTACT AREA : GOLD 0.1μm min.  |                          |                  |          |         |      |
| 1                                                                                                               |  | LCP                                                                                   | BEIGE UL94V-0 |                  |   |                                                                                       | LEAD AREA : GOLD 0.05μm min.    |                          |                  |          |         |      |
|                                                                                                                 |  |                                                                                       |               |                  |   |                                                                                       | UNDER PLATING : NICKEL 1μm min. |                          |                  |          |         |      |
| NO.                                                                                                             |  | MATERIAL                                                                              |               | FINISH , REMARKS |   | NO.                                                                                   | MATERIAL                        |                          | FINISH , REMARKS |          |         |      |
| UNITS<br>mm                                                                                                     |  |  |               | SCALE<br>5 : 1   |   |  | COUNT                           | DESCRIPTION OF REVISIONS |                  | DESIGNED | CHECKED | DATE |
|  HIROSE ELECTRIC CO., LTD. |  | APPROVED : HS. OKAWA                                                                  |               | 11.03.26         |   | DRAWING NO.                                                                           |                                 | EDC3-152633-25           |                  |          |         |      |
|                                                                                                                 |  | CHECED : HT. YAMAGUCHI                                                                |               | 11.03.26         |   | PART NO.                                                                              |                                 | FX11A-80S/8-SV(71)       |                  |          |         |      |
|                                                                                                                 |  | DESIGNED : SY. KAMIGA                                                                 |               | 11.03.26         |   | CODE NO.                                                                              |                                 | CL573-0703-1-71          |                  |          |         |      |
|                                                                                                                 |  | DRAWN : HK. SUNADORI                                                                  |               | 11.03.26         |   |                                                                                       |                                 |                          |                  |          |         |      |
|                                                                                                                 |  |                                                                                       |               |                  |   |                                                                                       |                                 |                          |                  |          |         |      |