

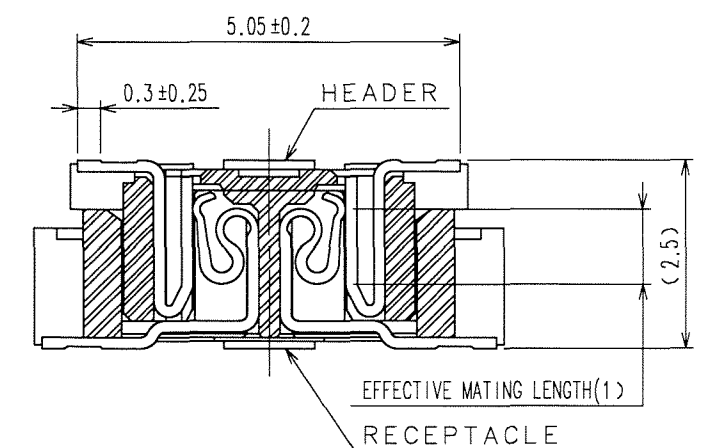



	COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

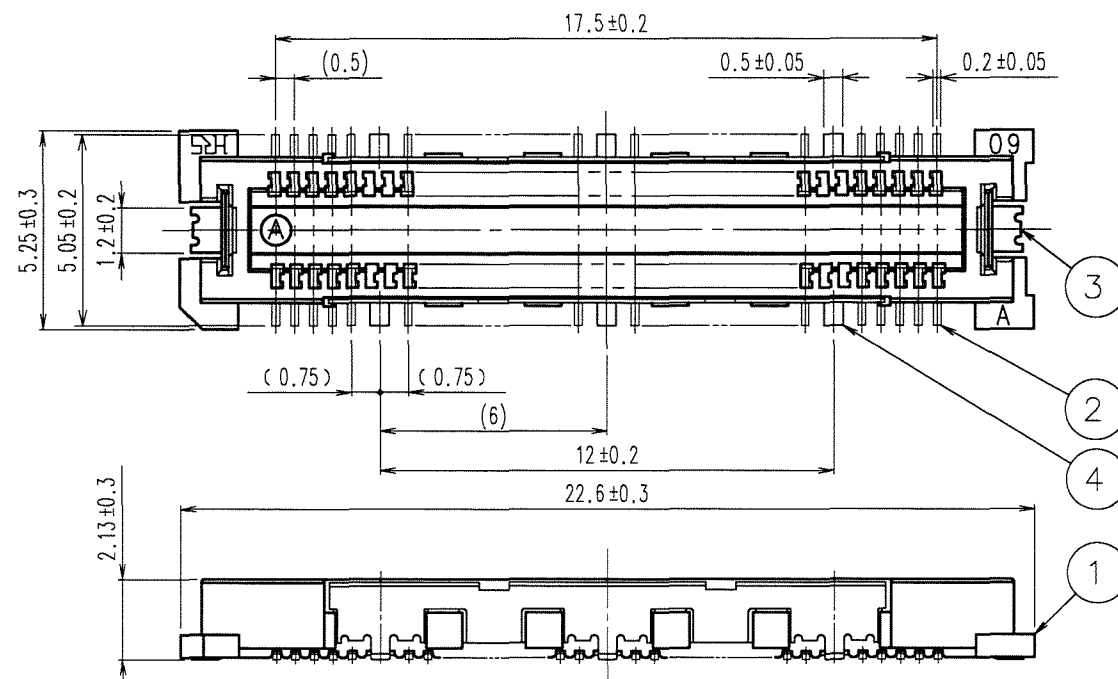

RECOMMENDED LAND PATTERN DIMENSION OF PCB

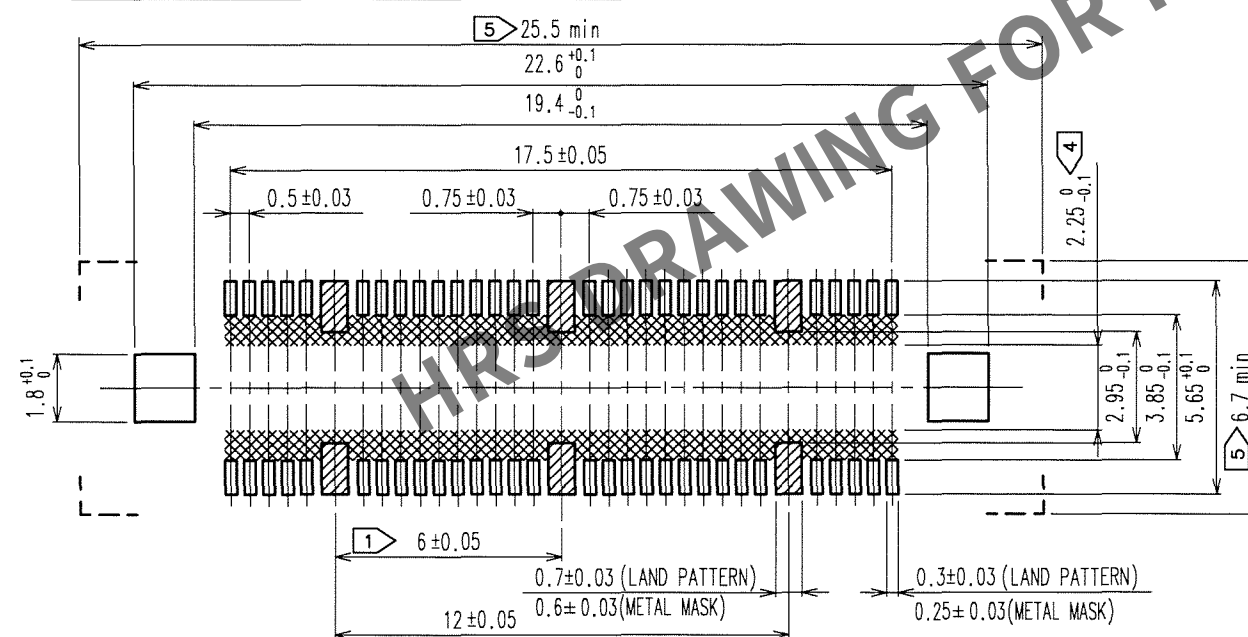

GROUND PORTION CROSS SECTION (10 : 1)

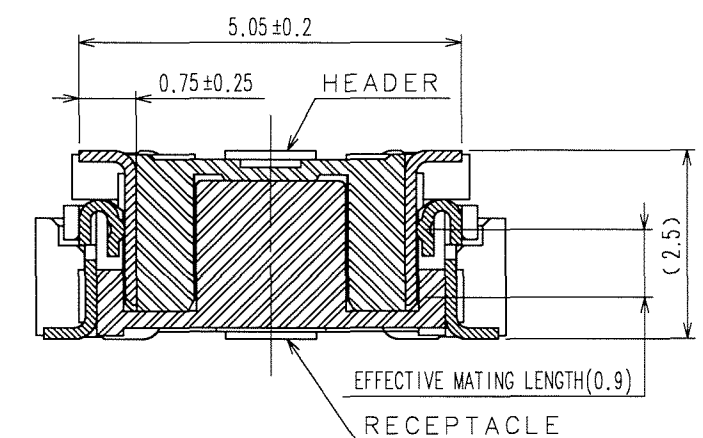

- NOTES
- 1 6 HATCHED  PARTS:GROUND CIRCUIT.
 - 2 SMT LEAD-COPLANARITY:0.1 MAX.
 - 3 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 4 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
 - 5 DO NOT MOUNT OTHER DEVICES ONTO   AREA ,OR MATING PAIR CANNOT BE MATED.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4	PHOSPHOR BRONZE	TIN-PLATING	2	COPPER ALLOY	LEAD AREA:GOLD FLASH	
1	LCP	BEIGE UL94V-0			UNDER PLATING:NICKEL 1 μm min.	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED
			S.KAMIGA	H. Nakamura	H. Ogawa	H. Okawa
			06.05.13	06.05.13	06.05.13	06.05.13
DRAWING NO. EDC3-152601-25			PART NO. FX11B-60P/6-SV(71)			
 HIROSE ELECTRIC CO.,LTD.			CODE NO. CL573-0512-3-71			1/1