
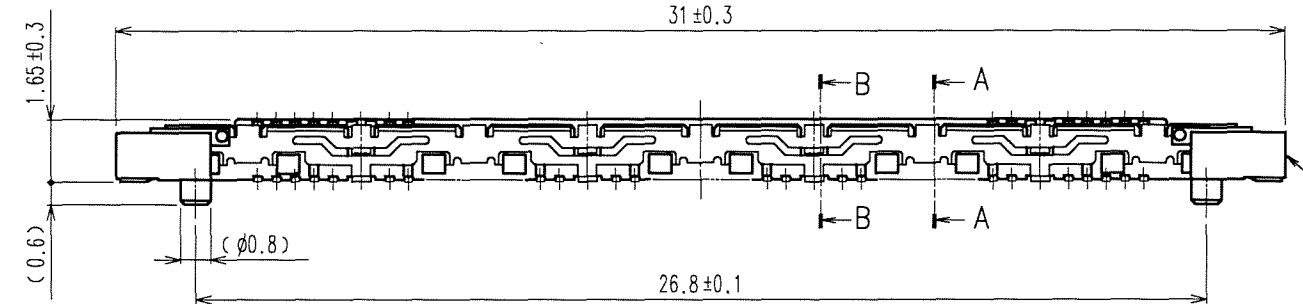


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


TO
CK

1 2 3 4 5 6 7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				.	△				.
△				.	△				.
△				.	△				.

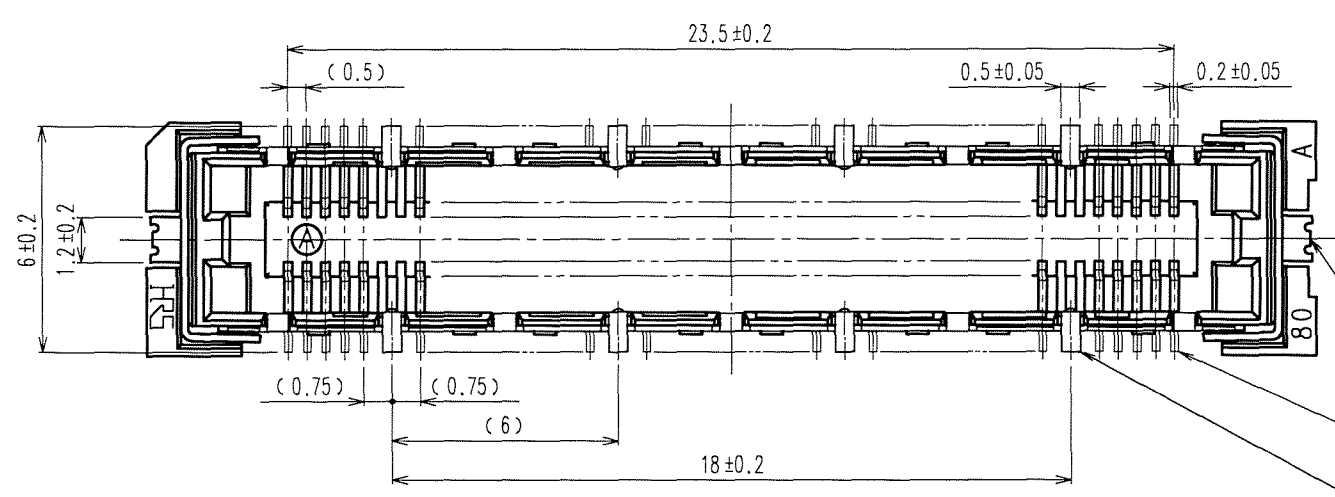


RECOMMENDED LAND PATTERN DIMENSION OF PCB

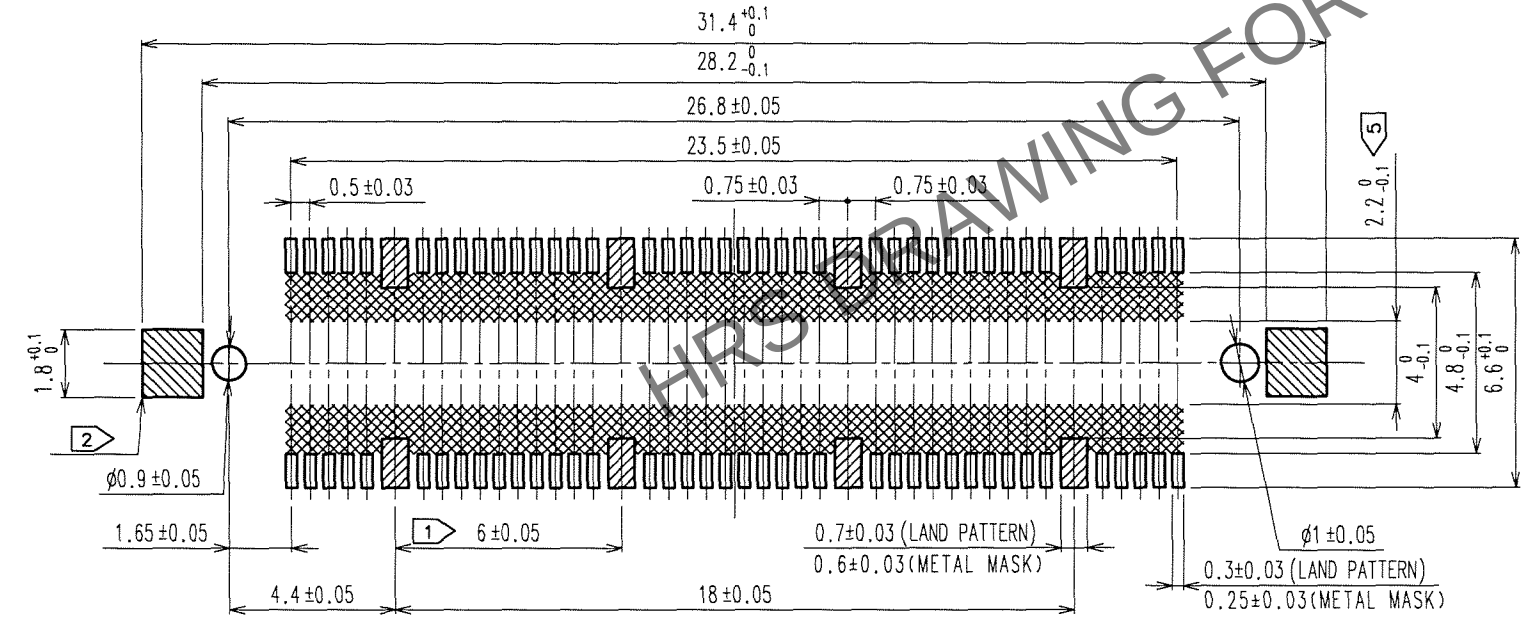



- NOTES ① 8 HATCHED PARTS: GROUND CIRCUIT.
② 2 HATCHED PARTS: GROUND CIRCUIT.
③ SMT LEAD-COPLANARITY: 0.1 MAX.
④ THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
⑤ MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
⑥ THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

A-A (10:1)

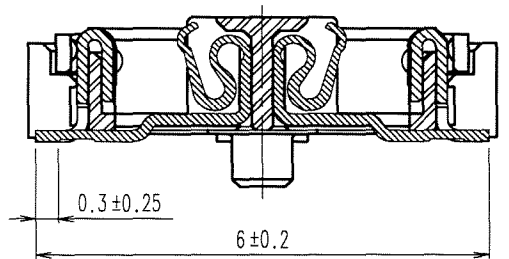

B-B (10:1)

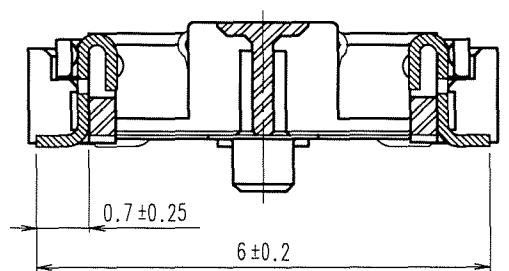

4	PHOSPHOR BRONZE	TIN-PLATING	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min.		
3	PHOSPHOR BRONZE	TIN-PLATING			LEAD AREA: GOLD FLASH		
1	LCP	BEIGE UL94V-0			UNDER PLATING: NICKEL 1μm min.		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			K.NAKAMURA 06.04.25	K.NAKAMURA 06.04.25	X.C. Ogawa 06.04.25	H. Kawa 06.04.26	
		DRAWING NO. EDC3-152109-25		PART NO. FX11LA-80S/8-SV(71)			
SCALE 5 : 1		 HIROSE ELECTRIC CO.,LTD.		CODE NO. CL573-0103-4-71			1/1
UNITS mm							