




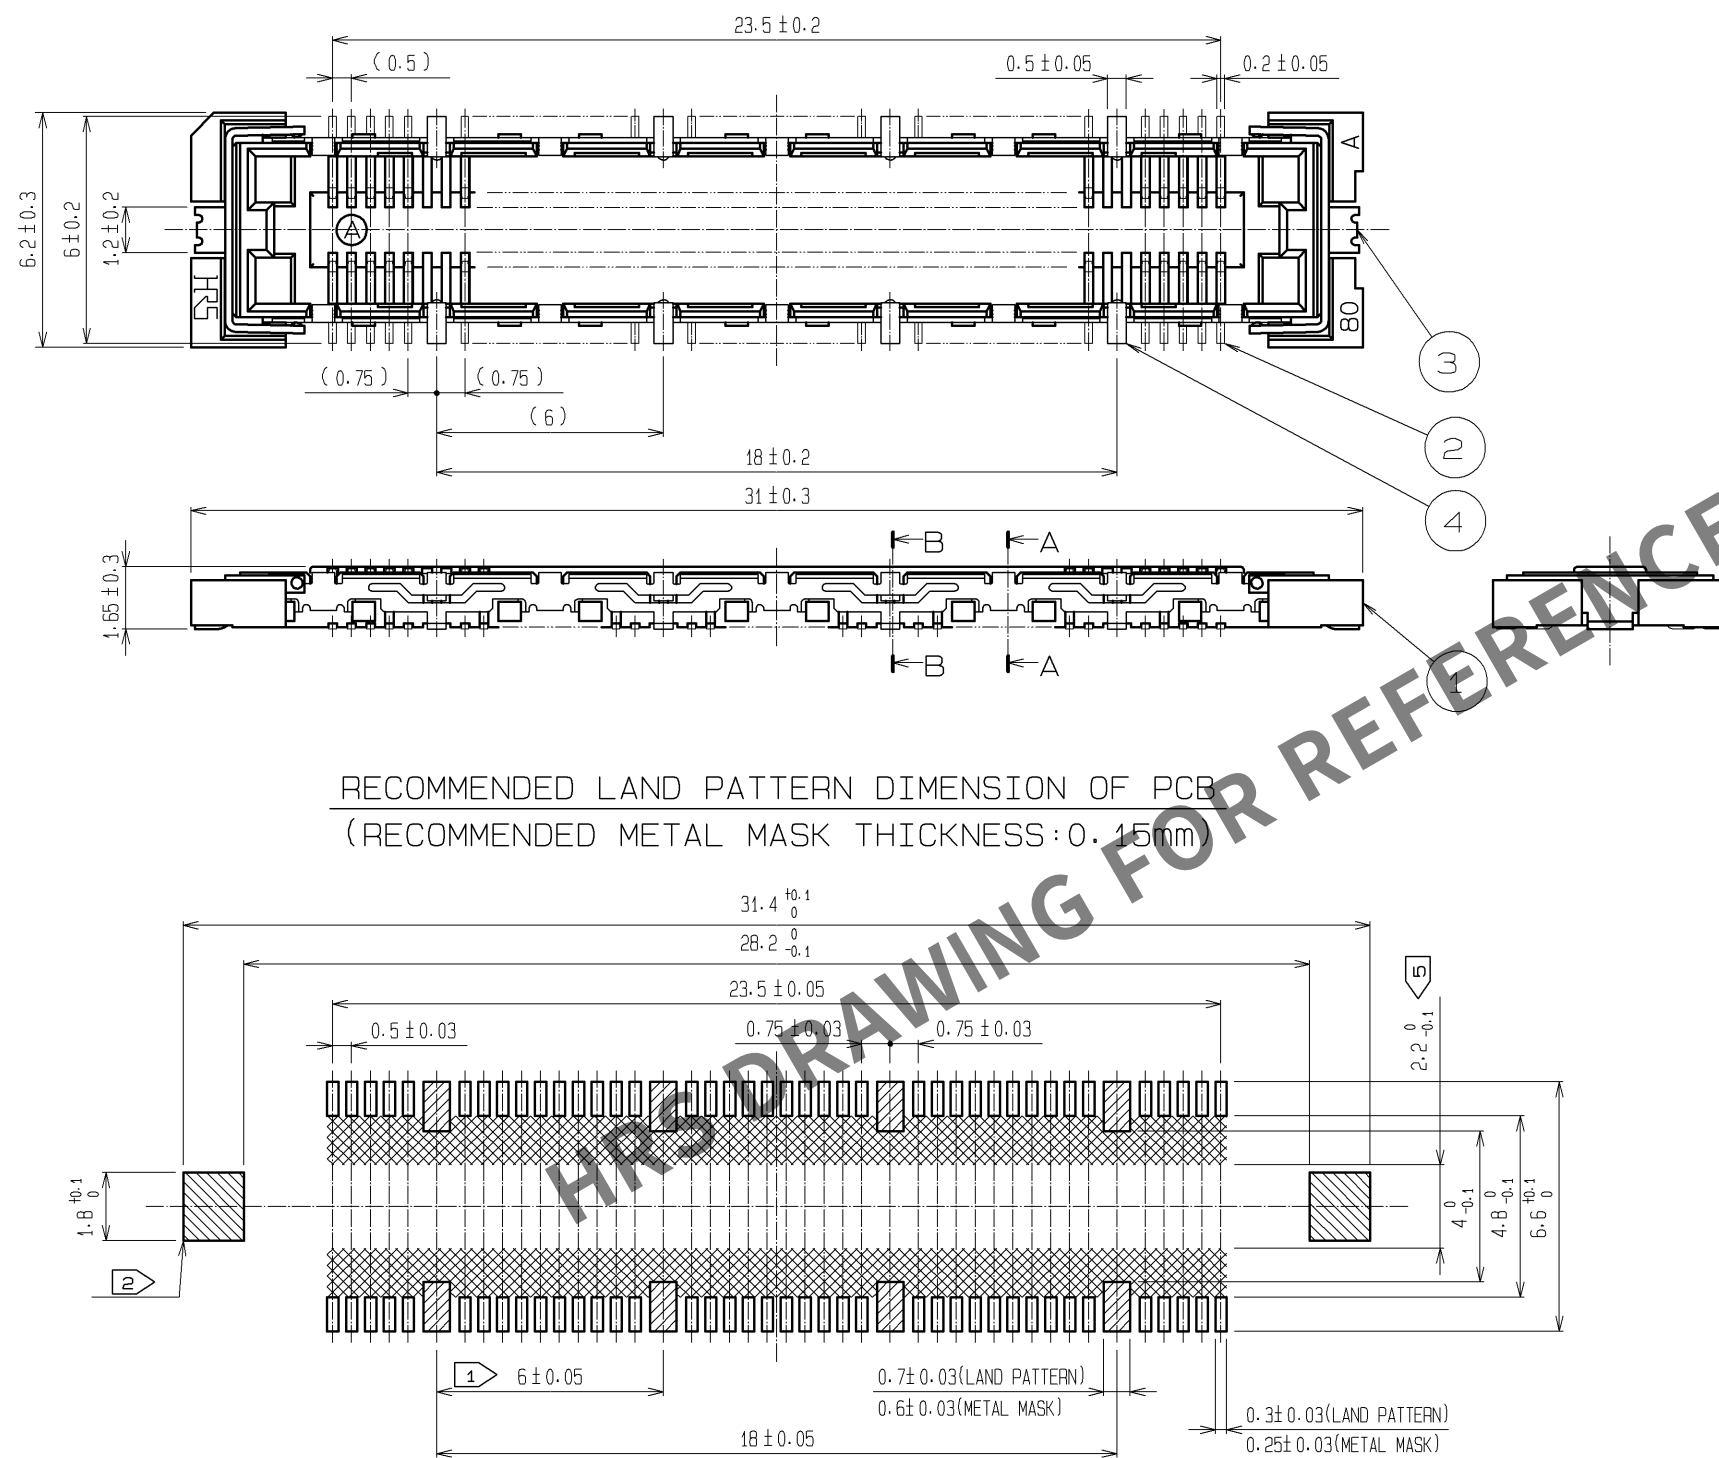

A-A (10 : 1)

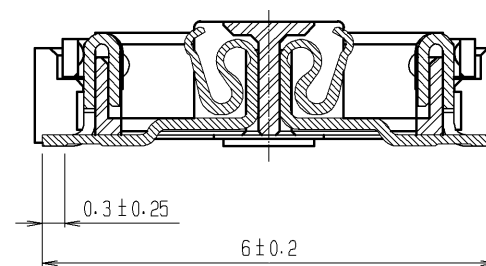



B-B (10 : 1)

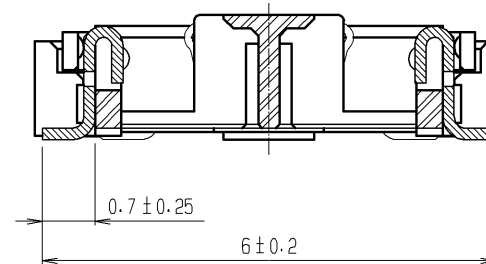


- NOTES
- 1 8 HATCHED PARTS: GROUND CIRCUIT.
 - 2 2 HATCHED PARTS: GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND . OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 6 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.
 - 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

3, 4	PHOSPHOR BRONZE	TIN PLATING				
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min.		7	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
		LEAD AREA : GOLD 0.05μm min.				
		UNDER PLATING : NICKEL 1μm min.				
1	LCP	BEIGE UL94V-0		5	PS	EMBOSSED CARRIER TAPE
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS


UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		09.06.30	DRAWING NO.	EDC3-152113-22		
		CHECED : HT. YAMAGUCHI		09.06.30	PART NO.	FX11LB-80S/8-SV(92)		
		DESIGNED : YN. TAKANO		09.06.30	CODE NO.	CL573-0113-8-92		
		DRAWN : HK. SUNADORI		09.06.29				 1/

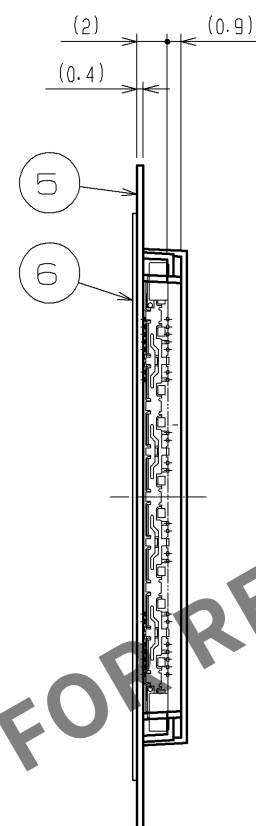


REELED DIMENSION(Free)

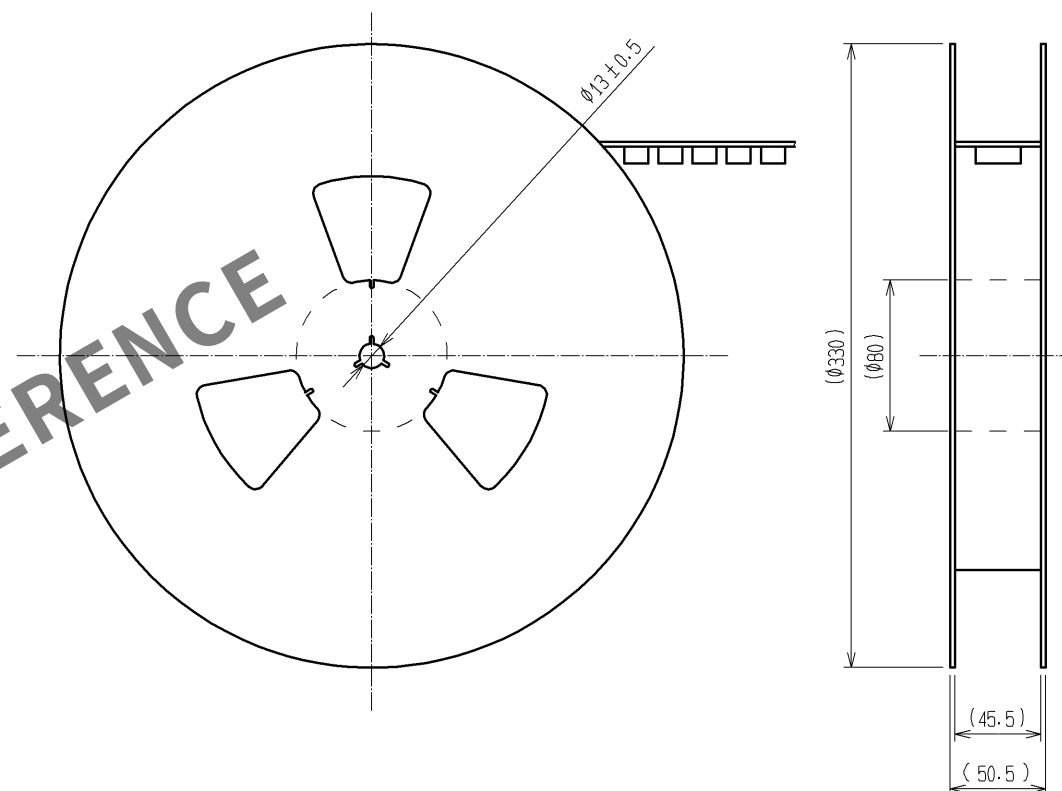

THE DIRECTION OF PULLING OUT 



DETAIL FOR VACUUM PICKUP (5:1)



- NOTES
- 1 REEL : 1000 CONNECTORS.
 - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 5 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

DRAWING NO.	EDC3-152113-22		
PART NO.	FX11LB-80S/8-SV(92)		
CODE NO.	CL573-0113-8-92		