

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





1 2 3 4 5 6 7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

A B C D E F

RECOMMEND PC BOARD HOLE PATTERN (MOUNTING SIDE)



MATING SIDE

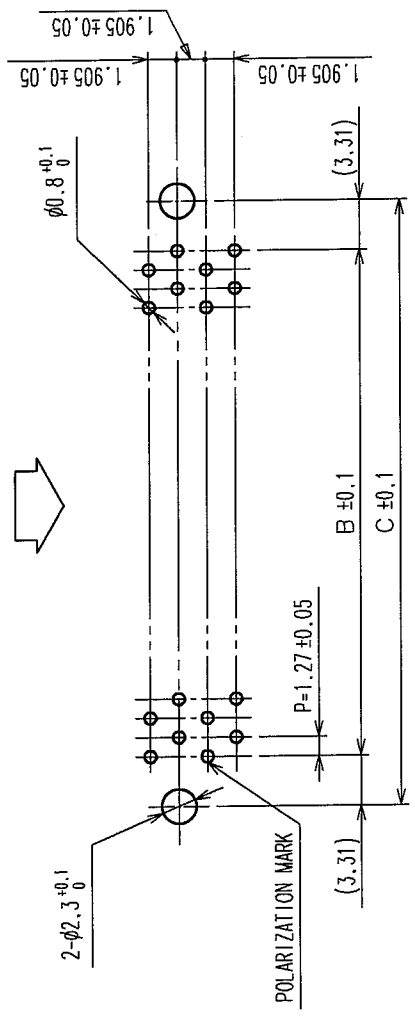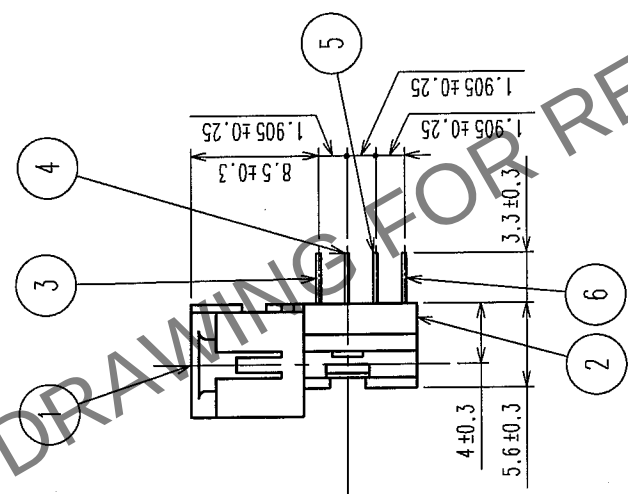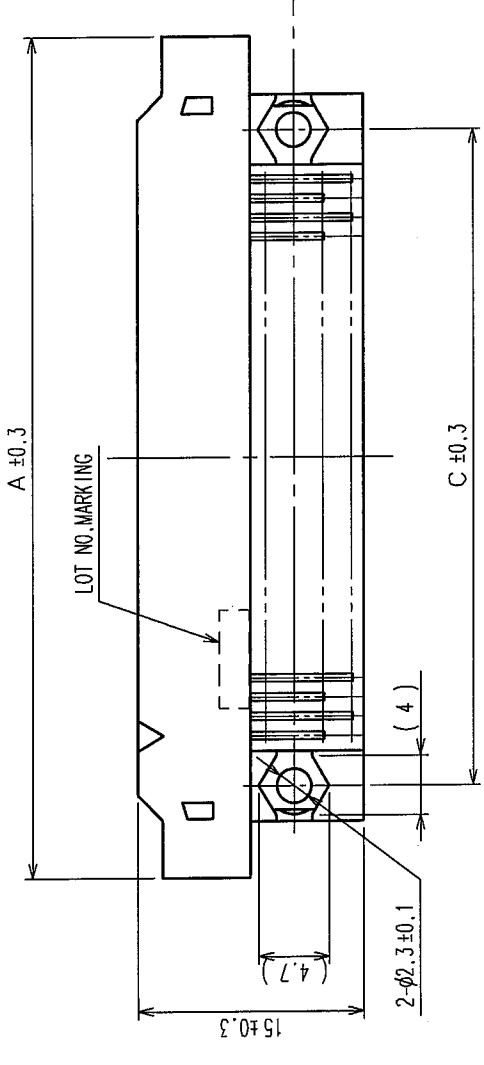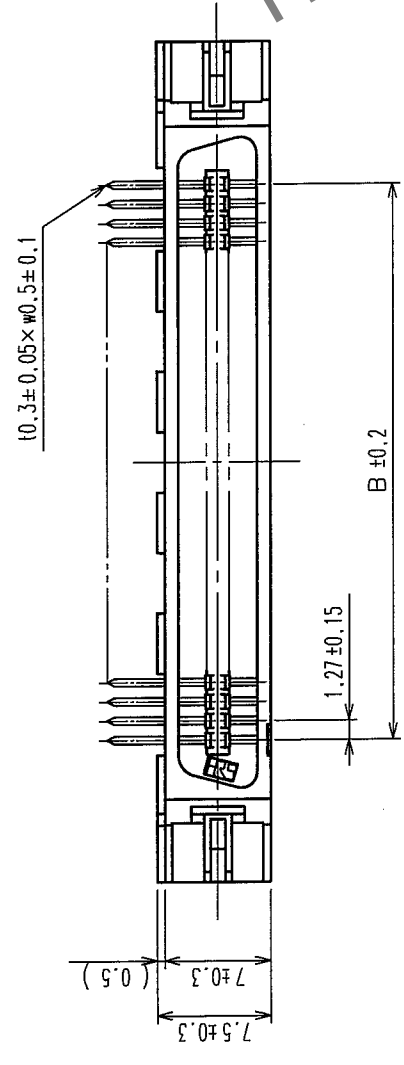

PART No.	CODE No.	A	B	C	D
FX2B-20PA-1.27DS(71)	CL572-0721-7-71	20	30.33	11.43	18.05
FX2B-32PA-1.27DS(71)	CL572-0722-0-71	32	37.95	19.05	25.67
FX2B-40PA-1.27DS(71)	CL572-0723-2-71	40	43.03	24.13	30.75
FX2B-52PA-1.27DS(71)	CL572-0724-5-71	52	50.65	31.75	38.37
FX2B-60PA-1.27DS(71)	CL572-0725-8-71	60	55.73	36.83	43.45
FX2B-68PA-1.27DS(71)	CL572-0726-0-71	68	60.81	41.91	48.53
FX2B-80PA-1.27DS(71)	CL572-0727-3-71	80	68.43	49.53	56.15
FX2B-100PA-1.27DS(71)	CL572-0728-6-71	100	81.13	62.23	68.85

NOTES 1 STANDOFF DIFFERS ACCORDING TO PRODUCTS.
2 NUMBER OF PIN.
3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

D (INDICATIONS)

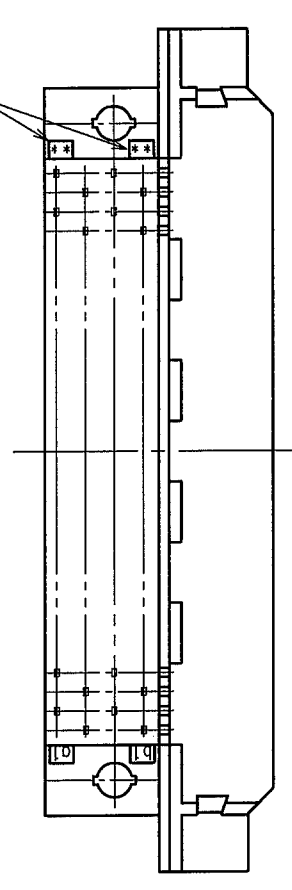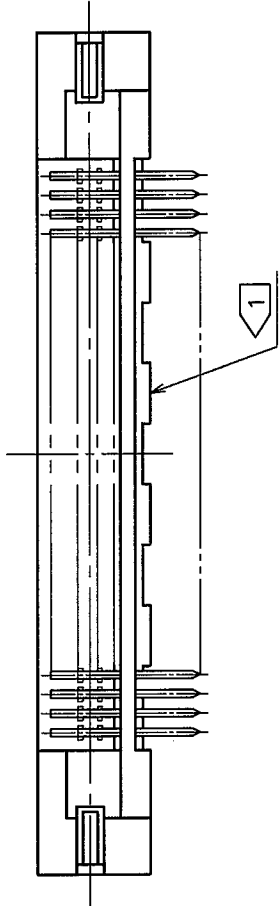

1, 2 POLYAMIDE	BLACK	UL94V-0	3~6	BRASS	CONTACT AREA: GOLD FLASH DIP AREA: TIN-PLATING 2μm min UNDER PLATING: NICKEL 1μm min		
NO.	MATERIAL	FINISH,	REMARKS	NO.	MATERIAL	FINISH,	REMARKS
CODE NO. (OLD) CL				DRAWN I. OKAYAMA	DESIGNED K. NAKAMURA	CHECKED H. OKAWA	APPROVED H. OKAWA
				04.06.02	04.06.02	04.06.14	04.06.14
DRAWING NO. EDC3-153963-21				PART NO. FX2B-**PA-1.27DS(71)			
SCALE FREE				CODE NO. CL572			
UNITS mm				1			

HIROSE ELECTRIC CO., LTD.		8 FORM NO. 233	
CL572		CL572	