
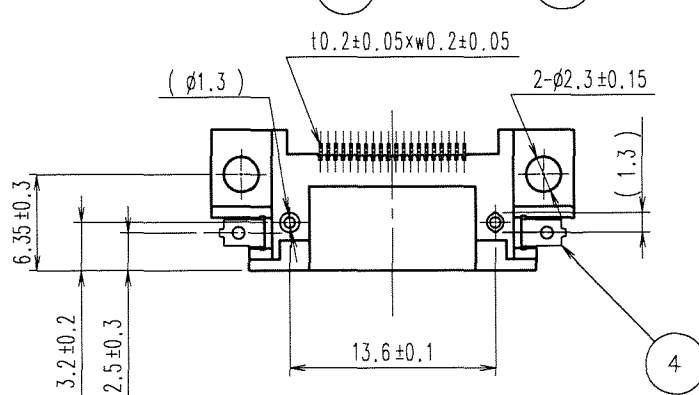
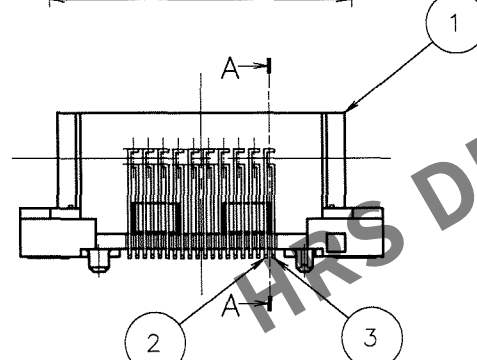
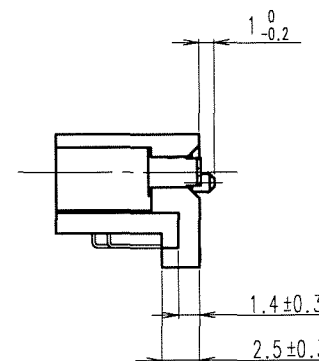
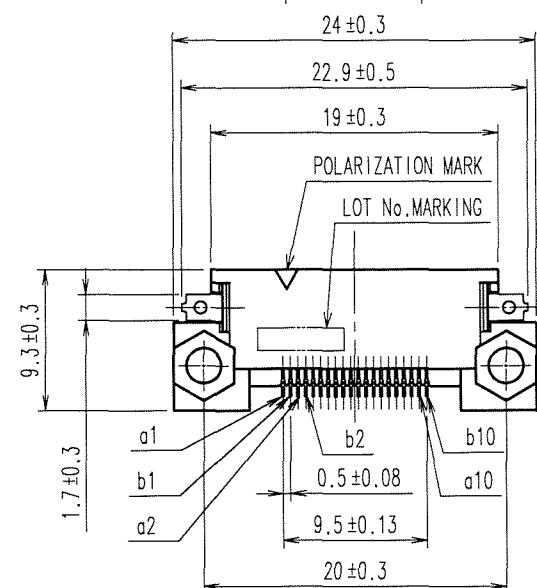



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	B Y	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

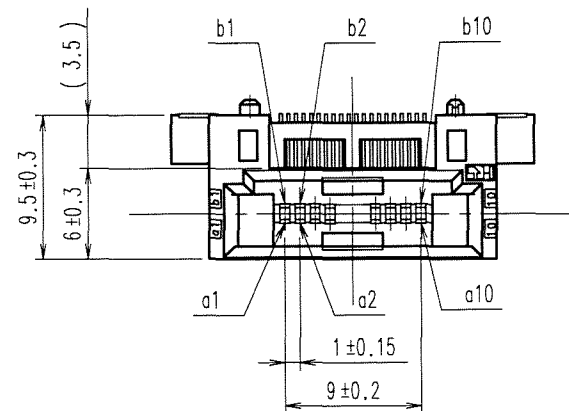



NOTE 1 LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS TO BE 0.1 MAX.
2 NOTE THAT THE REFERENCE TIGHTENING TORQUE IS 0.15 N · m.
3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED P.C.B. LAND PATTERN (MOUNTING SIDE)

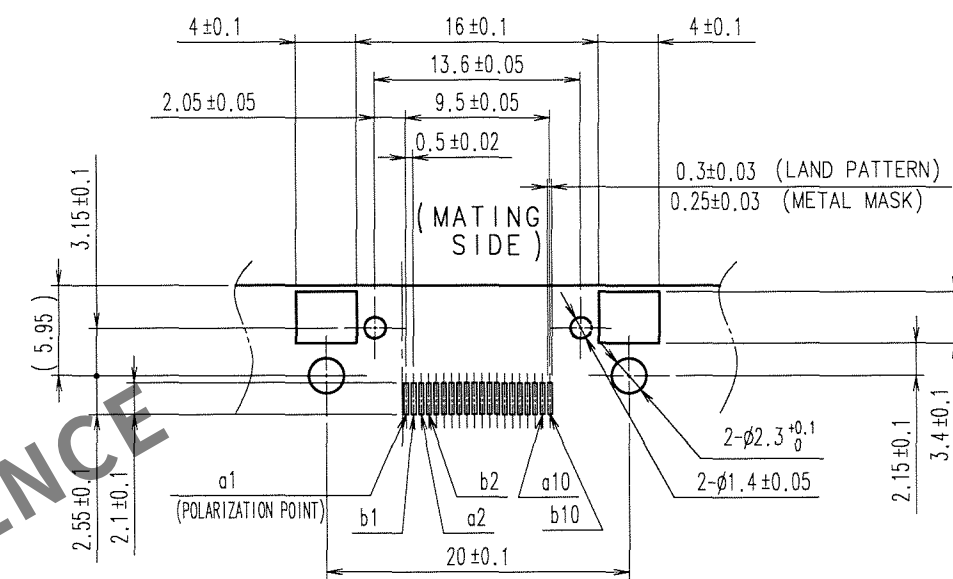

A-A (5:1)

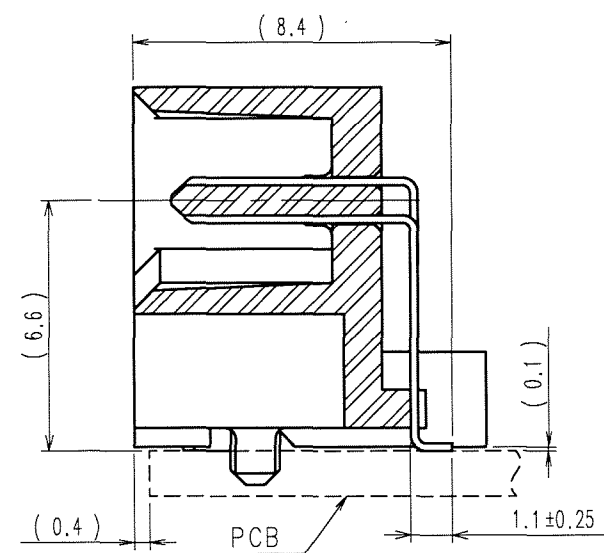

4	BRASS	TIN-PLATING	2, 3	BRASS	CONTACT AREA : GOLD 0.1μm min.		
1	POLYAMIDE	BEIGE UL94V-0			LEAD AREA : TIN-PLATING 1μm min.		
NO. MATERIAL FINISH, REMARKS			NO. MATERIAL FINISH, REMARKS				
CODE NO. (OLD) CL			DRAWN K.DOI '06.09.30	DESIGNED K. Doi '06.10.04	CHECKED Jel. Ogawa '06.10.04	APPROVED H. Okawa '06.10.04	RELEASED
			DRAWING NO. EDC3-151388-21		PART NO. FX5-20P-SH3(71)		
SCALE 2 : 1			 HIROSE ELECTRIC CO., LTD.		CODE NO. CL575-0041-1-71		1/1
UNITS mm							

8 FORM NO. 229