
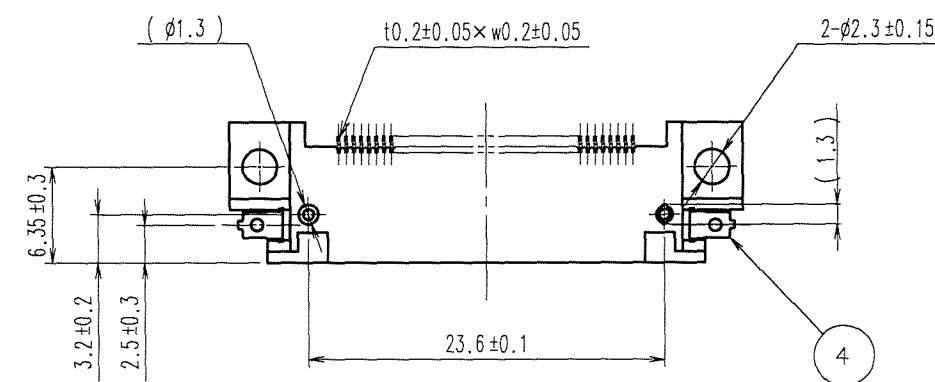
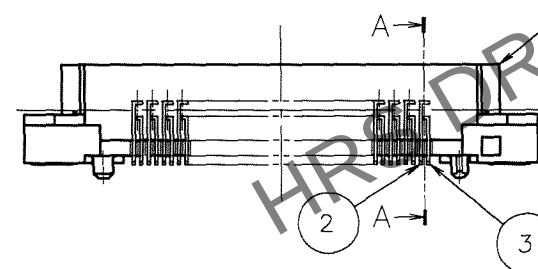
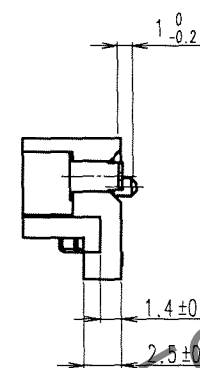
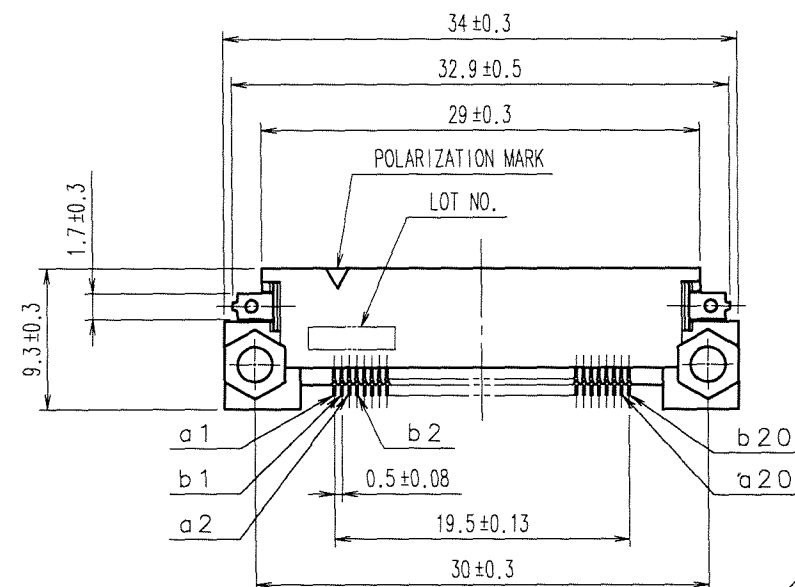
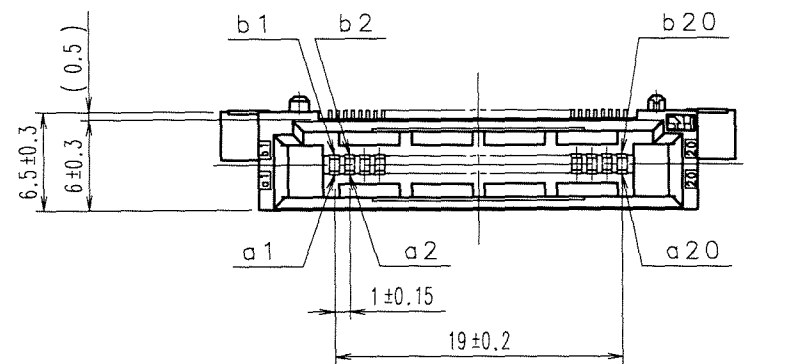
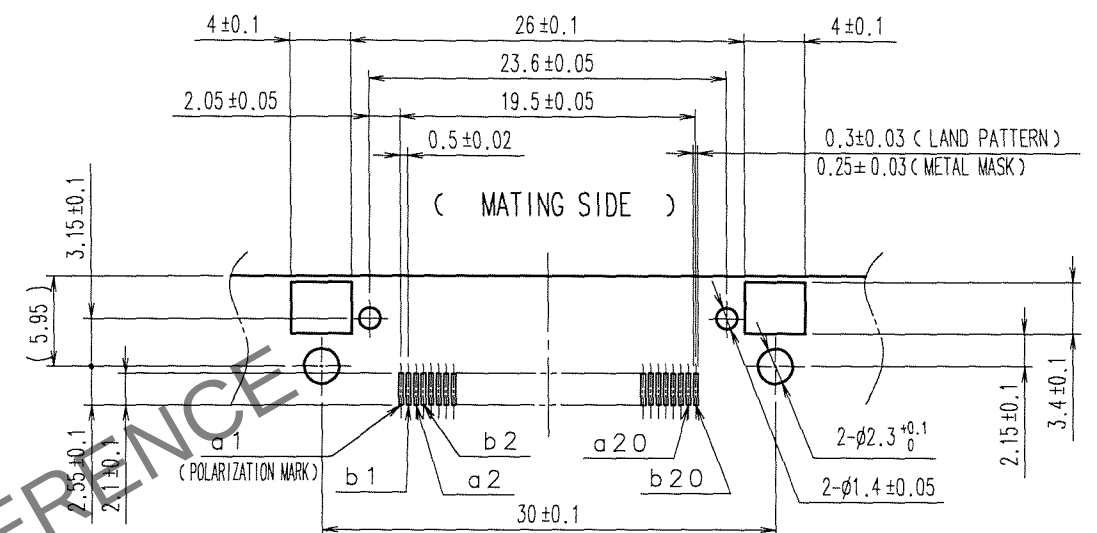



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

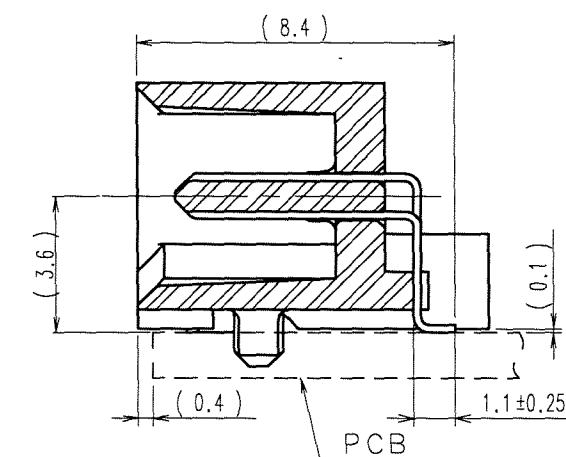

RECOMMENDED PCB HOLE PATTERN (MOUNTING SIDE)


$$A - A(5:1)$$


4	BRASS	TIN-PLATING	2, 3	BRASS	CONTACT AREA: GOLD 0.1μm min.	
1	POLYAMIDE	BEIGE UL94V-0			LEAD AREA: TIN-PLATING 1μm min.	
NO. MATERIAL FINISH, REMARKS			NO. MATERIAL FINISH, REMARKS		UNDER PLATING: NICKEL 1μm min.	
CODE NO. (OLD) CL			DRAWN A. SUZUKAWA 06.10.04	DESIGNED <i>M. Nakamura</i> 06.10.04	CHECKED <i>K. Ogawa</i> 06.10.04	APPROVED <i>H. Okawa</i> 06.10.04
			DRAWING NO. EDC3-151513-21		PART NO. FX5-40P-SH(71)	
SCALE 2 : 1			 HIROSE ELECTRIC CO., LTD.		CODE NO. CL575-0005-8-71	
UNITS					1 1	

NOTES 1. LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS TO BE 0.1 MAX.
2. NOTE THAT THE REFERENCE TIGHTENING TORQUE IS 0.15 N · m.
3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO
PCK

FORM NO. 229