


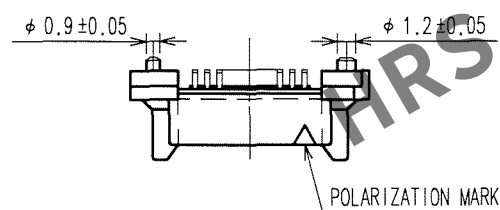
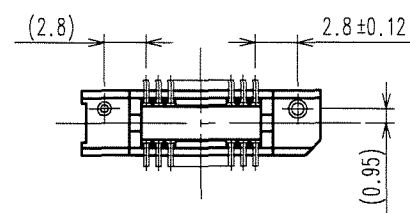
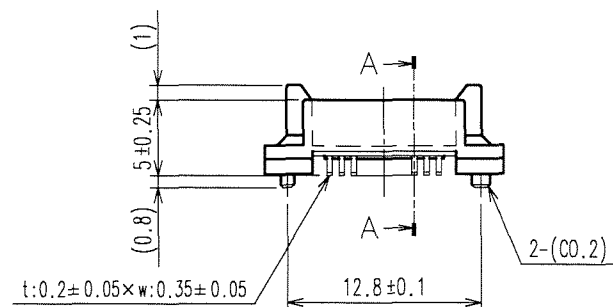


Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

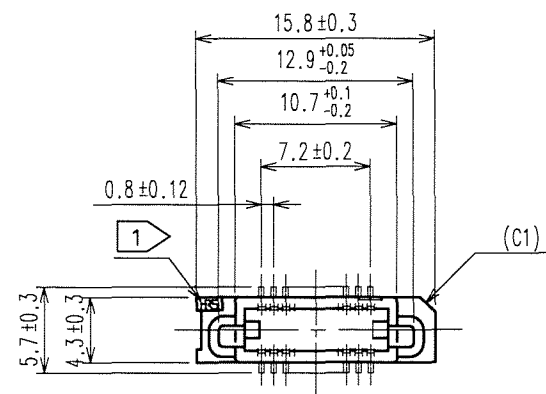


A-A (10:1)

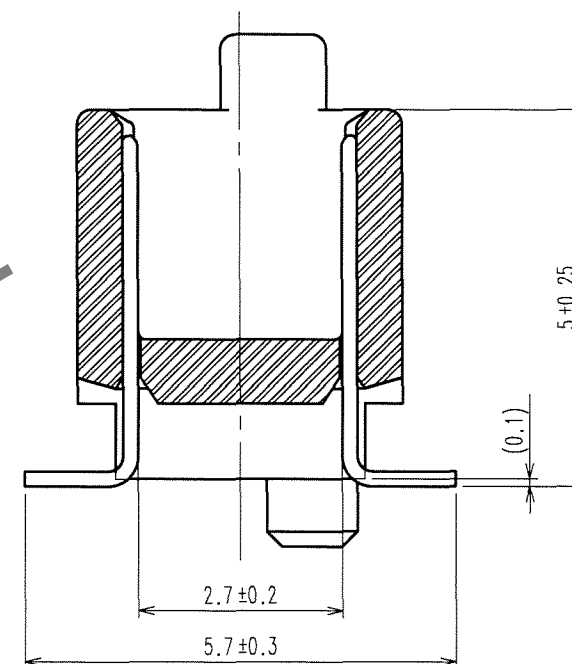


- NOTE
- 1 HRS MARK SHALL BE OPTIONAL
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)

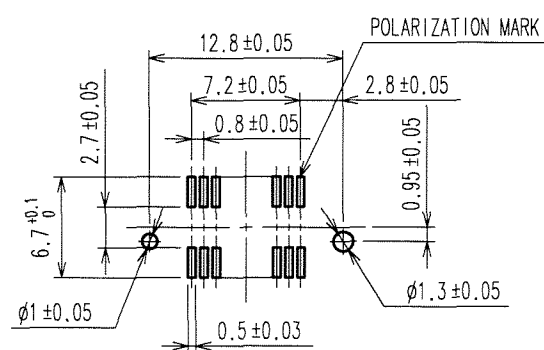

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.				
					LEAD AREA:TIN-PLATING 1μm min.				
					UNDER PLATING:NICKEL 1μm min.				
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS				
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED		
			T.YANAGISAWA '06.04.24	T.YANAGISAWA '06.04.24	H. Ogawa '06.04.24	H. Okawa '06.04.25	. .		
 SCALE 2 : 1 UNITS 			DRAWING NO.		PART NO.				
			EDC3-084963-25		FX6-20P-0.8SV1(71)				
			HRS HIROSE ELECTRIC CO., LTD		CODE NO.			1/1	
			CL576-0021-0-71						