

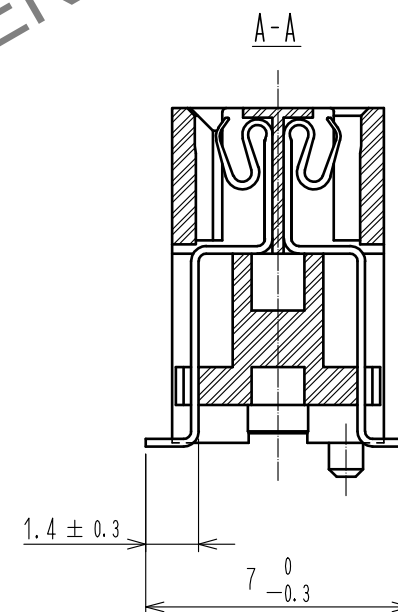
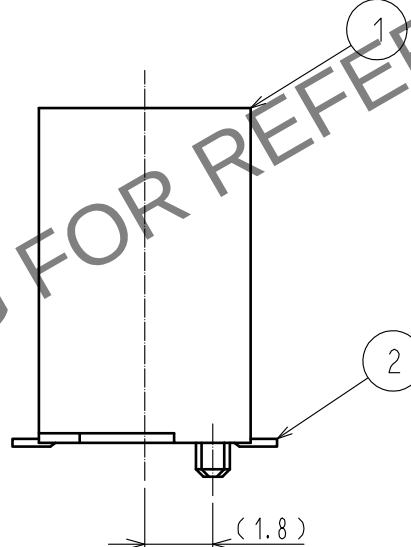
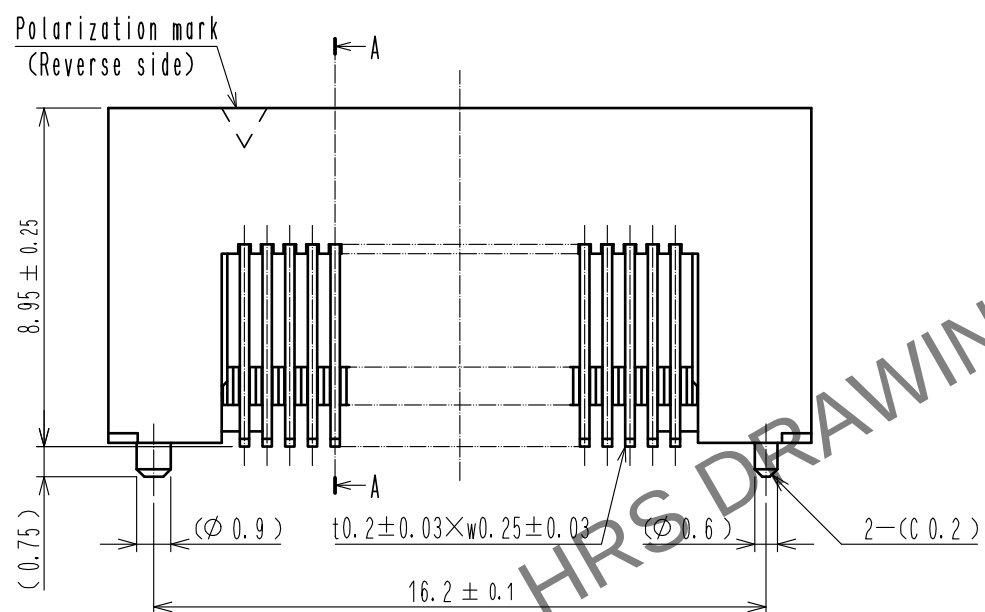


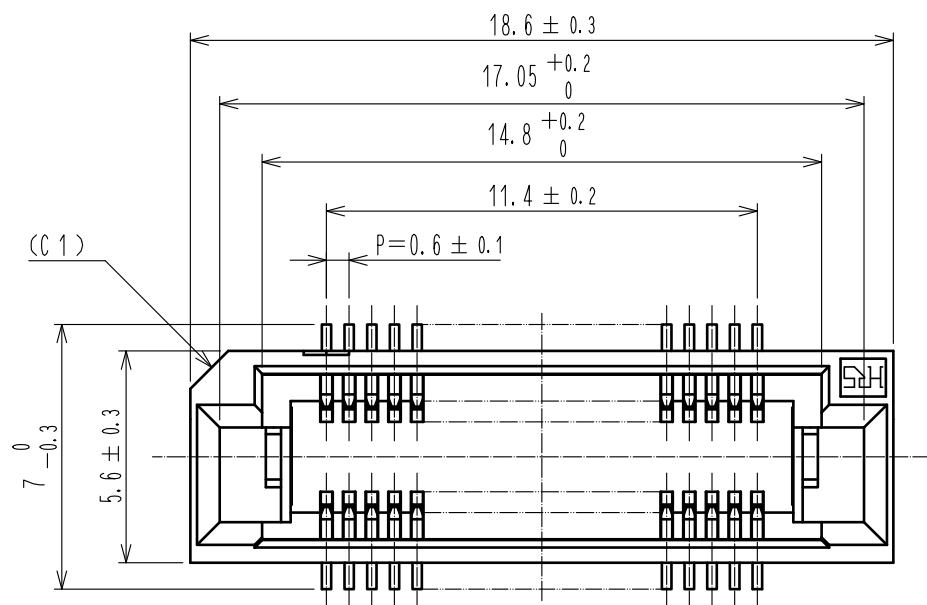

Recommended land pattern dimension of PCB (mounting side) (2:1)

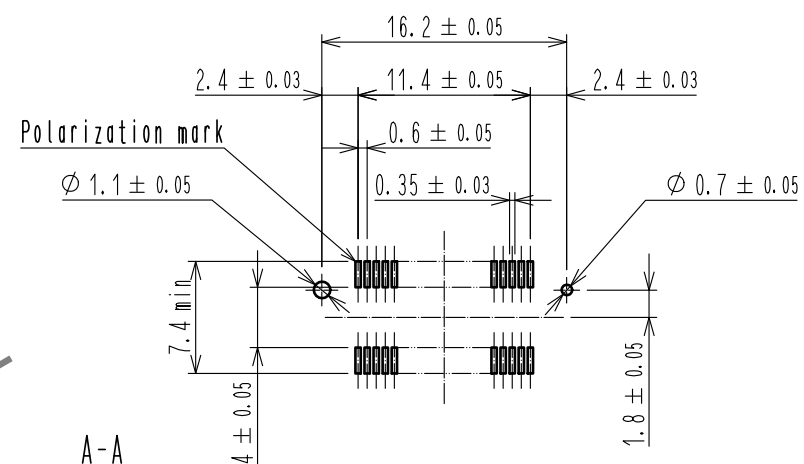

- Notes 1 Lead CO-PLANARITY shall be 0.1mm max.
2 For modification, etc., preventive hole for sink mark may be added according to circumstances.
3 The dimensions in parentheses are for reference.

				2		PHOSPHOR BRONZE		Contact area : Gold 0.1μm min.	
1. 3		PPS		Light brown (UL94V-0)				Lead area : Tin-plating 1μm min.	
NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL	
								Under plating : Nickel 1μm min.	
								FINISH . REMARKS	
UNITS mm				SCALE 5 : 1		COUNT 1		DESCRIPTION OF REVISIONS	
						DIS-F-00006419		DESIGNED KS. NAKAJIMA	
								CHECKED HT. YAMAGUCHI	
								DATE 20200803	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		20070419		DRAWING NO.		EDC-151170-71-25	
		CHECKED : HS. OZAWA		20070419		PART NO.		FX8C-40S-SV5(71)	
		DESIGNED : SY. KAMIGA		20070419		CODE NO.		CL578-0829-1-71	
		DRAWN : SY. KAMIGA		20070419				 1/2	

 Added precaution



Mar.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

【Precaution】

When a board with multiple connectors mounted is mated, the connector may be damaged or deformed.
Please divide one side of the board so only one connector is mated per board.

OK

NG

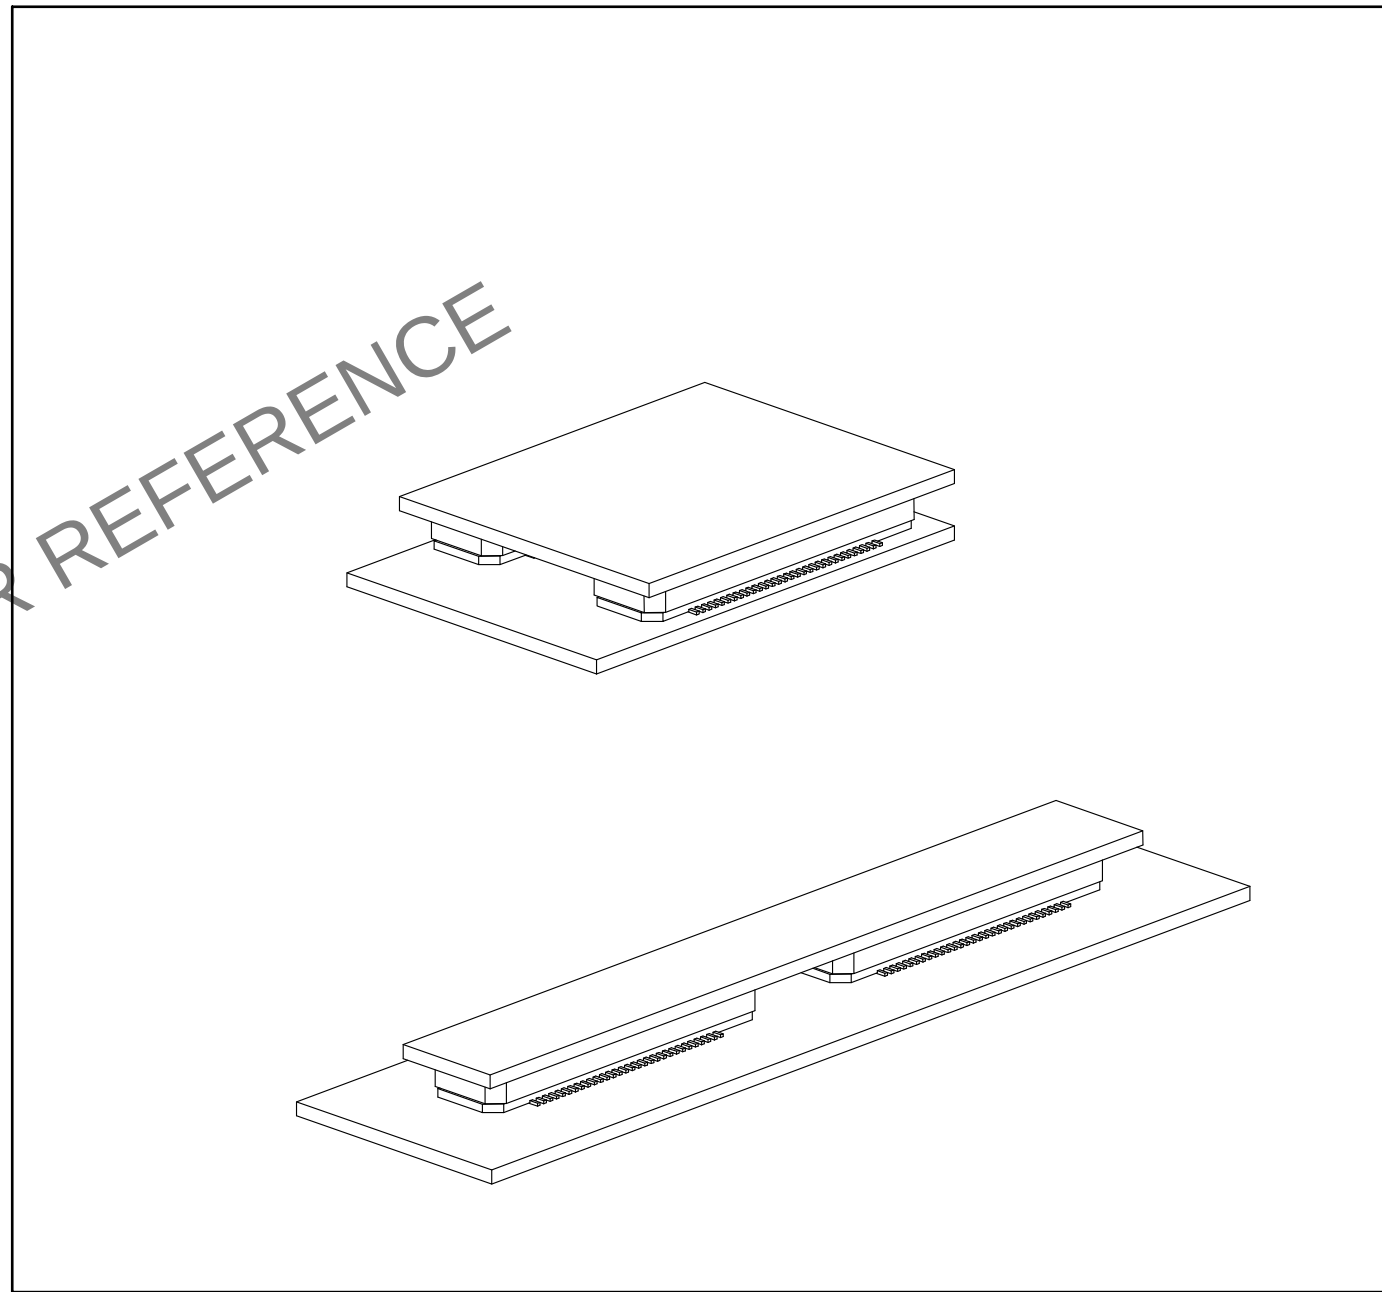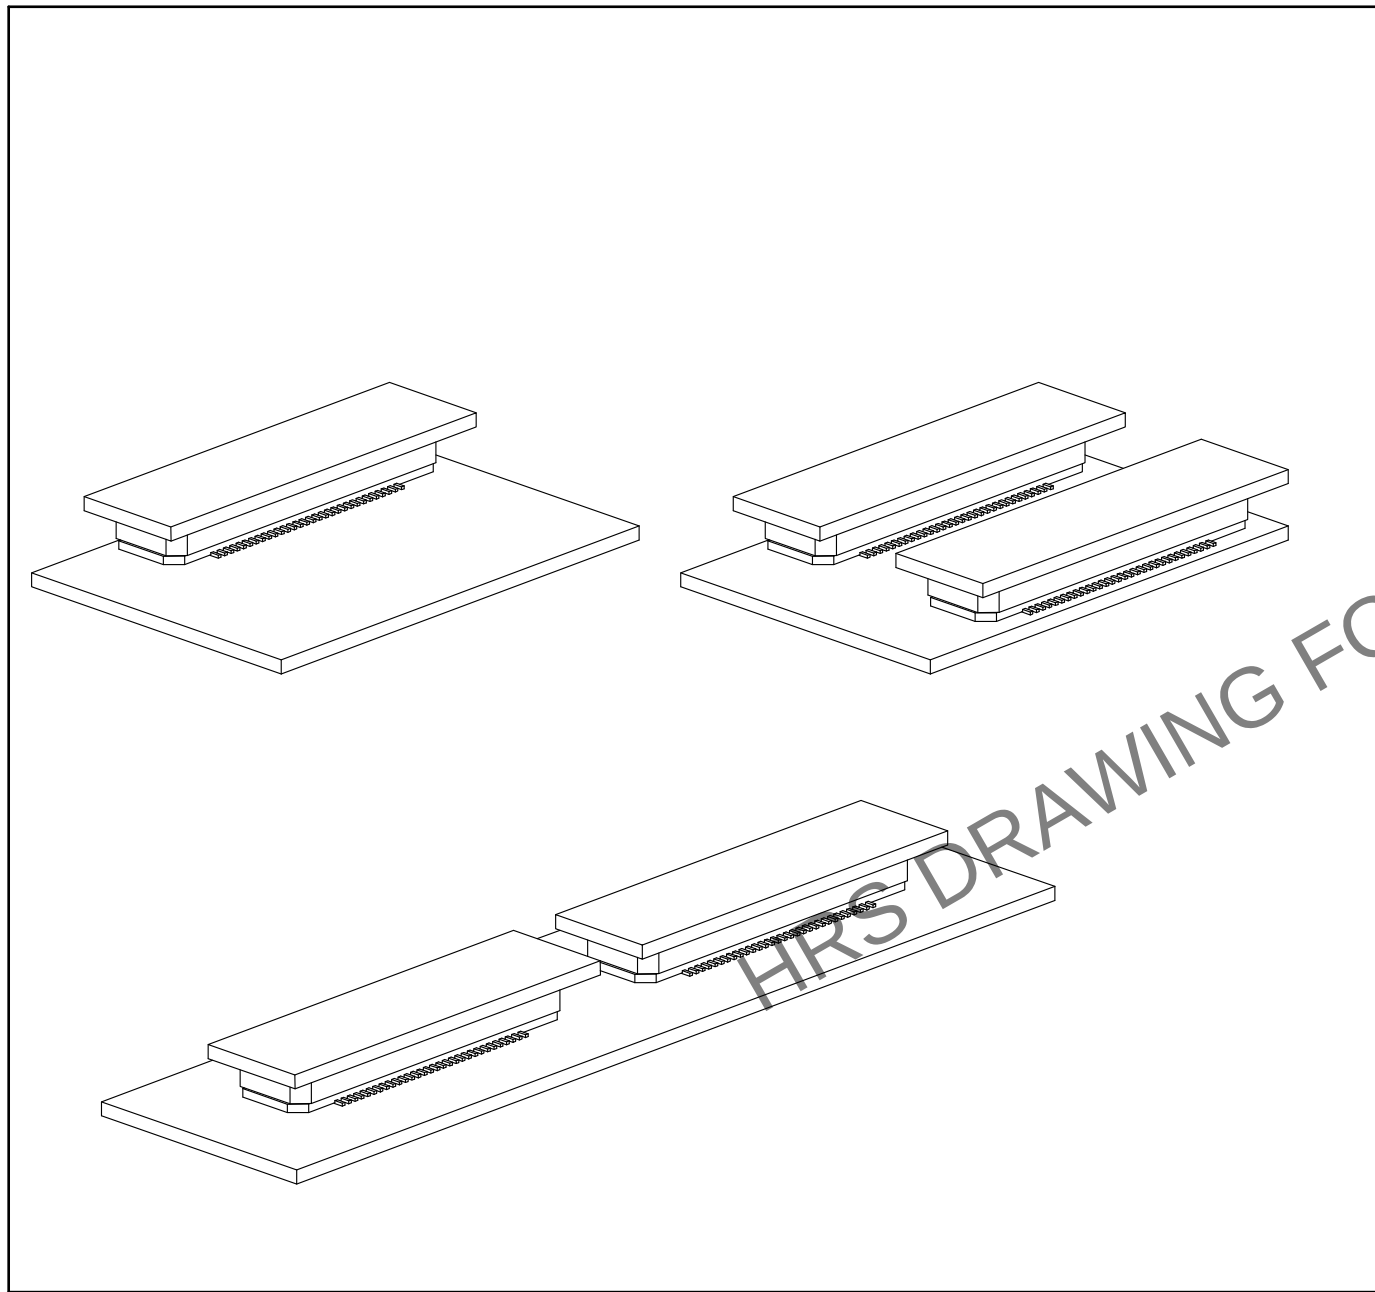

HRS DRAWING FOR REFERENCE

HRS

DRAWING NO.	EDC-151170-71-25
PART NO.	FX8C-40S-SV5(71)
CODE NO.	CL578-0829-1-71