

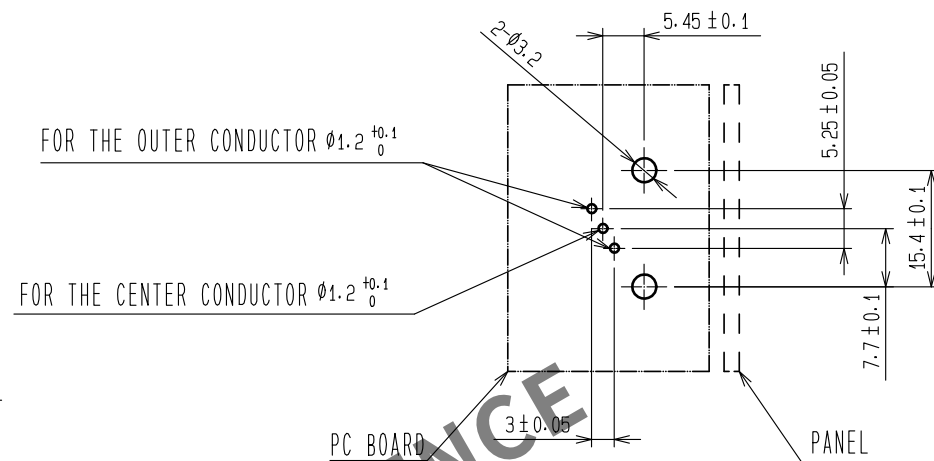
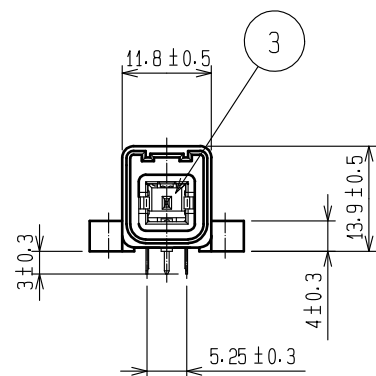


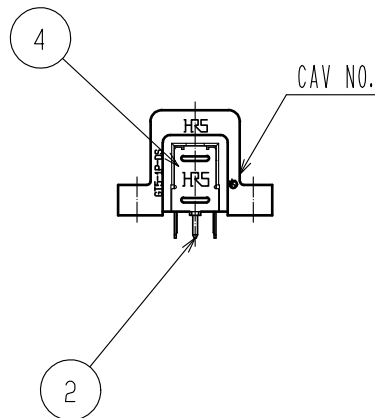


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


ELV. RoHS COMPLIANT

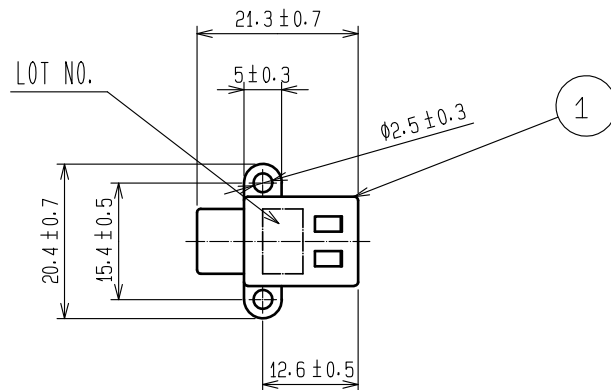

RECOMMENDED PC BOARD HOLE PATTERN

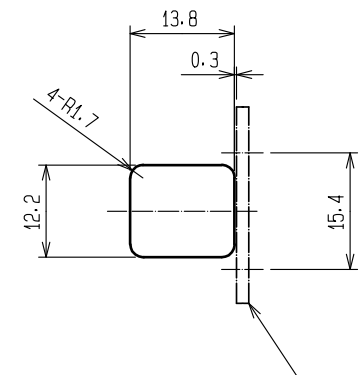

RECOMMENDED PANEL CUTOUT

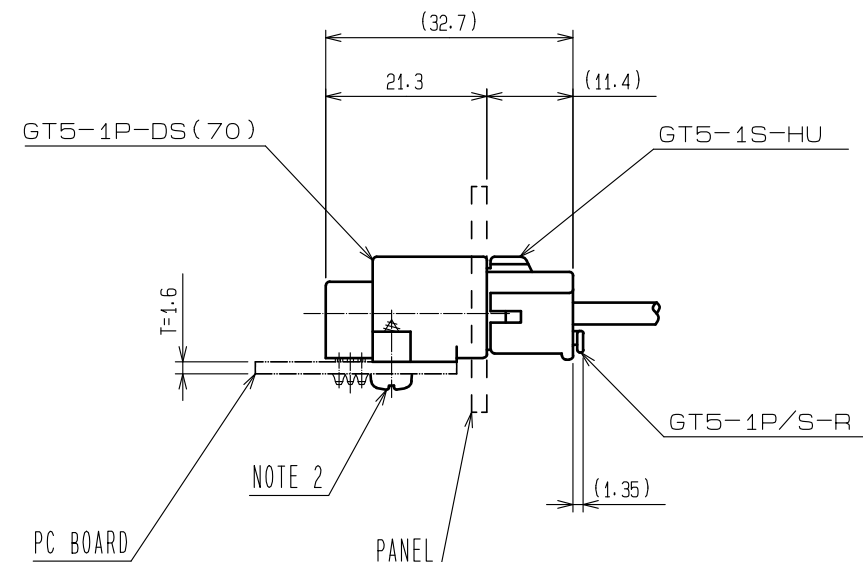

MATED CONNECTORS

- NOTE 1. DEPENDING ON THE CIRCUMSTANCES, RECESS OF WELDING SHALL BE ADDED TO MOLD TO PREVENT SINKAGE.
- △ 2. FIXING SCREW SHALL BE NOMINAL DIAMETER 3mm, LENGTH 6mm IN ACCORDANCE WITH CLASS 1 OR 4 OF JIS B1115, 1112. DO NOT USE ANY SCREWS OTHER THAN THE RECOMMENDED ONES.
- △ 3. INSTALL THE SCREWS PERPENDICULARLY TO THE BOARD.

2	BRASS	TIN PLATED	4	PHOSPHOR BRONZE	TIN PLATED
1	PBT	UL94V-0, LIGHT GRAY	3	PBT	UL94V-0, DARK GRAY
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm		SCALE 1 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-T-00008754	DESIGNED KN. MIKAMI
HIROSE ELECTRIC CO., LTD.		APPROVED : KS. SATOH	20070831	DRAWING NO. EDC3-071149-01	DATE 20210326
		CHECKED : NH. NAKATA	20070831	PART NO. GT5-1P-DS(70)	
		DESIGNED : MO. OKADA	20070831	CODE NO. CL0755-0007-5-70	
		DRAWN : MH. YAMAGUCHI	20070830		