


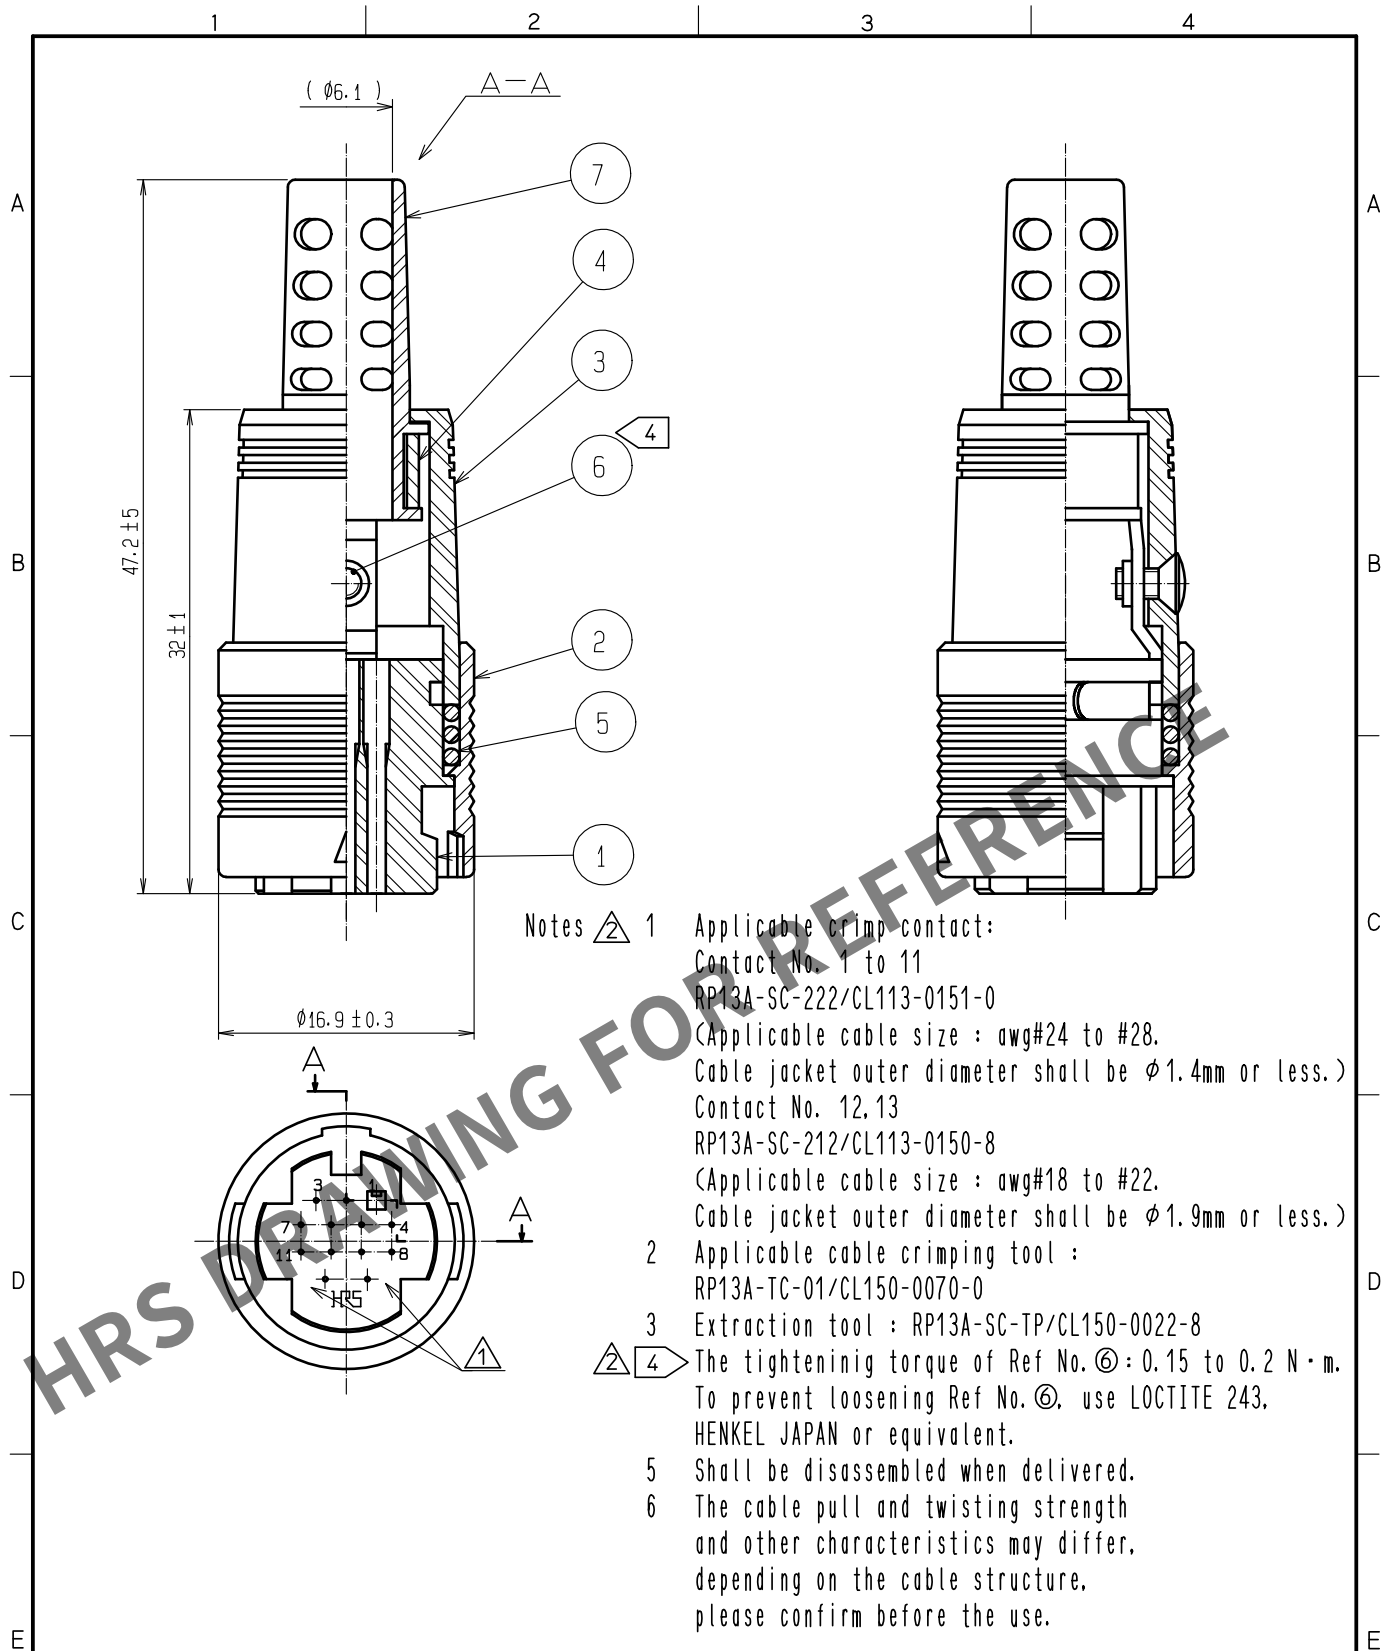

- Notes
- Applicable crimp contact:
Contact No. 1 to 11
RP13A-SC-222/CL113-0151-0
(Applicable cable size : awg#24 to #28.
Cable jacket outer diameter shall be $\phi 1.4\text{mm}$ or less.)
Contact No. 12,13
RP13A-SC-212/CL113-0150-8
(Applicable cable size : awg#18 to #22.
Cable jacket outer diameter shall be $\phi 1.9\text{mm}$ or less.)
 - Applicable cable crimping tool :
RP13A-TC-01/CL150-0070-0
 - Extraction tool : RP13A-SC-TP/CL150-0022-8
 - The tightening torque of Ref No. ⑥ : 0.15 to 0.2 N · m.
To prevent loosening Ref No. ⑥, use LOCTITE 243,
HENKEL JAPAN or equivalent.
 - Shall be disassembled when delivered.
 - The cable pull and twisting strength
and other characteristics may differ,
depending on the cable structure,
please confirm before the use.

4	Brass							
3	Polycarbonate	(BLACK) UL94V-0	7	Polyvinylchloride	(BLACK)			
2	Polycarbonate	(BLACK) UL94V-0	6	Brass	Black chromete treatment (Trivalent chromium) JIS B 1111 M2X0.4X4			
1	Polycarbonate	(BLACK) UL94V-0	5	Steel	Nickel plating			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00009777	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20220209	
HIROSE ELECTRIC CO., LTD.		APPROVED	HY. KOBAYASHI	20180226	DRAWING NO.	EDC-009829-31-00		
		CHECKED	HY. KOBAYASHI	20180226	PART NO.	RP13A-12PB-13SC(31)		
		DESIGNED	DS. MATSUNE	20180224	CODE NO.	CL0113-0184-0-31		
		DRAWN	AI. NISHIYAMA	20180216				