



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

FIGURE-2 (1:1)

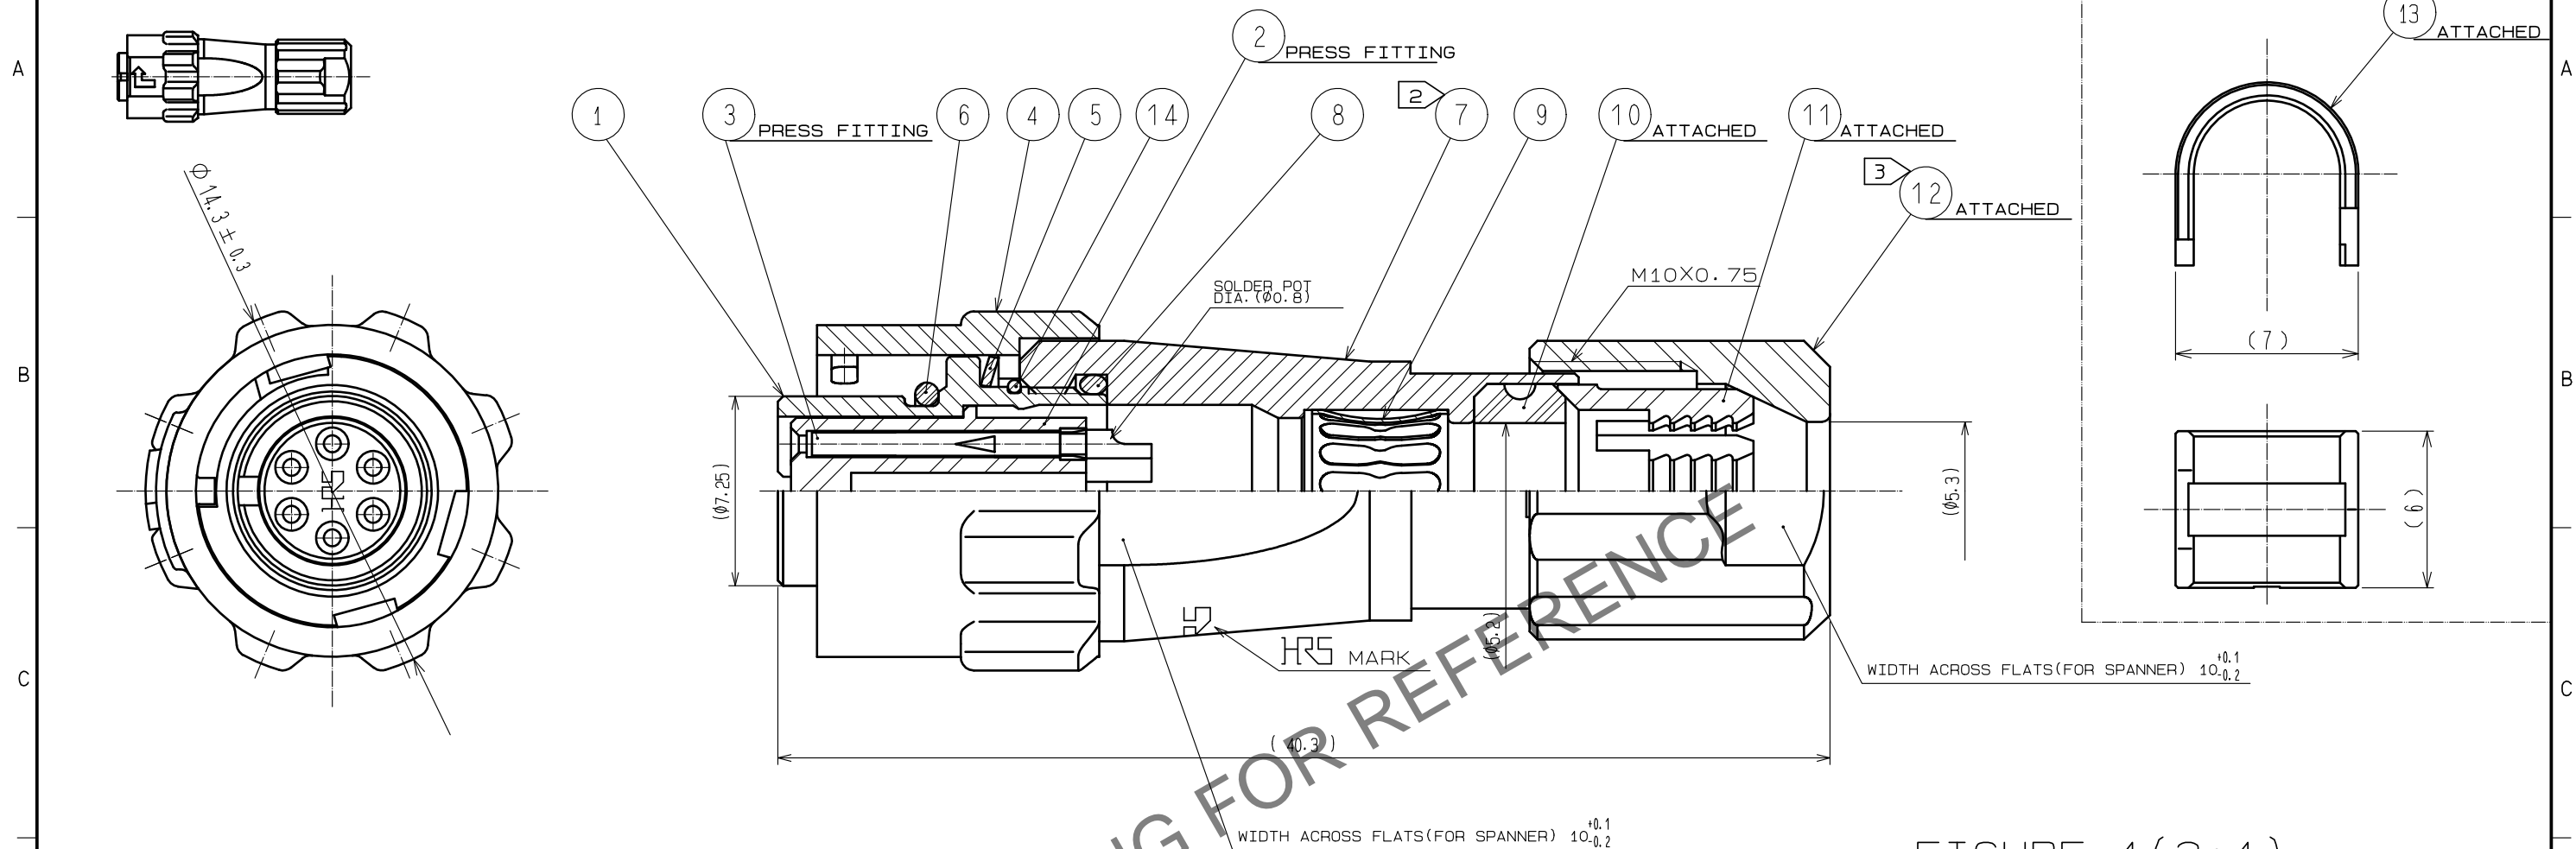

- NOTES
- 1 PLATING(REF.NO.0)
CONTACT AREA : GOLD 0.2μm min
TERMINAL AREA:GOLD FLACH
UNDER PLATING : NICKEL 2μm min
 - 2 THE RECOMMENDED CLAMP TORQUE OF REF.NO.0 TO BE 1 TO 1.5N·m.
APPLY LOCTITE 263 HENKEL JAPAN OR EQUIVALENT TO THE THREADED PORTION OF REF.NO.0 IN ORDER TO PREVENT LOOSENING.
 - 3 THE RECOMMENDED CLAMP TORQUE OF REF.NO.0 TO BE 0.8 TO 1N·m.
APPLY LOCTITE 263 + LOCK PRIMER 7649 HENKEL JAPAN OR EQUIVALENT TO THE THREADED PORTION (M10X0.75) OF REF.NO.0 IN ORDER TO PREVENT LOOSENING.
 - 4 FASTEN REF.NO.0 TO THE CABLE WITH THE CABLE CRIMPING TOOL.
AND MAKE REF.NO.0 CONTACT WITH REF.NO.0(REFER TO Fig.1).
REFER TO THE TECHNICAL SPECIFICATION ETAD-C0099 FOR DETAILS.
APPLICABLE CABLE CRIMPING TOOL : HR10A-TC-02(CL150-0041-2)(THE HOLE DIAMETER FOR CRIMPING:φ5.3)
 - 5 Fig.2 SHOWS THE APPEARANCE AFTER ASSEMBLY.
 - 6 APPLICABLE CABLE ASSEMBLY FIXTURE : LF07BP-T01(CL150-0232-0)
CABLE ASSEMBLY FIXTURE IS USED AS A RECEPTACLE STAND OF EXTRACT
AND THE PART No.0 OF AN ASSEMBLY.
 - 7 ROTATION EXAMPLES OF No.0, 0 AND 0 TO 0 ARE SHOWN.
 - 8 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.
 - 9 THIS PRODUCT MAY BE STAINED DUE TO LUBRICANT.
HOWEVER, THIS DOES NOT AFFECT THE PRODUCT PERFORMANCE, SO PLEASE USE IT AS IT IS.

FIGURE-1 (2:1)

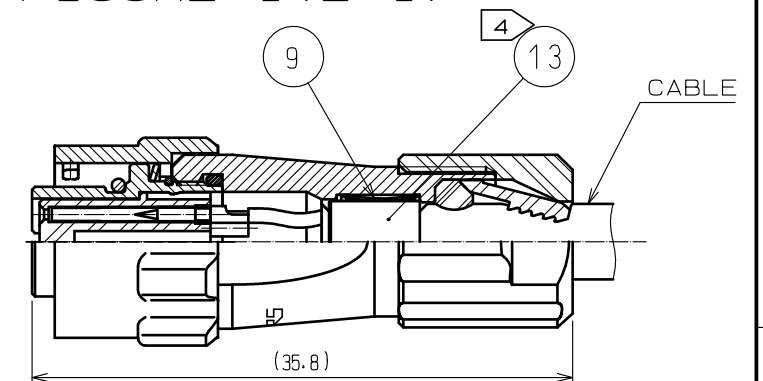

| | | | | | |
|---------------------------|--------------------|------------------------|----------|--------------------------|-------------------------|
| 7 | ZINIC ALLOY | BLACK CHROME PLATING | 14 | STAINLESS STEEL | |
| 6 | CHLOROPRENE RUBBER | (BLACK) | 13 | BRASS | NICKEL PLATING |
| 5 | STAINLESS STEEL | | 12 | PPS | (NATURAL BROWN) UL94V-0 |
| 4 | ZINIC ALLOY | BLACK CHROME PLATING | 11 | POLYAMIDE | (NATURAL MILKY) UL94V-0 |
| 3 | PHOSPHOR BRONZE | 1 | 10 | CHLOROPRENE RUBBER | (BLACK) |
| 2 | PPS | (BLACK) UL94V-0 | 9 | PHOSPHOR BRONZE | NICKEL PLATING |
| 1 | ZINIC ALLOY | BLACK CHROME PLATING | 8 | CHLOROPRENE RUBBER | (BLACK) |
| NO. | MATERIAL | FINISH . REMARKS | NO. | MATERIAL | FINISH . REMARKS |
| UNITS mm | | SCALE 4 : 1 | COUNT | DESCRIPTION OF REVISIONS | DESIGNED |
| HRS | | APPROVED : TP. KOMATSU | 20231227 | DRAWING NO. | EDC-117383-33-00 |
| HIROSE ELECTRIC CO., LTD. | | CHECKED : E.J. KUNII | 20231227 | PART NO. | LF07WBPD-6S(33) |
| | | DESIGNED : MK. WADA | 20231227 | CODE NO. | CL0136-0020-6-33 |
| | | DRAWN : MK. WADA | 20231227 | | |