

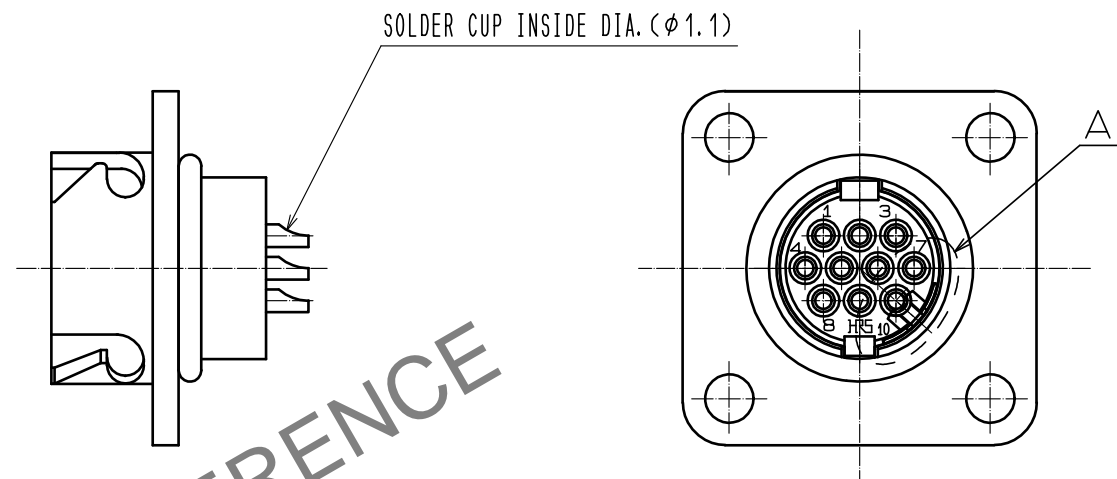
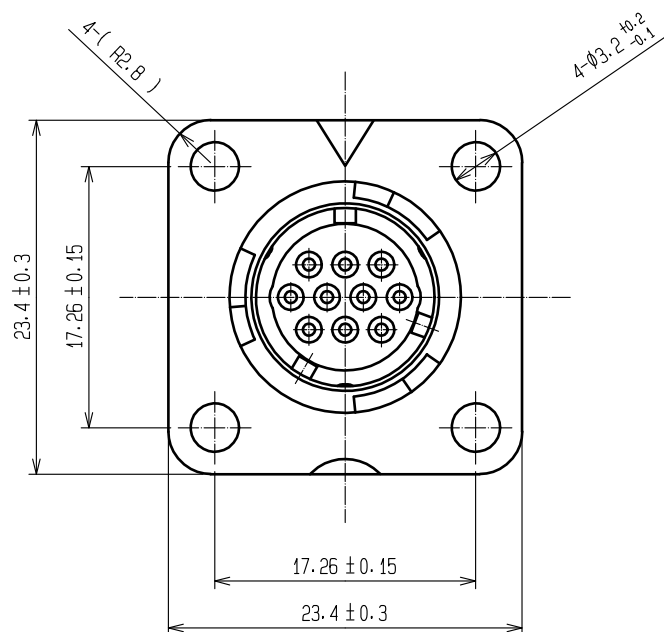
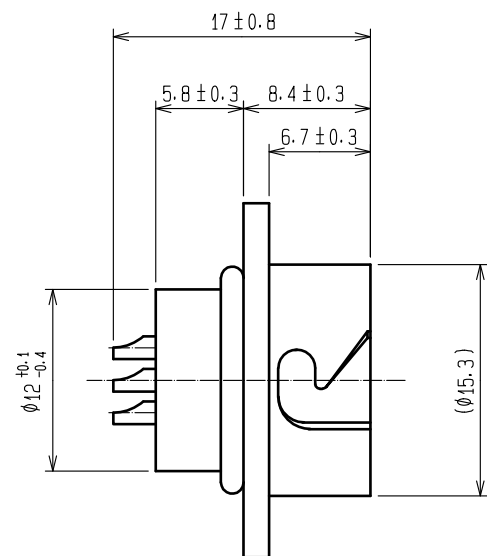
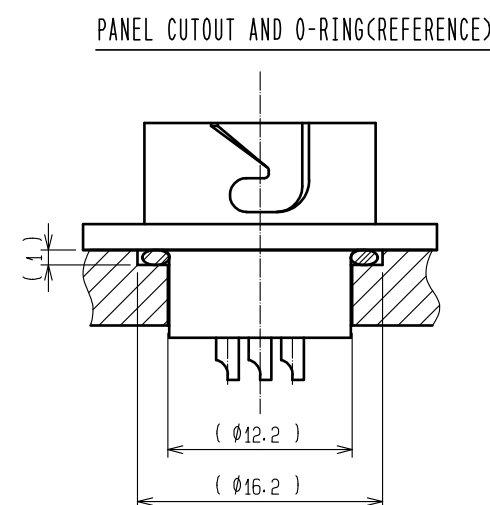


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

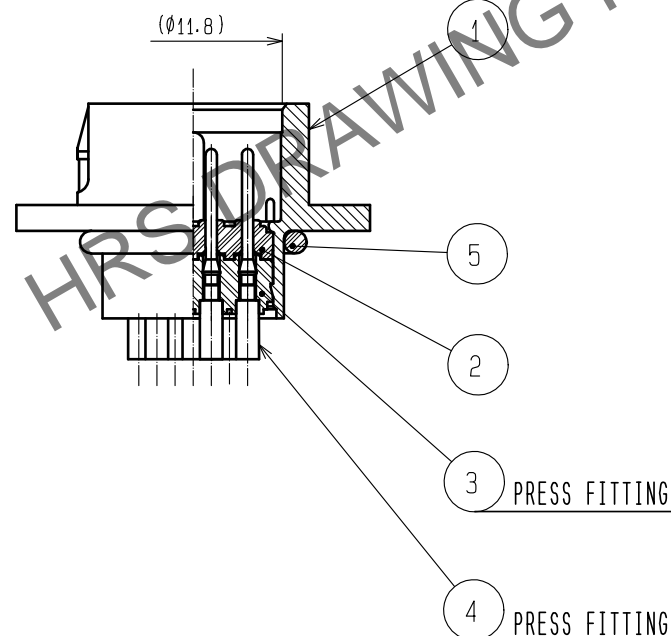

A (4:1)

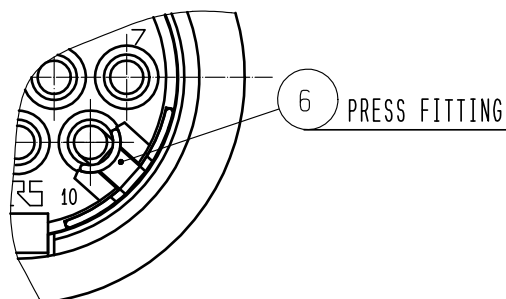

- NOTES 1 SURFACE:GOLD PLATING 0.2μm min.
UNDER PLATING:NICKEL PLATING 2μm min.
2 CHECK THAT THE O-RING IS PROPERLY SET AT THE GROOVE OF THE DEVICE.
WHILE MOUNTING THE CONNECTOR,MAKE SURE THAT THE O-RING IS NOT CAUGHT.

3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	ACRYLONITRILE BUTADIEN RUBBER	(BLACK)	5	ACRYLONITRILE BUTADIEN RUBBER	(BLACK) (DIA. Ø 1.5)
1	ZINC ALLOY	NICKEL PLATING	4	BRASS	1
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm	⊙	SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
APPROVED	HY. KOBAYASHI	18.02.26	DRAWING NO.	EDC-115623-31-00	CHECKED
CHECKED	HY. KOBAYASHI	18.02.26	PART NO.	HR08D-12WR-10P(31)	DATE
DESIGNED	DS. MATSUNE	18.02.24	CODE NO.	CL108-0218-4-31	
DRAWN	AI. NISHIYAMA	18.02.16			