


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

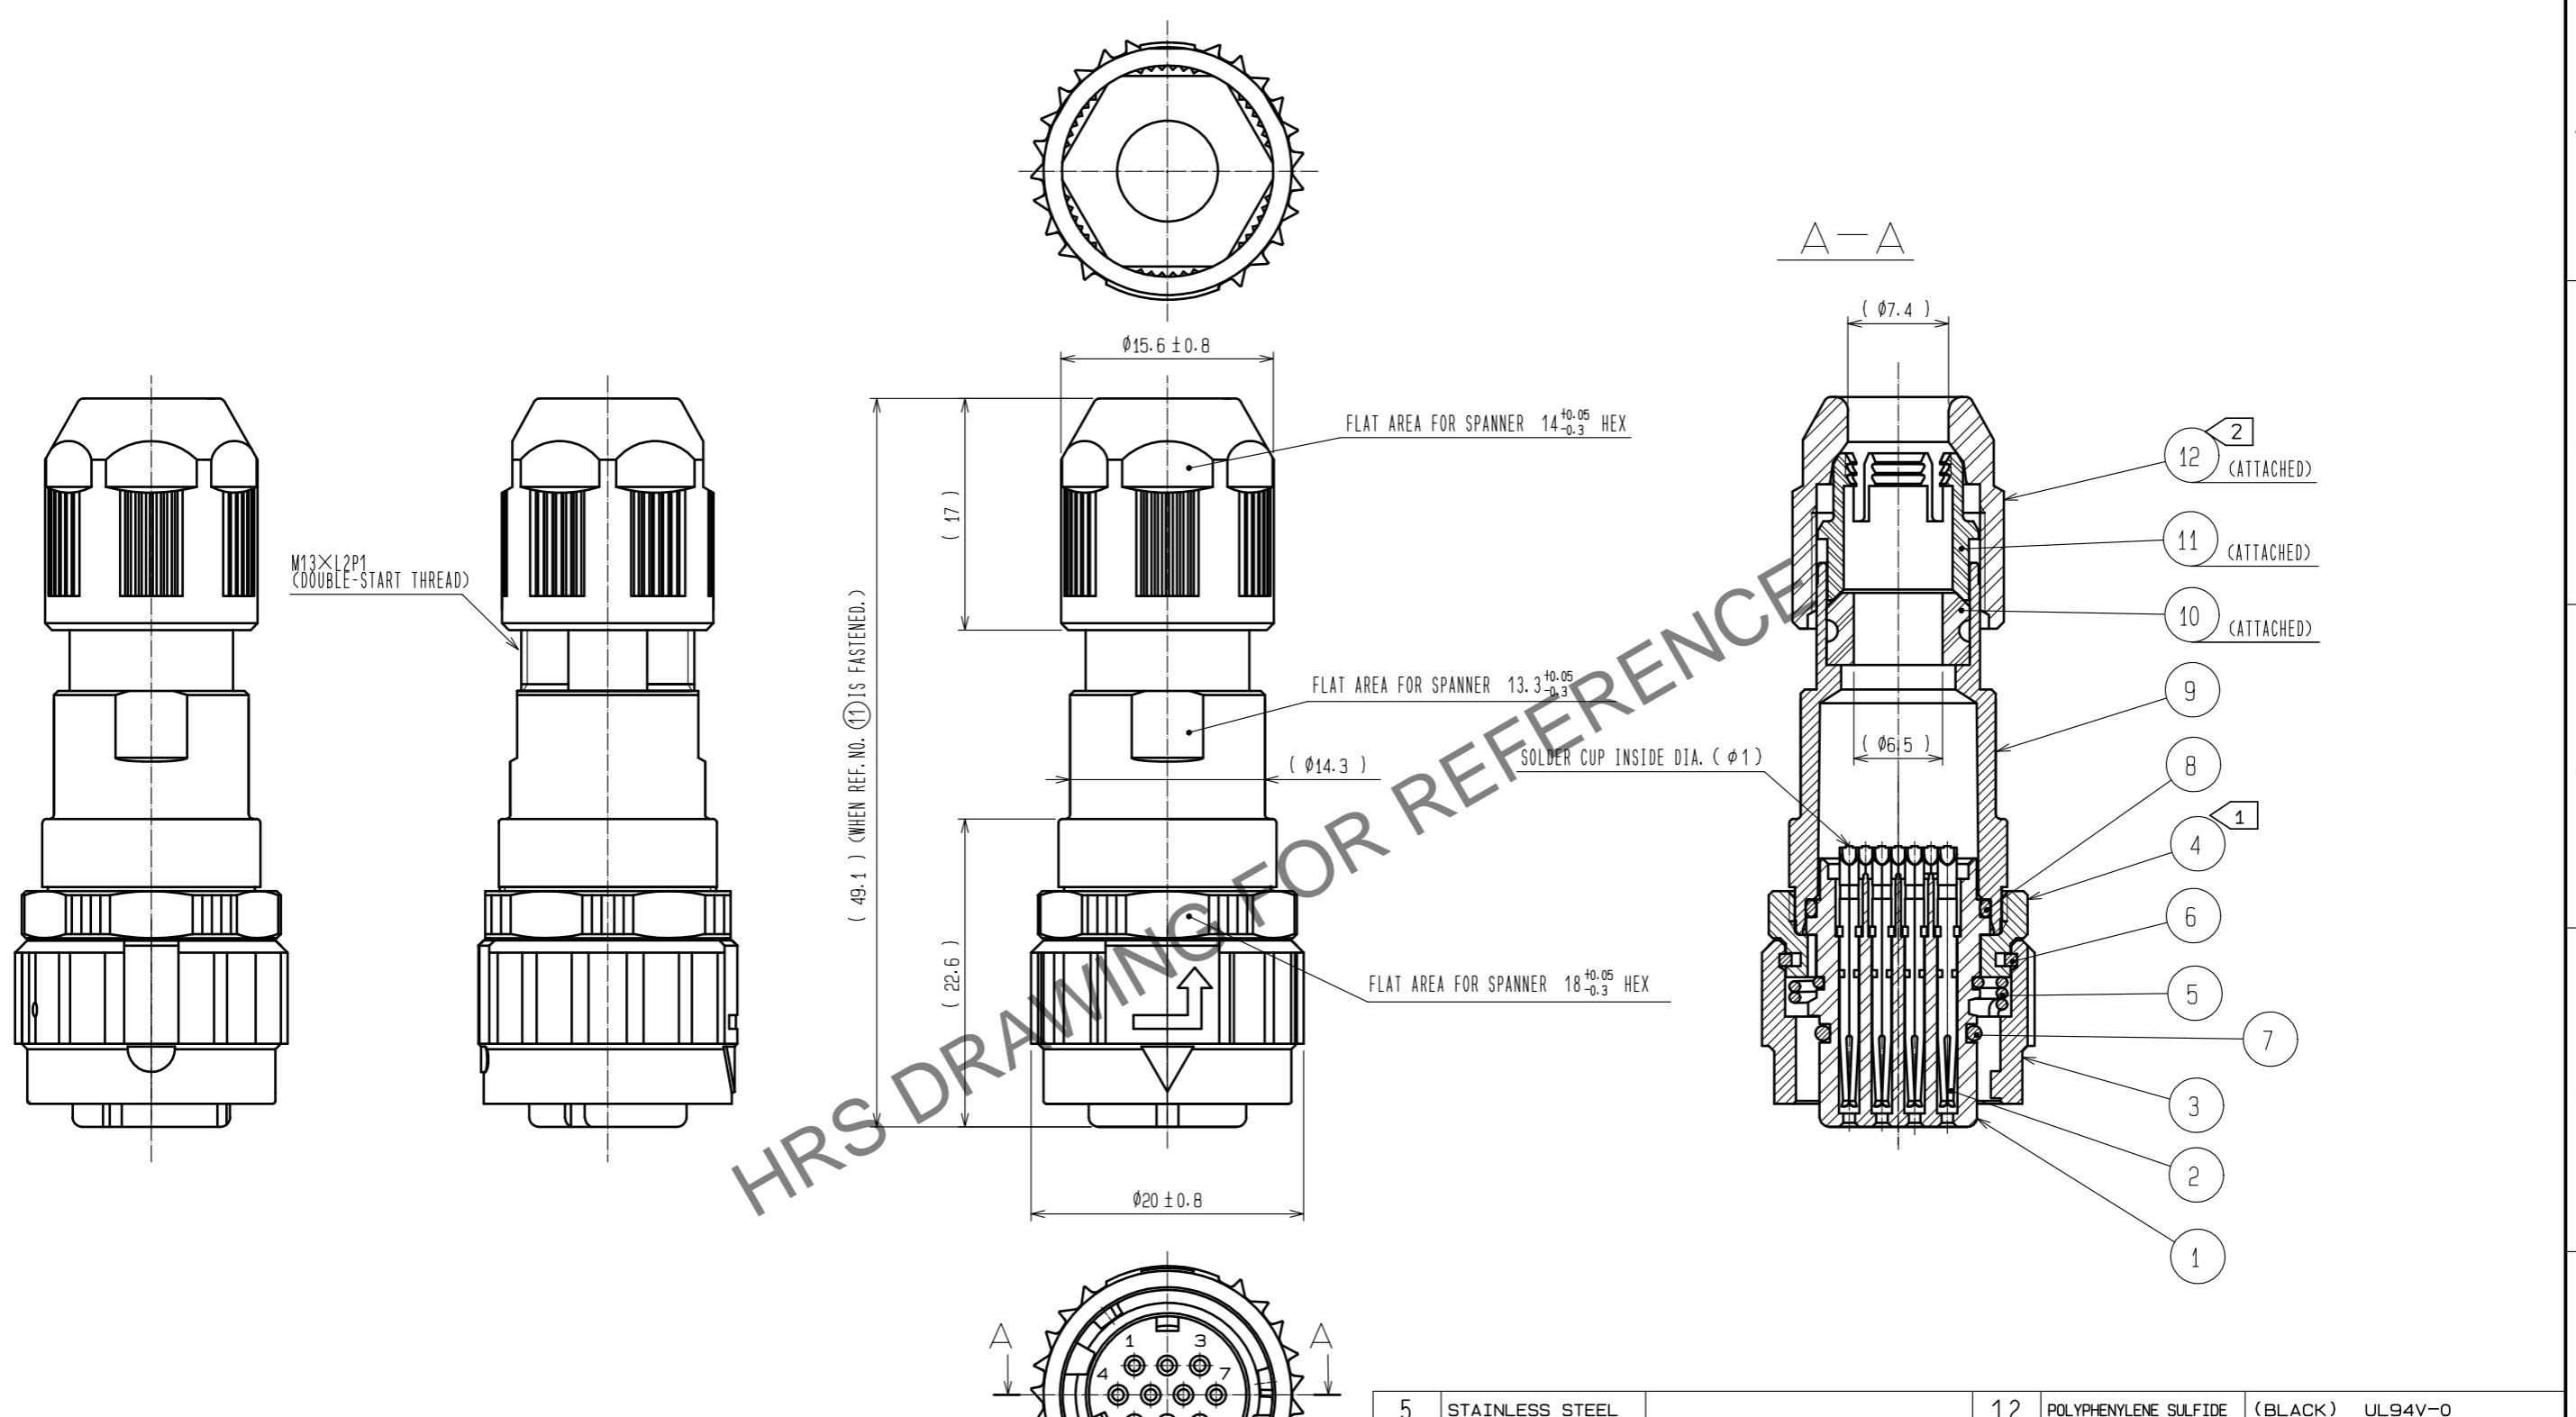

HRS DRAWING FOR REFERENCE

- NOTES
- ① THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ④: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE OF REF NO. ④: LOCTITE 243 MADE BY HENKEL JAPAN LTD.
 - ② THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ⑫: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF NO. ⑫: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ④, ⑨, AND ⑫.
 - ③ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE (BLACK) UL94V-0	
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE (WHITE) UL94V-0	
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER (BLACK)	
2	PHOSPHOR BRONZE	CONTACT AREA :GOLD 0.2μm min. TERMINAL AREA:GOLD FLASH. UNDER PLATING:NICKEL 2μm min.	9	ALUMINIUM ALLOY	NICKEL PLATING
1	POLYPHENYLENE SULFIDE (BLACK) UL94V-0		8	ACRYLONITRILE BUTADIENE RUBBER (BLACK)	
			7	ACRYLONITRILE BUTADIENE RUBBER (BLACK)	
			6	PHOSPHOR BRONZE	NICKEL PLATING

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△	APPROVED :HY. KOBAYASHI 18.02.26			
			CHECKED :HY. KOBAYASHI 18.02.26			
			DESIGNED :DS. MATSUNE 18.02.24			
			DRAWN :AI. NISHIYAMA 18.02.16			

DRAWING NO.	PART NO.	CODE NO.
EDC-115624-31-00	HR08D-12WPA-10S(31)	CL108-0219-7-31