


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

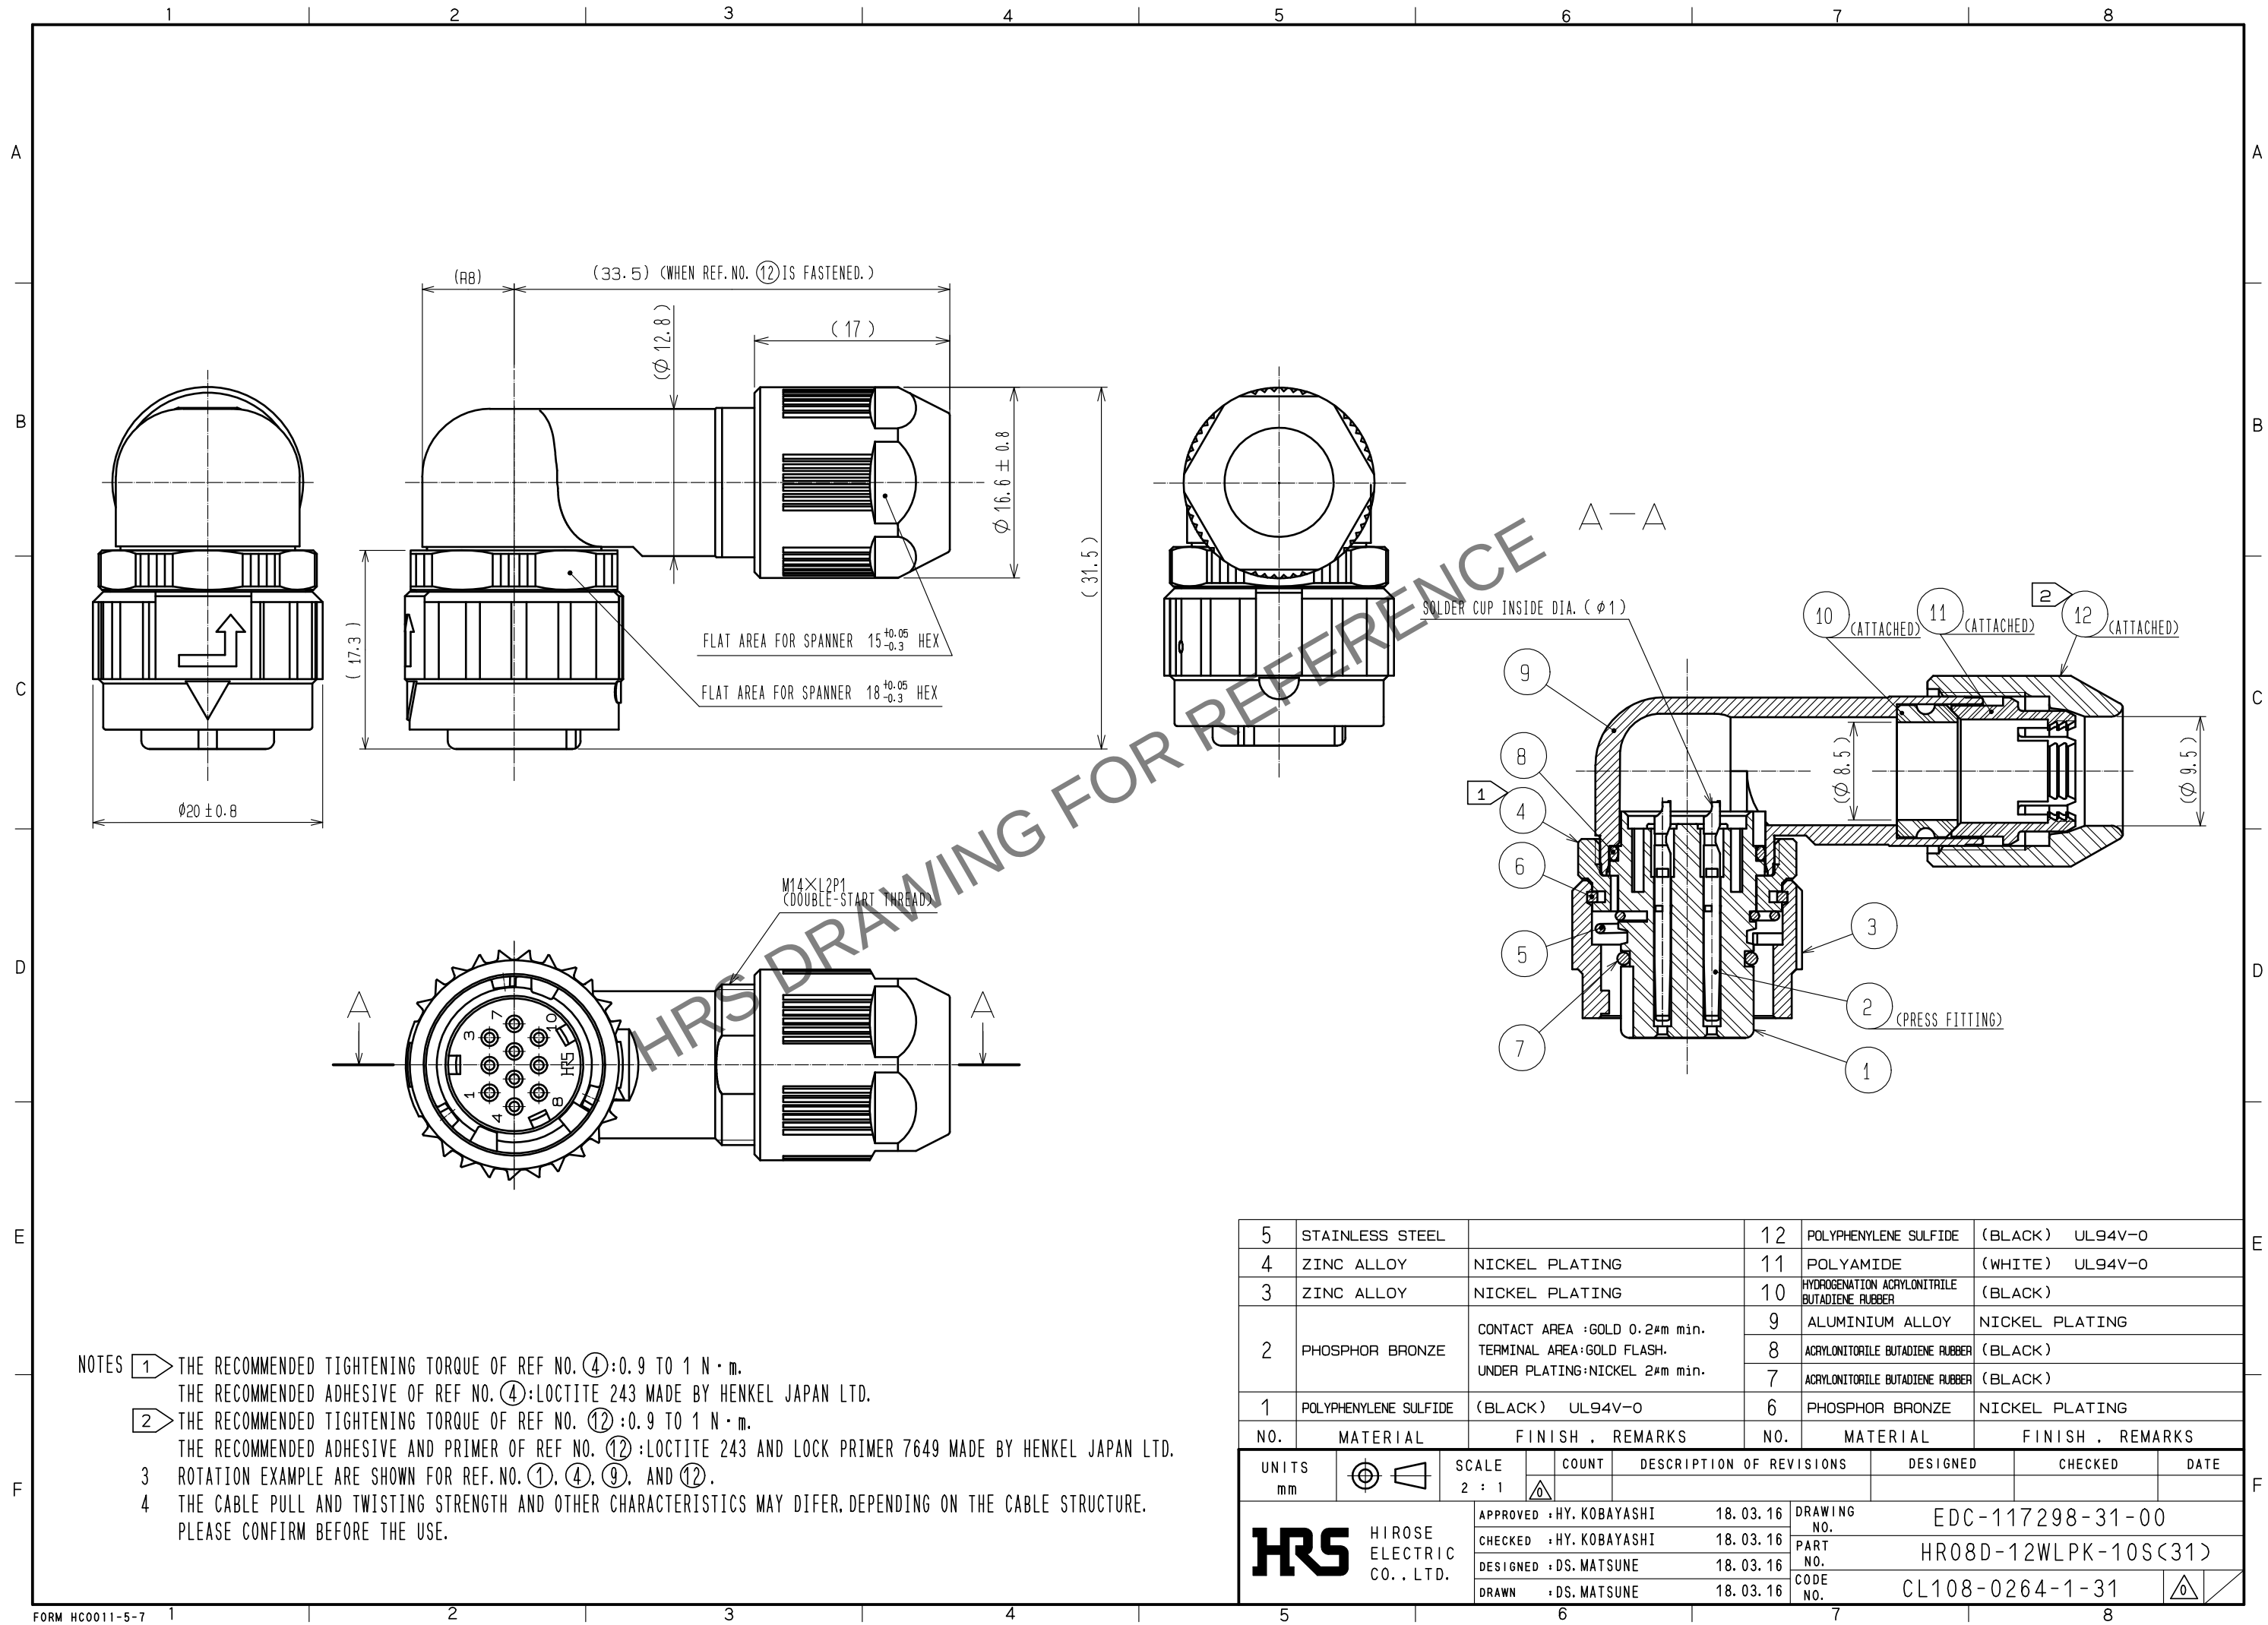

NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ④: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE OF REF NO. ④: LOCTITE 243 MADE BY HENKEL JAPAN LTD.
② THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ⑫: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF NO. ⑫: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
3 ROTATION EXAMPLE ARE SHOWN FOR REF. NO. ①, ④, ⑨, AND ⑫.
4 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE	(WHITE) UL94V-0
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
2	PHOSPHOR BRONZE	CONTACT AREA :GOLD 0.2μm min. TERMINAL AREA:GOLD FLASH. UNDER PLATING:NICKEL 2μm min.	9	ALUMINIUM ALLOY	NICKEL PLATING
1	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
			7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)
			6	PHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	18. 03. 16	DRAWING NO.	EDC-117298-31-00
		CHECKED : HY. KOBAYASHI	18. 03. 16	PART NO.	HR08D-12WLPK-10S(31)
		DESIGNED : DS. MATSUNE	18. 03. 16	CODE NO.	CL108-0264-1-31
		DRAWN : DS. MATSUNE	18. 03. 16		