
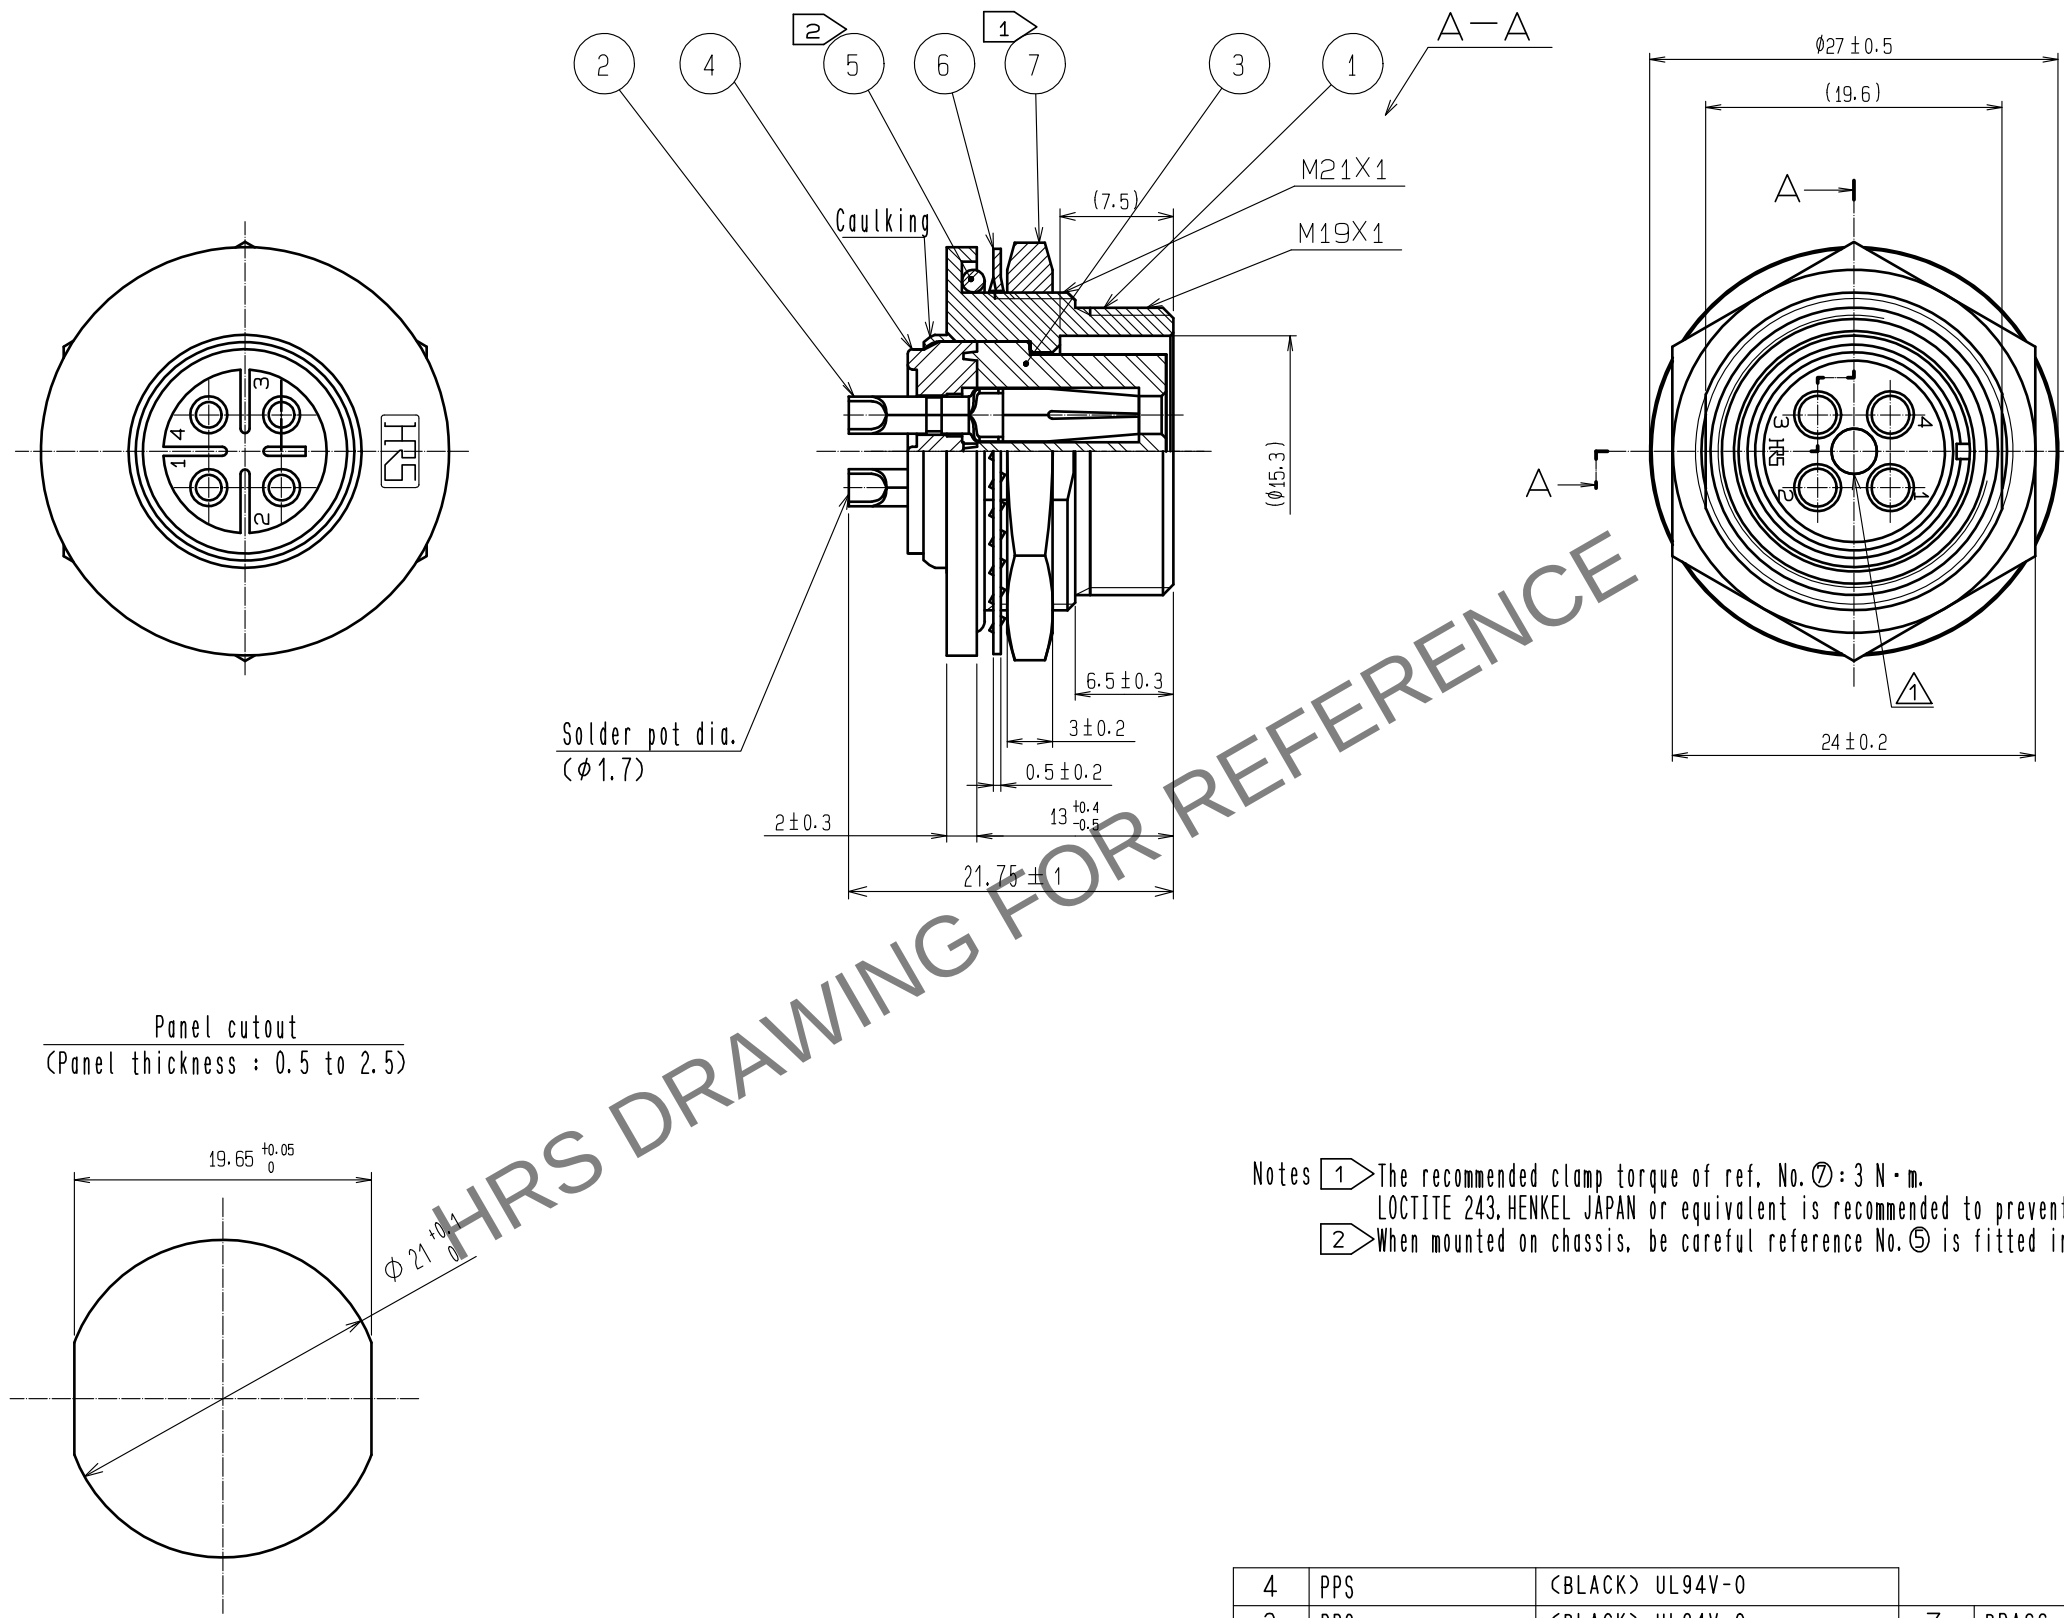


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



Notes ① The recommended clamp torque of ref. No. ⑦ : 3 N·m.
LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑦ from loosening.
② When mounted on chassis, be careful reference No. ⑤ is fitted into the indicates groove any biting.

4	PPS	(BLACK) UL94V-0									
3	PPS	(BLACK) UL94V-0		7	BRASS	NICKEL PLATING					
2	COPPER ALLOY	SURFACE : GOLD PLATING 0.2 μm min. UNDER : NICKEL PLATING 3 μm min.		6	PHOSPHOR BRONZE	NICKEL PLATING					
1	ZINC ALLOY	CHROME PLATING		5	SILICONE RUBBER	(BLACK)					
NO. MATERIAL FINISH , REMARKS NO. MATERIAL FINISH , REMARKS											
UNITS mm											
											
SCALE 2 : 1		COUNT  1		DESCRIPTION OF REVISIONS DIS-C-00000841		DESIGNED KN. IKEHARA		CHECKED HY. KOBAYASHI		DATE 16. 03. 02	
 HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI		15. 11. 06		DRAWING NO.		EDC-111089-82-00			
		CHECKED : HY. KOBAYASHI		15. 11. 06		PART NO.		RM15WTRZA-4S(82)			
		DESIGNED : KN. IKEHARA		15. 11. 06		CODE NO.		CL109-1659-1-82			
		DRAWN : KN. IKEHARA		15. 11. 06				 			