
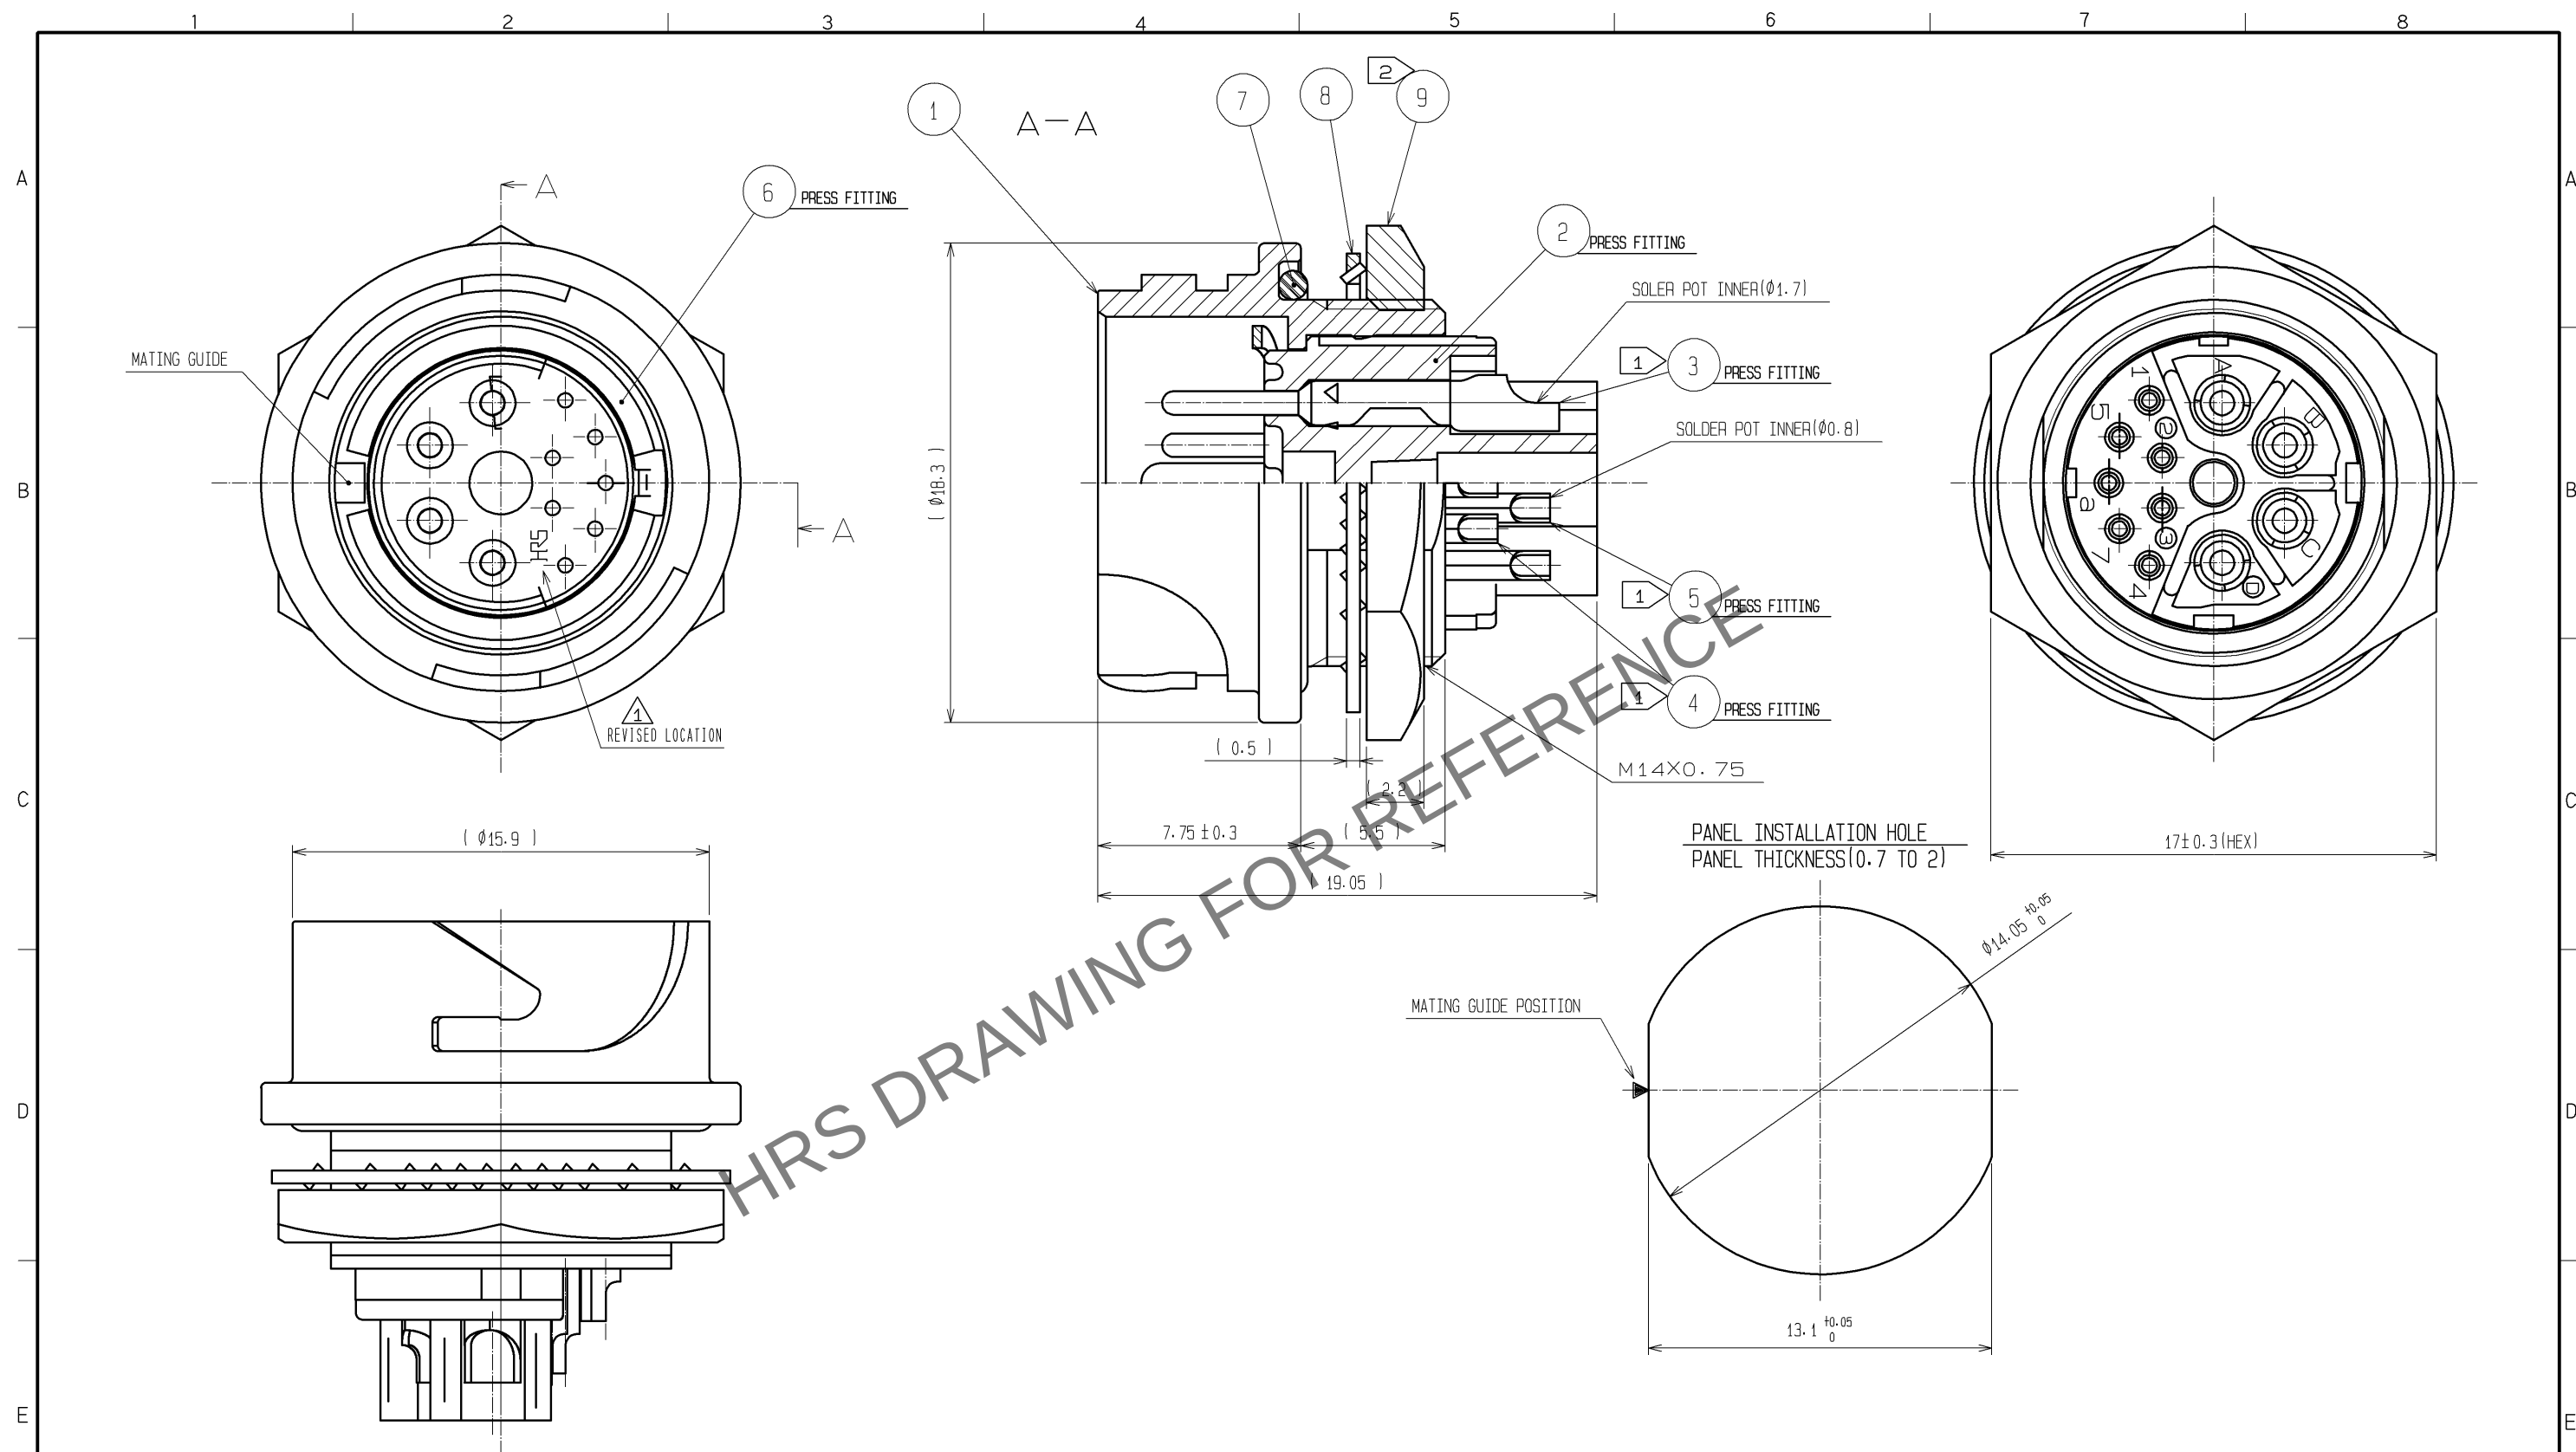




- NOTES
- ① PLATING(REF.NO.③, ④, ⑤)
CONTACT AREA : GOLD 0.2μm min.
OTHERS : GOLD AND NICKEL
UNDER PLATING : NICKEL 2μm min.
 - ② THE RECOMMENDED CLAMP TORQUE OF REF.NO.⑥ TO BE 2 TO 2.5N·m.
THREAD LOCKER TO THE THREADED PORTION OF REF.NO.⑥ IS RECOMMENDED TO PREVENT REF.NO.⑥ FROM LOOSING.
RECOMMENDED THREAD LOCKER:LOCTITE 271, HENKEL JAPAN LTD.
 - ③ WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL, BE CAREFUL REF.NO.⑦ IS ASSEMBLED SURELY INTO THE GROOVE OF REF.NO.⑦ AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.

5	COPPER ALLOY	1					
4	COPPER ALLOY	1		9	BRASS	NICKEL PLATING	
3	COPPER ALLOY	1		8	PHOSPHOR BRONZE	NICKEL PLATING	
2	PPS	(BLACK)	UL94V-0	7	CHLOROPRENE RUBBER	(BLACK)	
1	ZINC ALLOY	NICKEL PLATING		6	PHOSPHOR BRONZE	NICKEL PLATING	
部番	材 質	処 理 , 備 考		部番	材 質	処 理 , 備 考	

UNITS mm		SCALE		△の数	訂 正 記 事		設 計	検 図	年月日
		4 : 1		1	DIS-C-000768		DS. MATSUNE	YH. YAMADA	08. 01. 08
 HIROSE ELECTRIC CO., LTD.		承 認 : MR. YOSHIDA		05. 01. 05	図番 : EDC3-114400-00				
		検 図 : MO. SATOH		05. 01. 05	製品名 : LF13WBR-11P				
		設 計 : YH. YAMADA		05. 01. 05	製品コード : CL136-1011-0-00				
		製 図 : YH. YAMADA		05. 01. 05	 				