


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

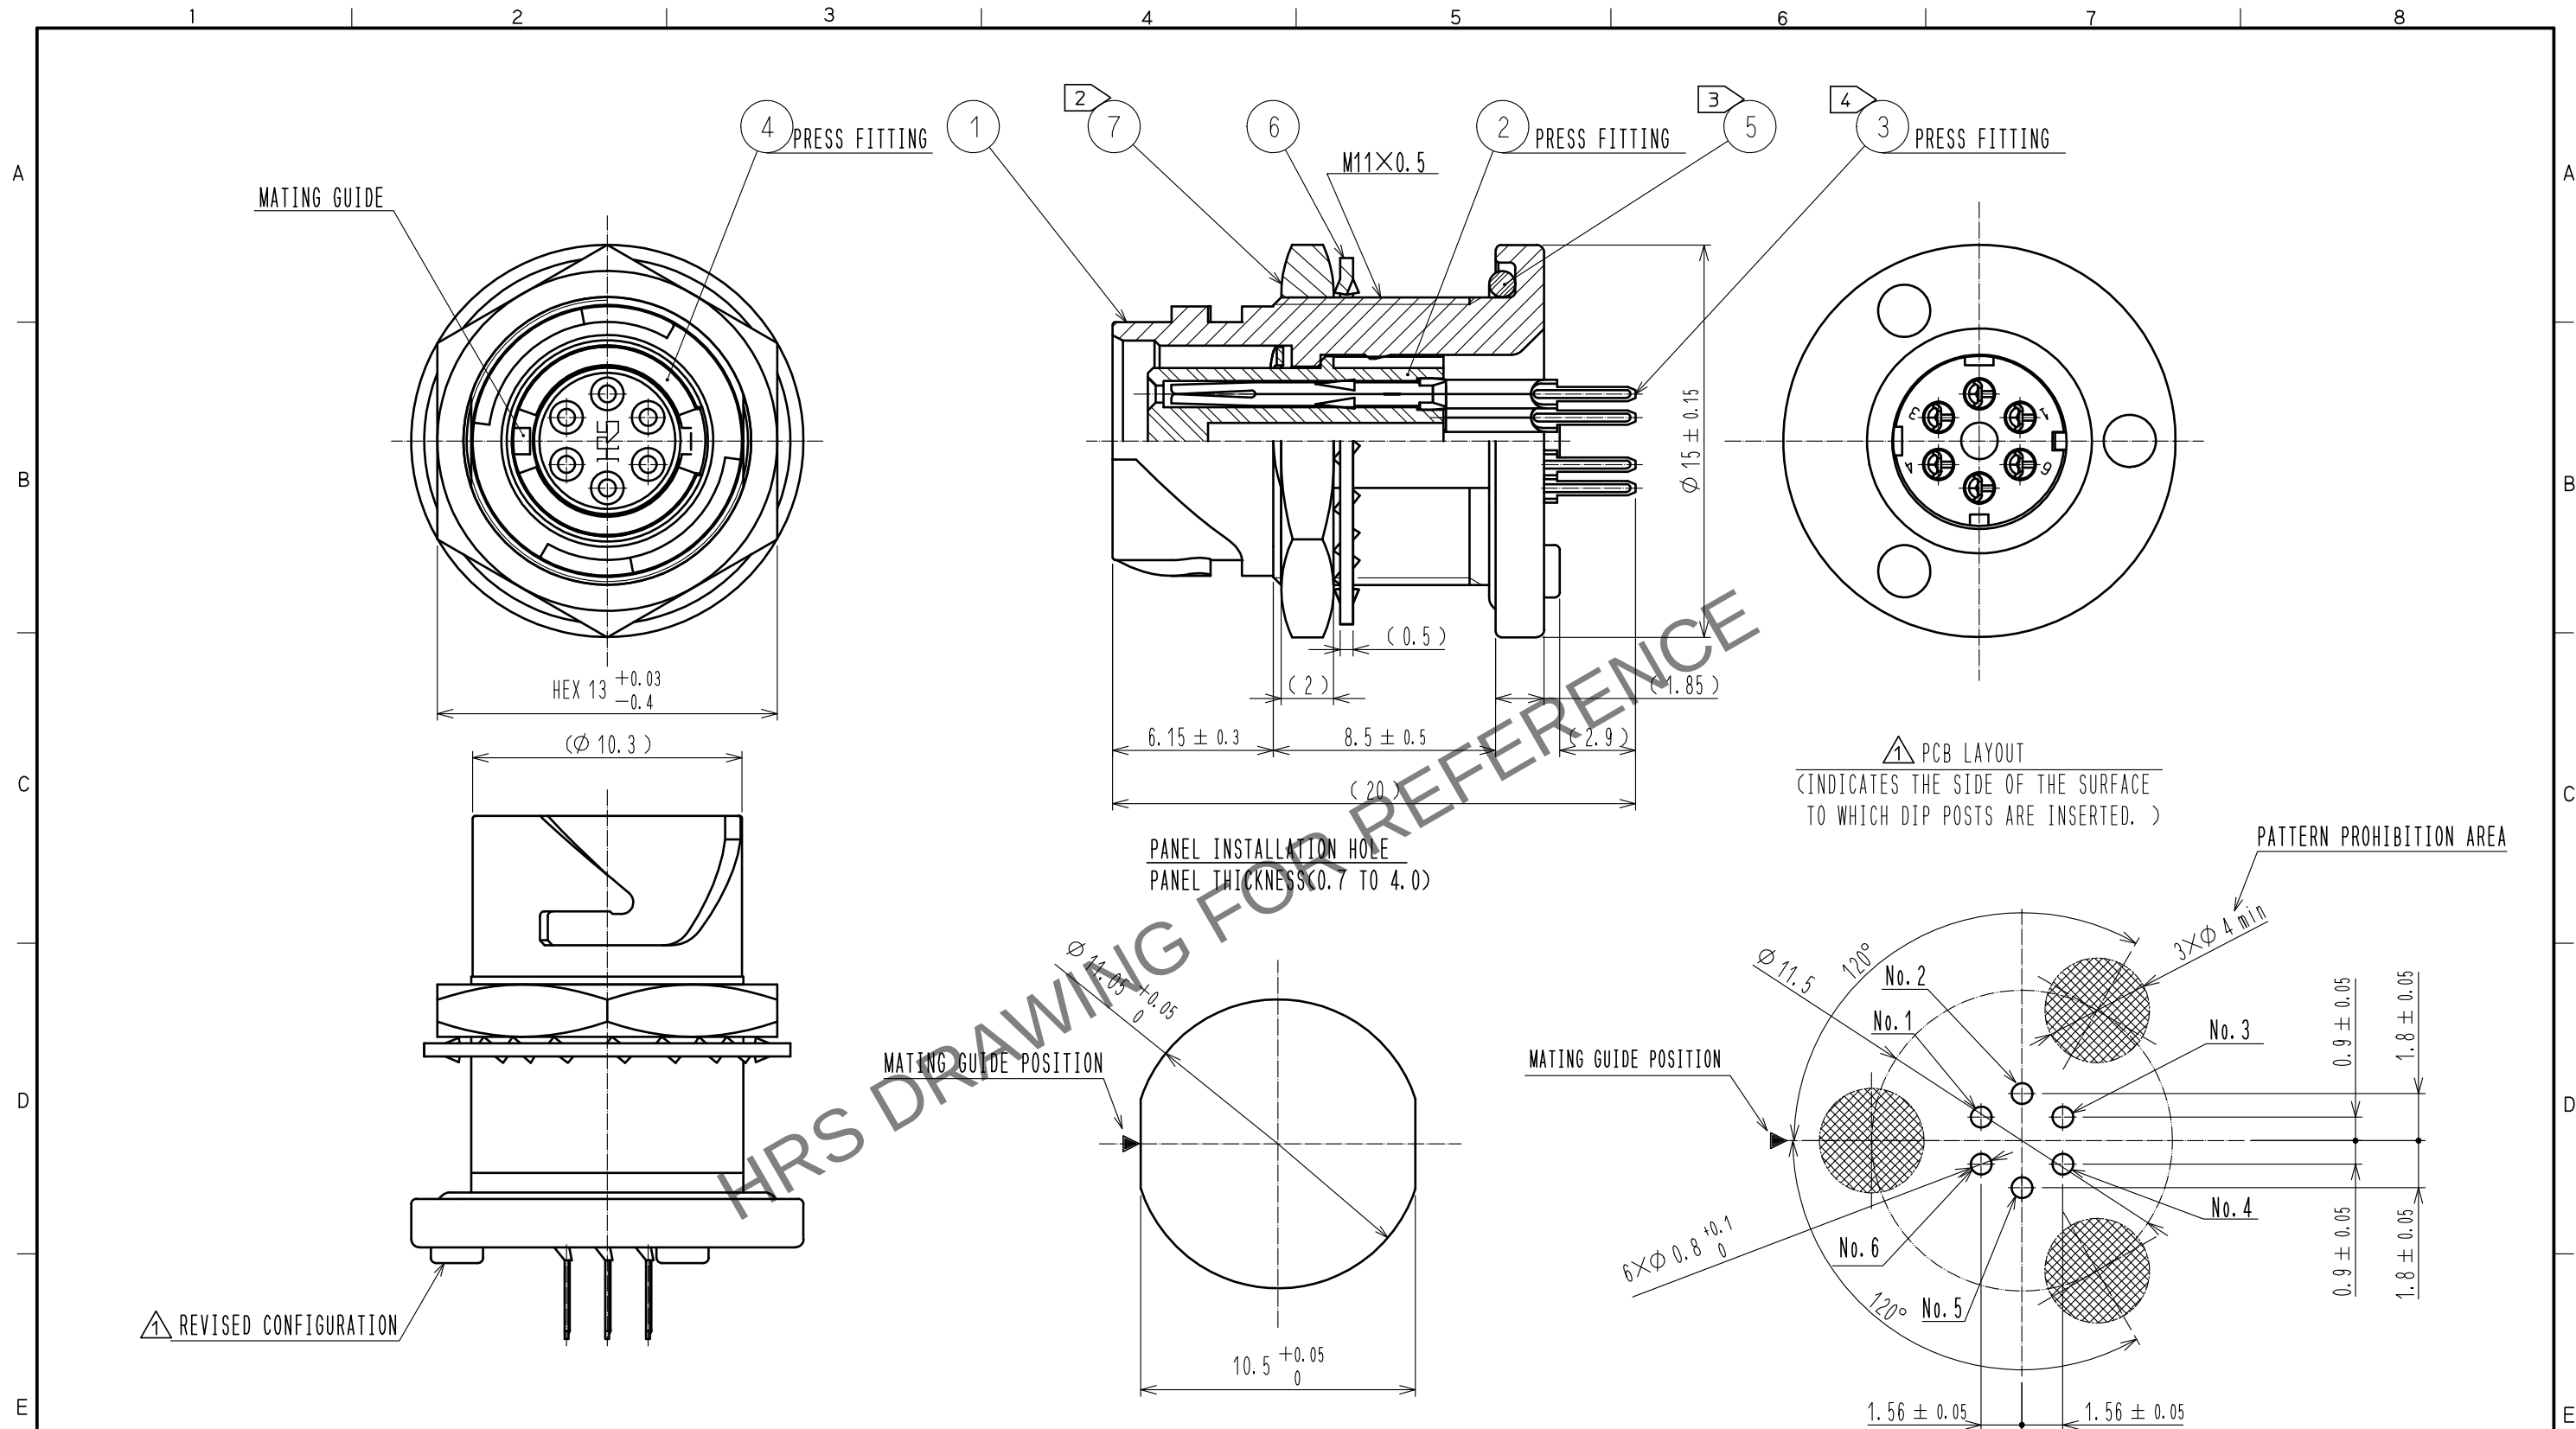

- NOTES
- PLATING(REF. NO. ③)
CONTACT AREA :GOLD 0.2 μ m min.
DIP AREA :GOLD 0.03 μ m min.
UNDER PLATING:NICKEL PLATING 2 μ m min.
 - THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ TO BE 1.5 TO 2 N·m.
THREAD LOCKER TO THREADED PORTION OF REF. NO. ① IS RECOMMENDED TO PREVENT REF. NO. ⑦ FROM LOOSING.
RECOMMENDED THREAD LOCKER:LOCTITE 263 , HENKEL JAPAN LTD.
 - WHEN THIS CONNECTOR IS MOUNTED ON TO PANEL,BE CAREFUL REF. NO. ⑤ IS ASSEMBLED SURELY INTO THE GROOVE OF REF. NO. ⑤ AS SHOWN IN THIS FIGURE TO KEEP WATERPROOF EFFECTIVENESS.
 - ROTATION EXAMPLE OF REF. NO. ③ ARE SHOWN.

4	PHOSPHOR BRONZE	NICKEL PLATING			
3	PHOSPHOR BRONZE	①	7	BRASS	NICKEL PLATING
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	NICKEL PLATING	5	CHLOROPRENE RUBBER	(BLACK)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 4 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00002307	DESIGNED SY. KONDO
		APPROVED : HY. KOBAYASHI	18. 02. 22	DRAWING NO.	EDC-119580-31-00
		CHECKED : HY. KOBAYASHI	18. 02. 22	PART NO.	LF07WBRB-6SD(31)
		DESIGNED : TY. SUZUKI	18. 02. 22	CODE NO.	CL136-1026-0-31
		DRAWN : HM. SAITO	18. 02. 20		
				DATE	18. 06. 20
				CHECKED	EJ. KUNII