


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

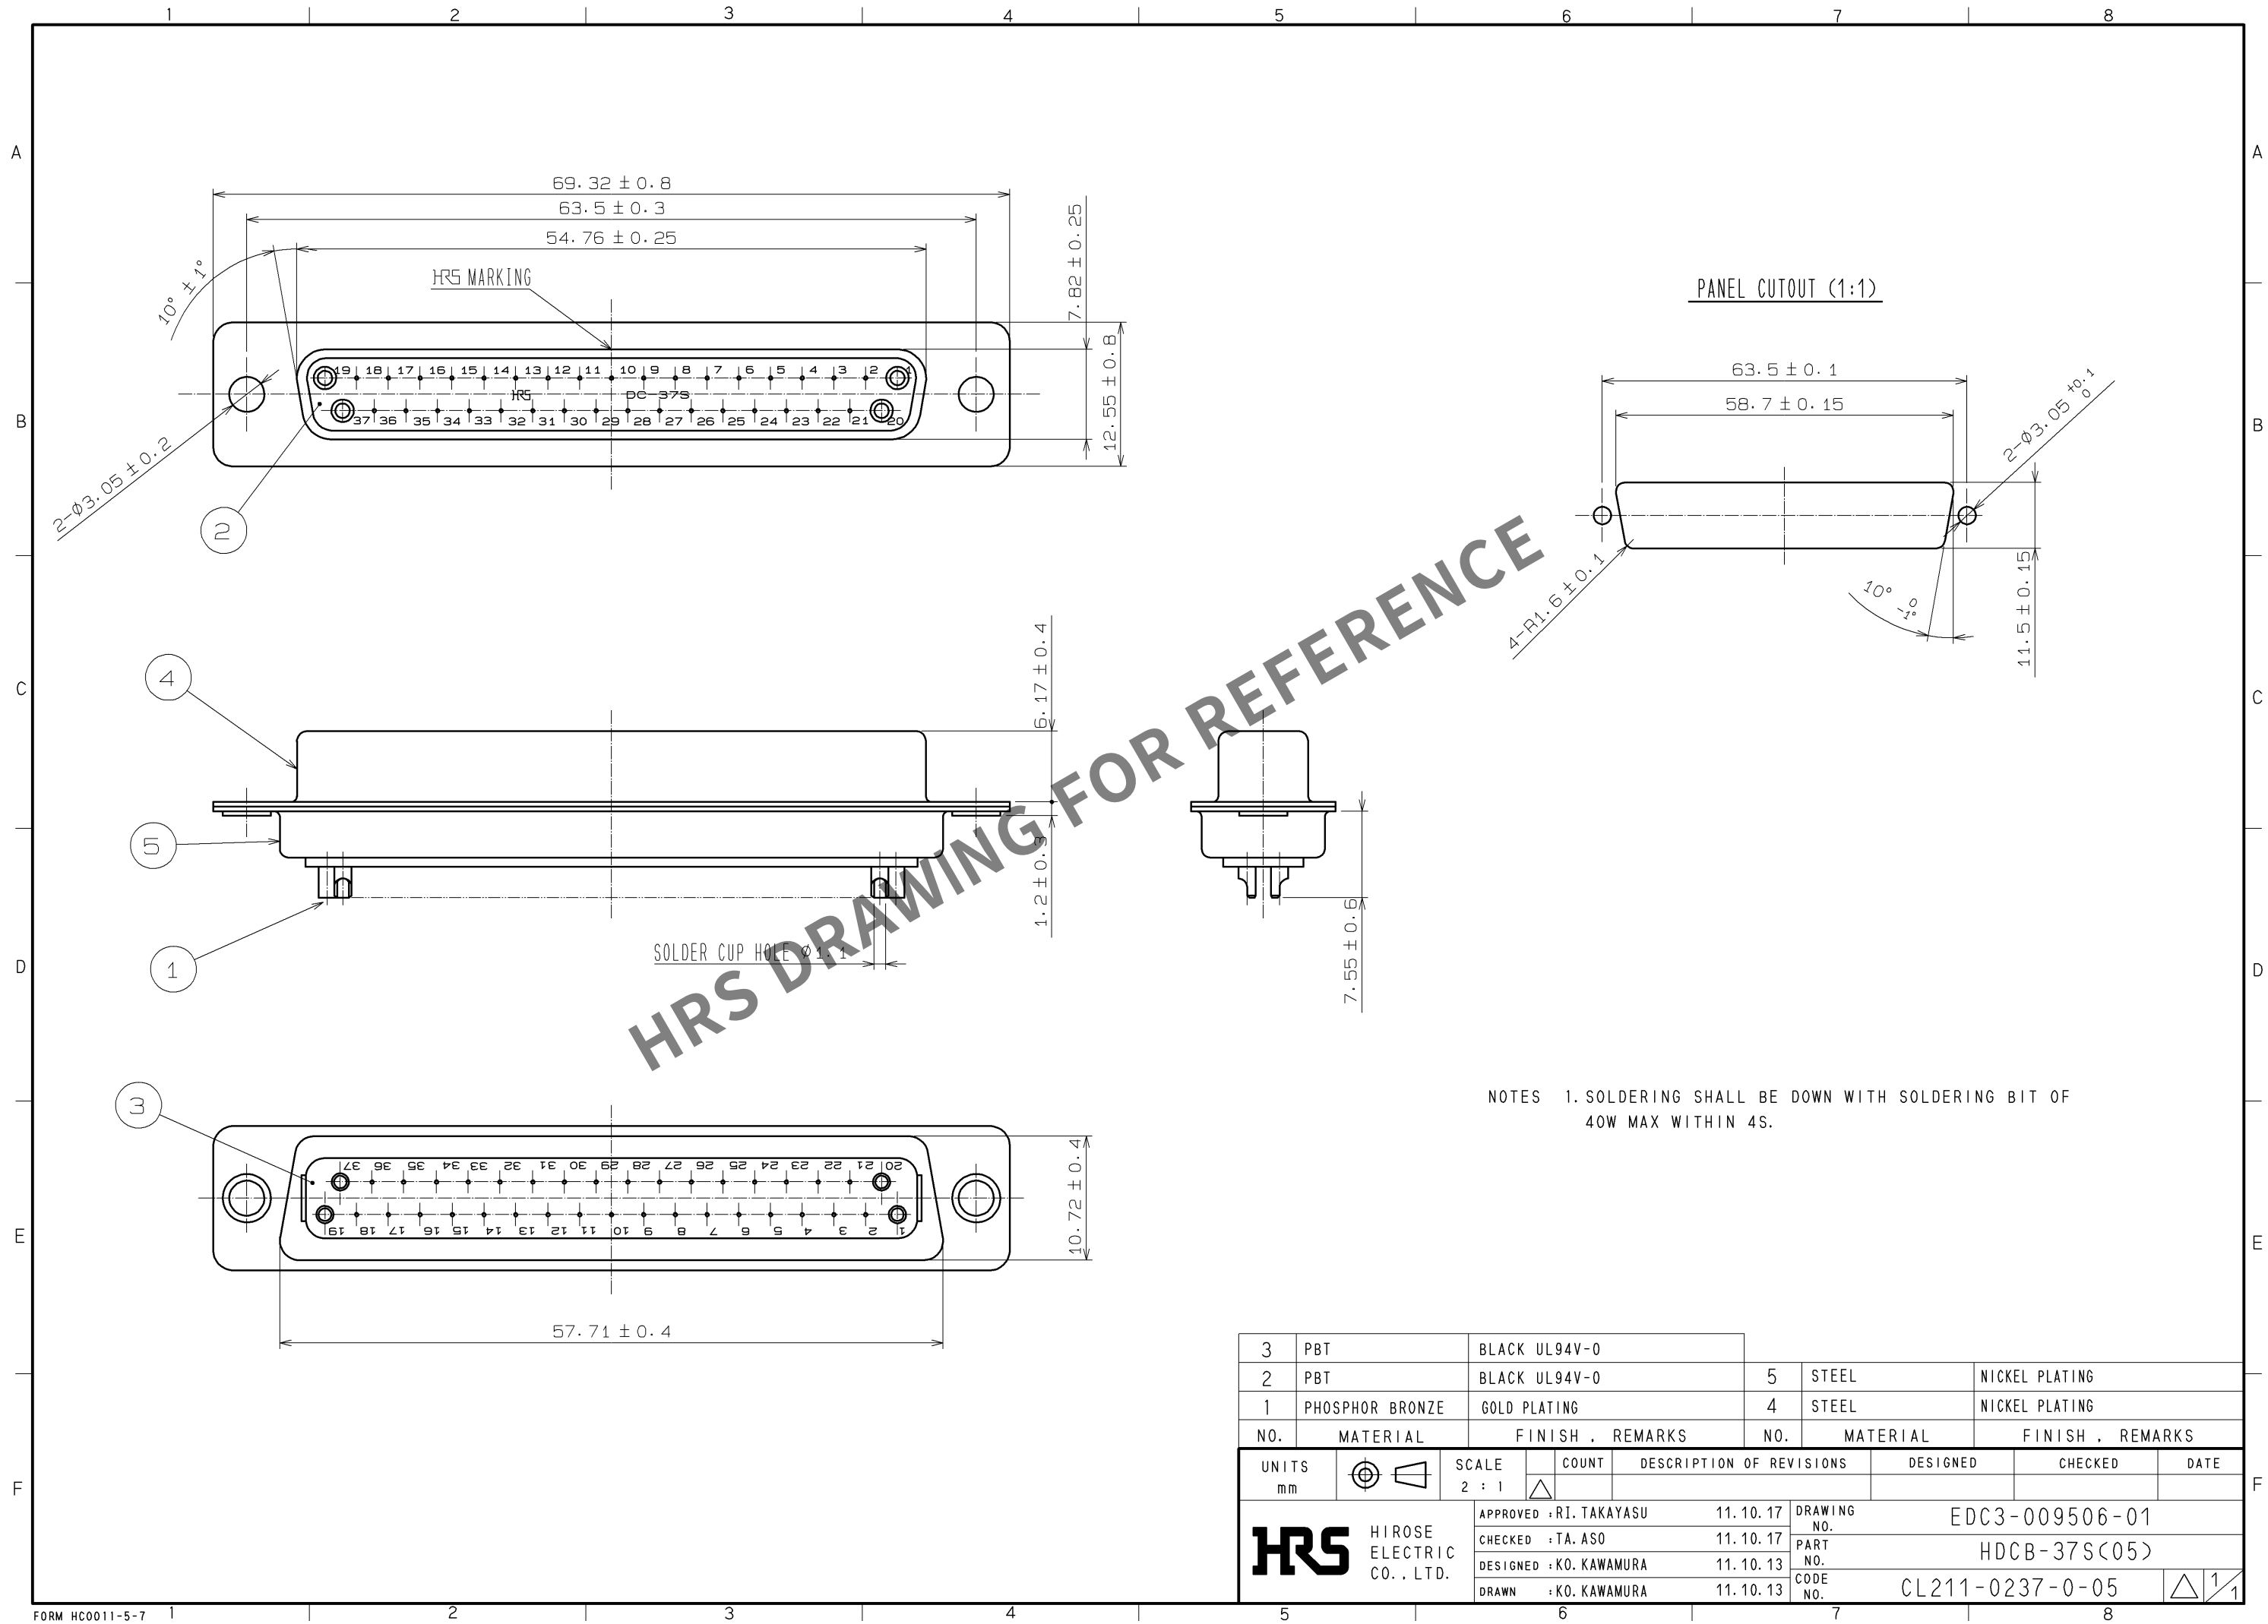

NOTES 1. SOLDERING SHALL BE DOWN WITH SOLDERING BIT OF 40W MAX WITHIN 4S.

3	PBT	BLACK UL94V-0			
2	PBT	BLACK UL94V-0	5	STEEL	NICKEL PLATING
1	PHOSPHOR BRONZE	GOLD PLATING	4	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	11.10.17	DRAWING NO.	EDC3-009506-01
		CHECKED : TA. ASO	11.10.17	PART NO.	HDCB-37S(05)
		DESIGNED : KO. KAWAMURA	11.10.13	CODE NO.	CL211-0237-0-05
		DRAWN : KO. KAWAMURA	11.10.13		1/1