


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

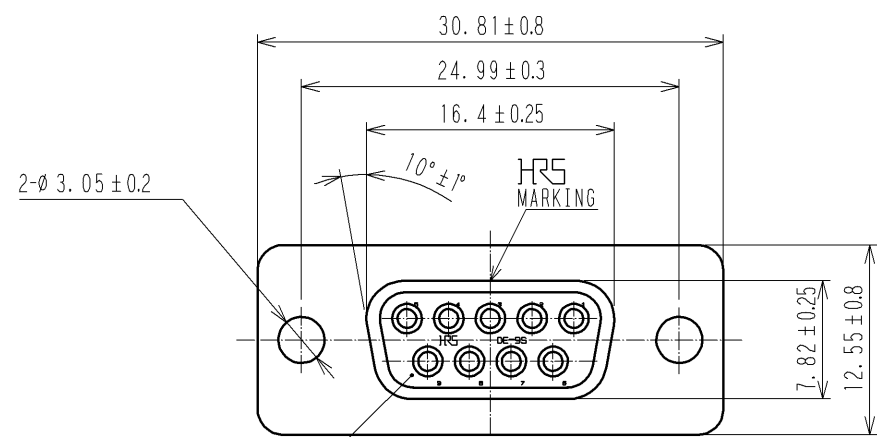


2

4

5

1

3

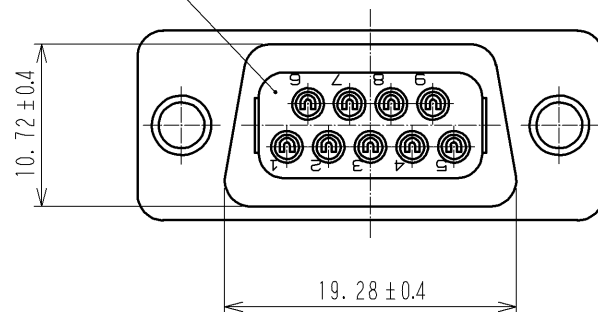


6.17±0.4


1.2±0.3


0.64±0.1

4.05±0.1

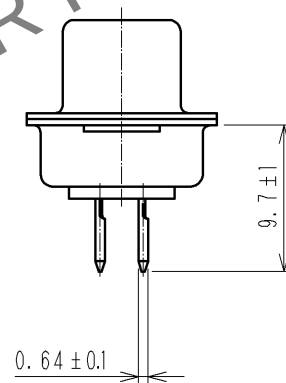

RECOMMENDED PC BOARD HOLE PATTERN (MOUNTING SIDE)

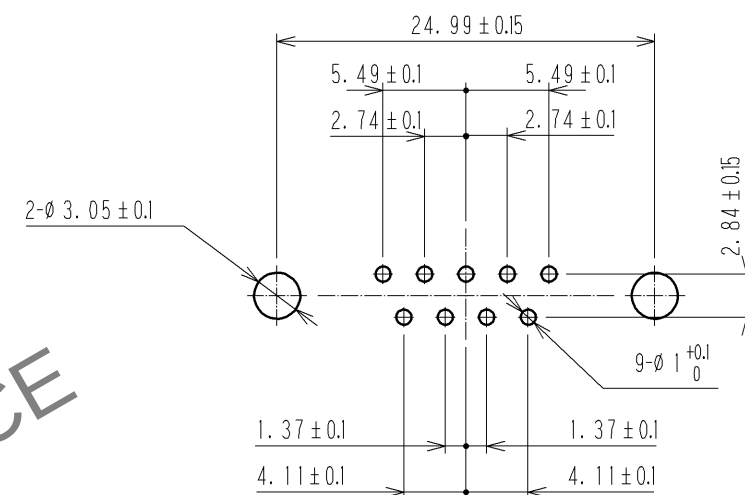

3	PBT	(BLACK)UL94V-0							
2	PBT	(BLACK)UL94V-0		5	STEEL	OVER: Ni 2μm min UNDER:Cu 5μm min			
1	PHOSPHOR BRONZE	CONTACT: Au 0.2μm min LEAD: Au 0.03μm min UNDER: Ni 2μm min				4	STEEL	OVER: Ni 1μm min UNDER:Cu 5μm min	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL			FINISH . REMARKS	
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : YH. ENAMI		09.08.08	DRAWING NO.		EDC3-009835-02		
		CHECED : YH. ENAMI		09.08.08	PART NO.		SDEB-9S(55)		
		DESIGNED : KI. NAGANUMA		09.08.08	CODE NO.		CL211-0248-6-55		
		DRAWN : KI. NAGANUMA		09.08.08					
									