
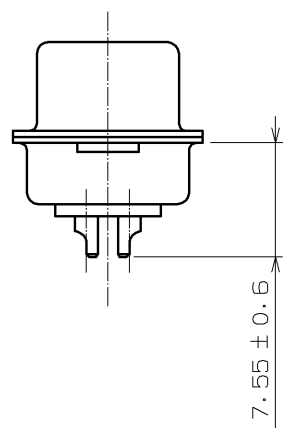
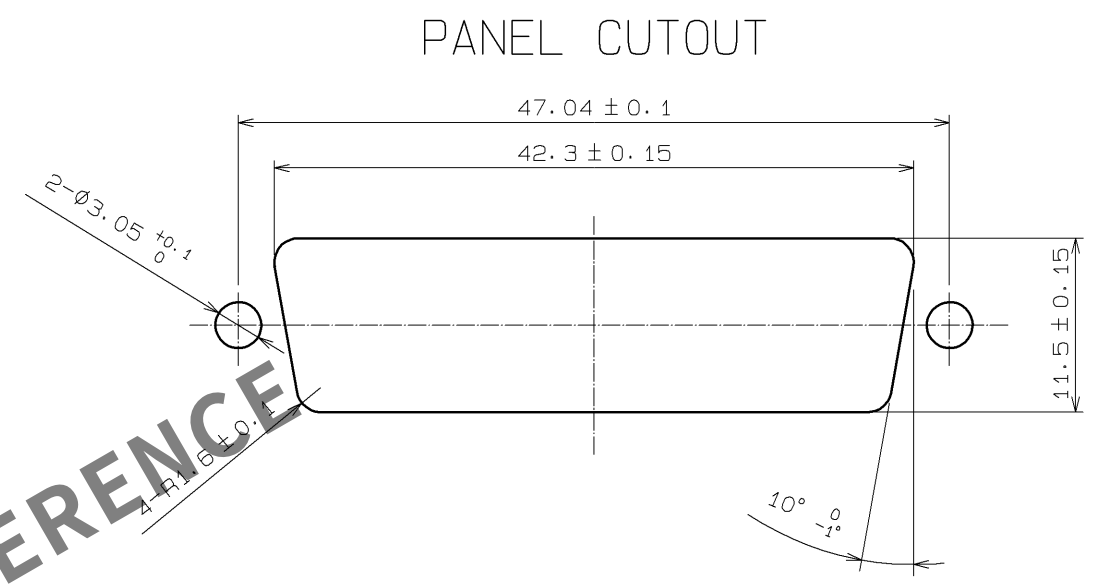
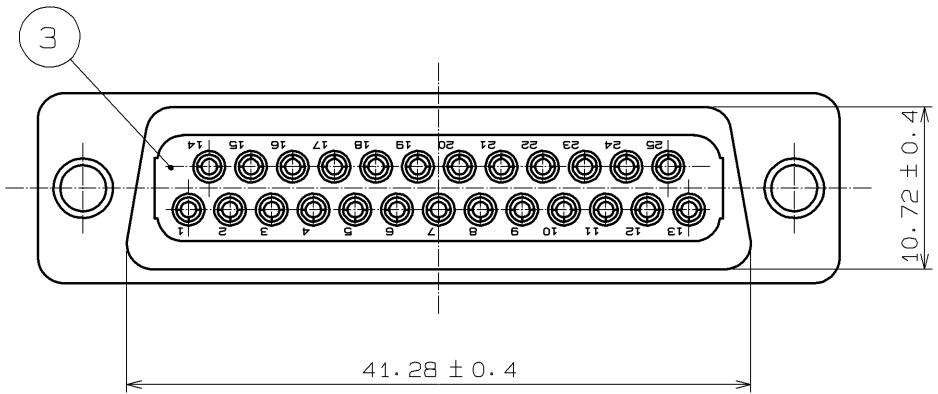
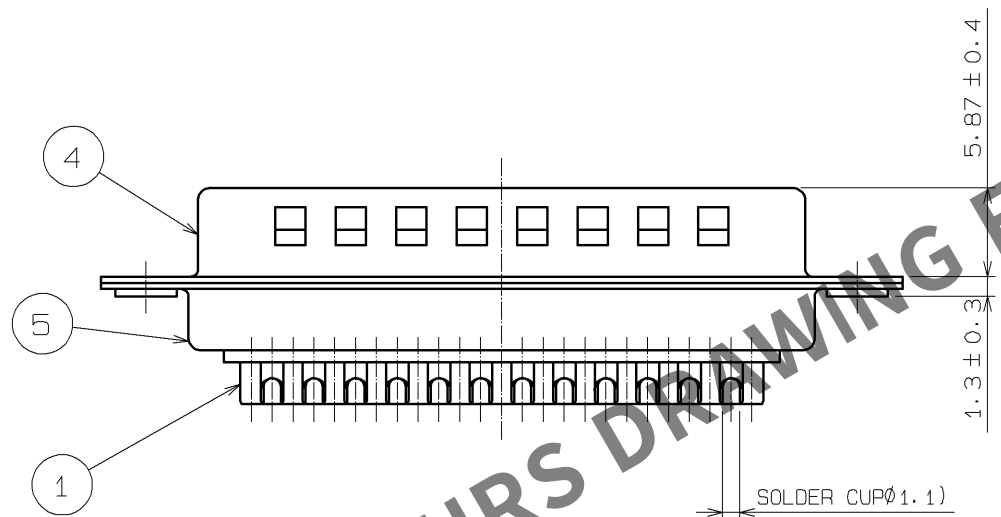


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

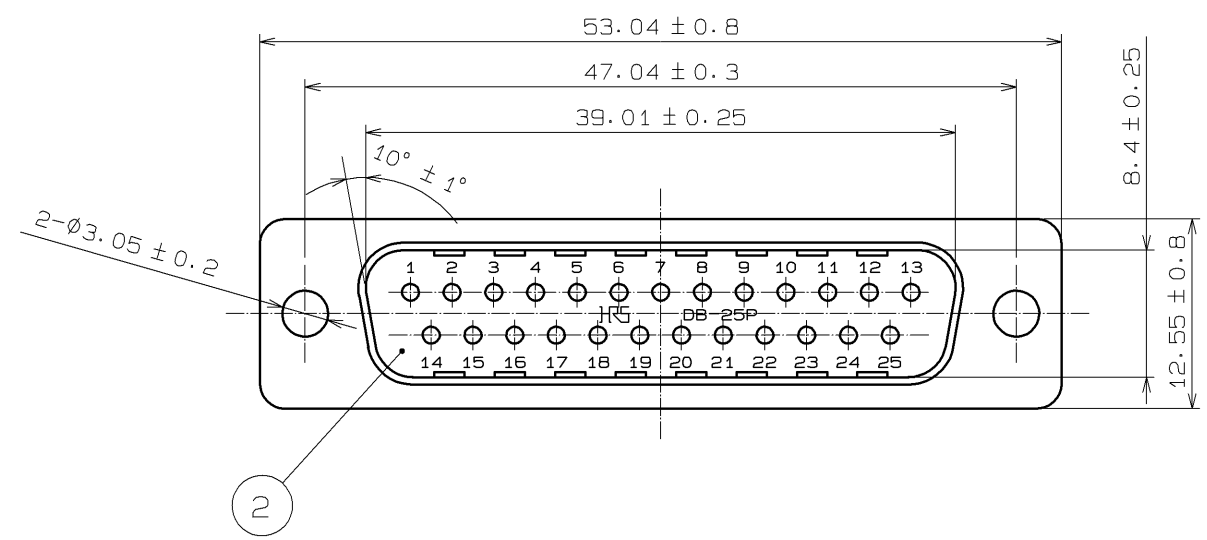

NOTE 1. SOLDERING SHALL BE DOWN WITH SOLDERING BIT OF 40W MAX WITHIN 4s.
2. CONTACT AREA: GOLD PLATING 0.2μm MIN
TERMINAL AREA: GOLD PLATING 0.03μm MIN
UNDER PLATING: NICKEL PLATING 1μm MIN

3	PBT	UL94V-0 BLACK	5	STEEL	SURFACE PLATING : NICKEL 2μm min. UNDER PLATING : COPPER 5μm min.		
2	PBT	UL94V-0 BLACK					
1	PHOSPHOR BRONZE	2					
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.			APPROVED : YH. ENAMI	09.01.29	DRAWING NO. EDC3-022424-01		
			CHECED : HO. MIWA	09.01.29	PART NO. HDBB-25PF(05)		
			DESIGNED : YH. MAMADA	09.01.28	CODE NO. CL211-0564-6-05		
			DRAWN : YH. MAMADA	09.01.28	△ 1 1		