


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

RECOMMENDED PC BOARD HOLE PATTERN
(SCALE 1/1)

4 PANEL CUT OUT DIMENTIONS(REFERENCE)

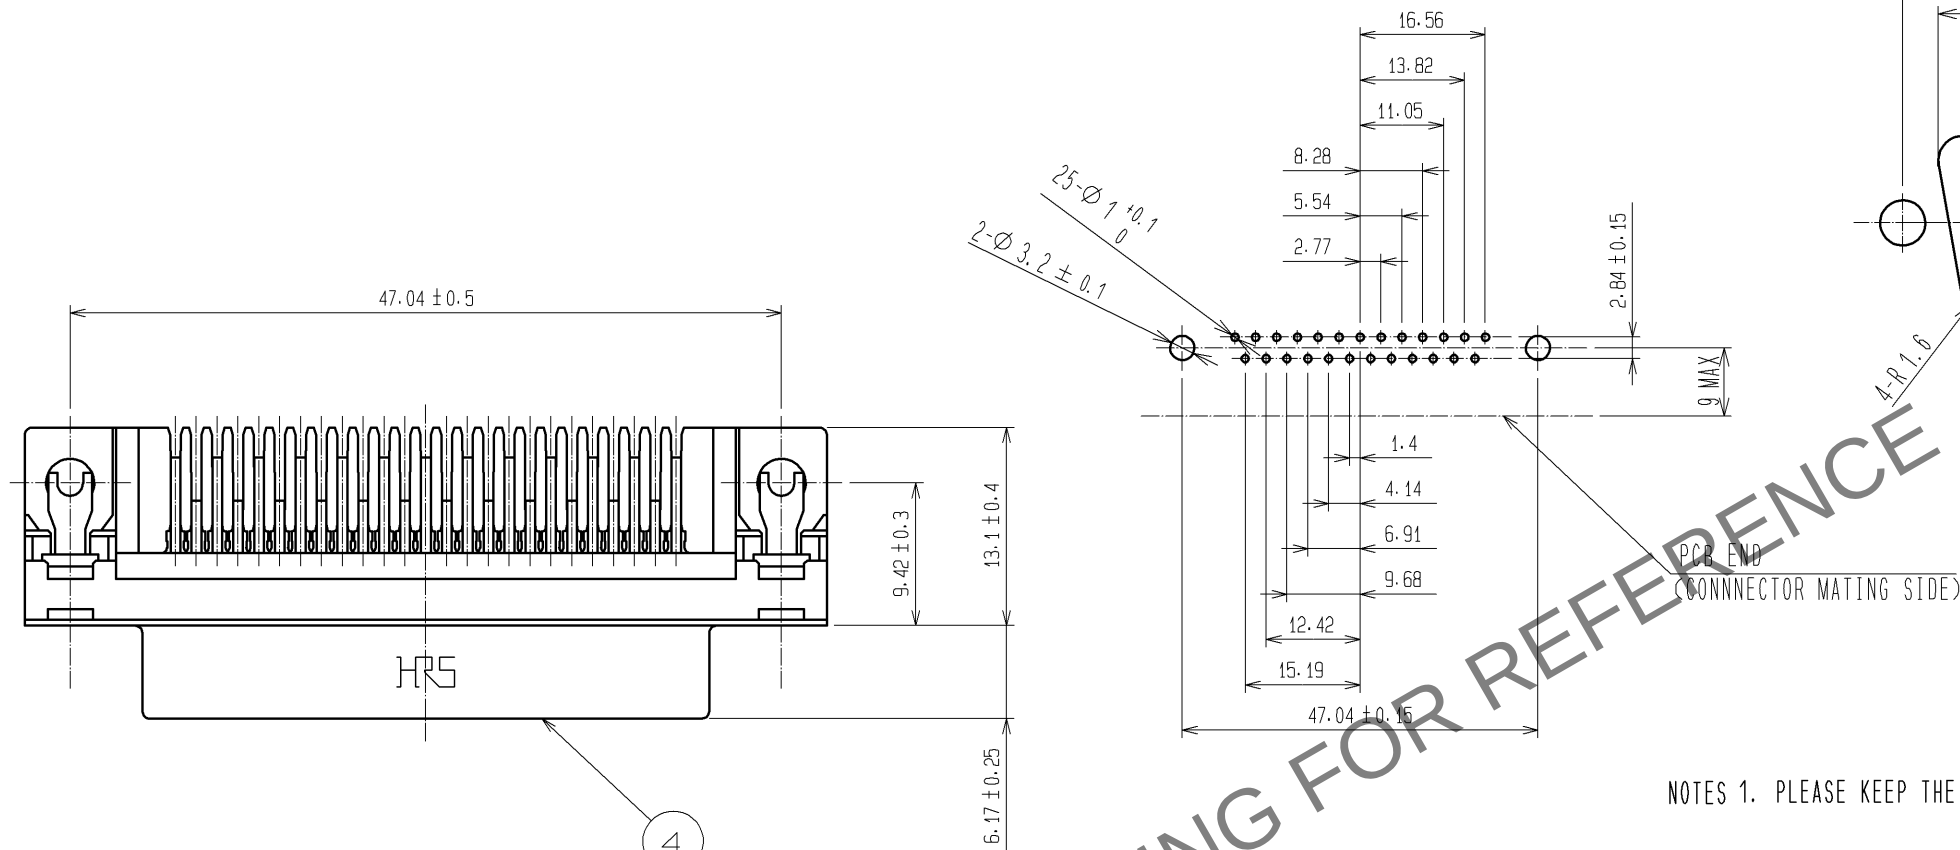

NOTES 1. PLEASE KEEP THE TOLERANCE TO LESS THAN ± 0.1 FOR THE DIMENTIONS WITHOUT TOLERANCE.

2. THICKNESS OF PC BOARD SHALL BE 1.6mm.

3. REF. NO. ③ AND ④ SHALL BE TEMPORARILY.
REF. NO. ③ AND ⑤ SHALL BE TEMPORARILY.

4 ATTACH THE PRODUCT TO A PANEL WITH SEPARATELY AVAILABLE LOCK SCREW FOR USE.

PART NUMBER	FEMALE SCREW SIZE	THICKNESS OF APPLICABLE PANEL
RDG-LNA (01)	M2.6X0.45	1.6~2.0
RDG-LNA-W1 (01)		0.8~1.2
RDG-LNA-W2 (01)		0~0.4
RDG-LNA (4-40) (01)	No. 4-40UNC	1.6~2.0
RDG-LNA (4-40)-W1 (01)		0.8~1.2
RDG-LNA (4-40)-W2 (01)		0~0.4

3	PBT	UL94V-0(BLACK)			
2	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2 μ m	5	PHOSPHOR BRONZE	TIN PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2 μ m	4	STEEL	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-002464	DESIGNED MT. ITANO
HIROSE ELECTRIC CO., LTD.		APPROVED : HO. MIWA	05.01.05	DRAWING NO. EDC3-047708-03	
		CHECKED : YH. ENAMI	05.01.05	PART NO. RDBD-25SE1/M2.6(55)	
		DESIGNED : TU. TANIGUCHI	05.01.05	CODE NO. CL211-5197-4-55	
		DRAWN : TU. TANIGUCHI	05.01.05		
					DATE 08.10.07