
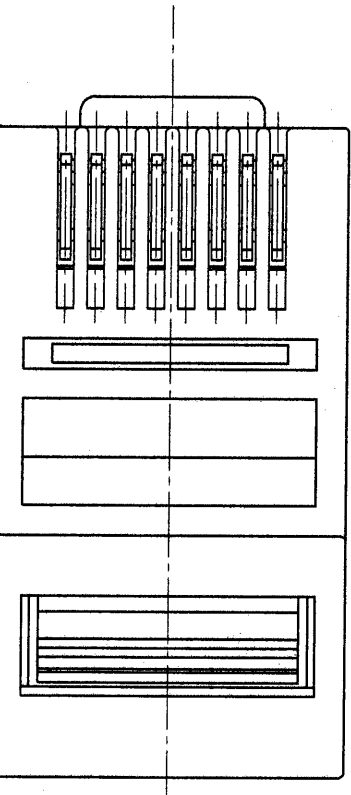


TABLE-1

APPLICABLE CABLE	
	<p>* THE CABLE SHOWN IN THE FIGURE LEFT IS ONE OF THE SAMPLE.</p> <p>* OUTER DIAMETER OF VINYL-JACKET CHANGES ACCORDING TO ITS HARNESS SO THE DIMENSION IN THE FIGURE FOR REFERENCE.</p>

3 ATTACHED

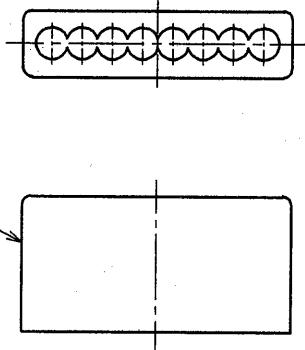

NOTES

- 1 THE DIMENSION IN PARENTHESIS ARE FOR REFERENCE.
- 2 APPLICABLE CABLE OF THIS CONNECTOR IS SHOWN IN TABLE-1.
- 3 THE ATTACHED SHALL BE USED TO ALIGN WIRES. (CABLE SHALL BE ASSEMBLED WITH ADAPTOR INSERTED)
- 4 USE THE JIGS SHOWN IN TABLE-2 FOR WIRING THIS CONNECTOR.

TABLE-2

EQUIPMENT	PART No.
SEMI-AUTO ASSEMBLY MACHINE	APPLICATOR 105 TM8/10P88
HAND TOOL	TC-2220-8/10P-88

2	PHOSPHOR BRONZE SELECTIVE GOLD PLATING 1.27μm(B AREA)				
1	POLYCARBONATE CLEAR	3	POLYCARBONATE CLEAR		
NO.		MATERIAL		FINISH, REMARKS	
CODE NO. (OLD)		DRAWN		DESIGNED	
		T. Watanabe		H. Mizuno	
		'95.7.10		'95.7.10	
				95.7.10	
				APPROVED	
				RELEASED	
DRAWING NO. EDC3-028188		PART NO. TM10P-88P			
SCALE 4 : 1		UNITS mm			
HRS		HIROSE ELECTRIC CO., LTD.		CODE NO. CL222-1818-1	
				FORM No. 229	

TO	
Q2	