

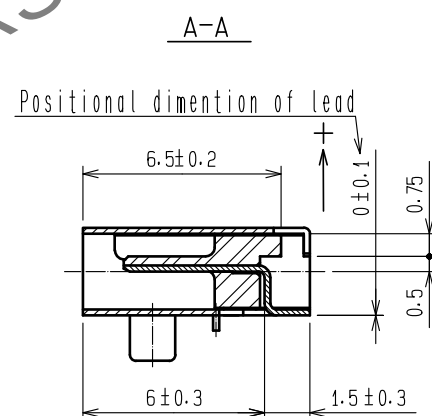
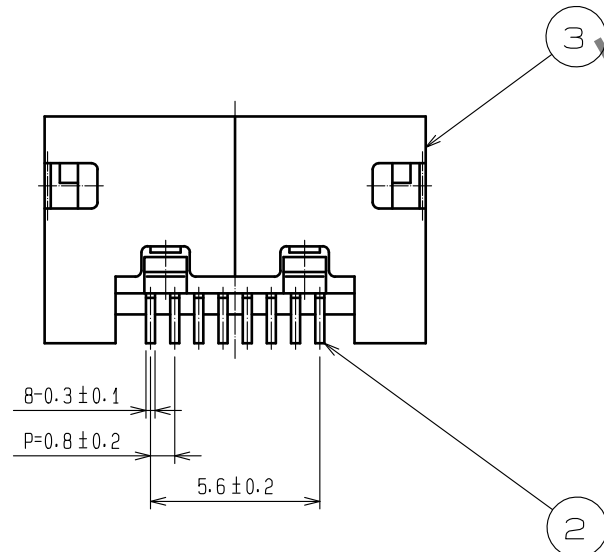
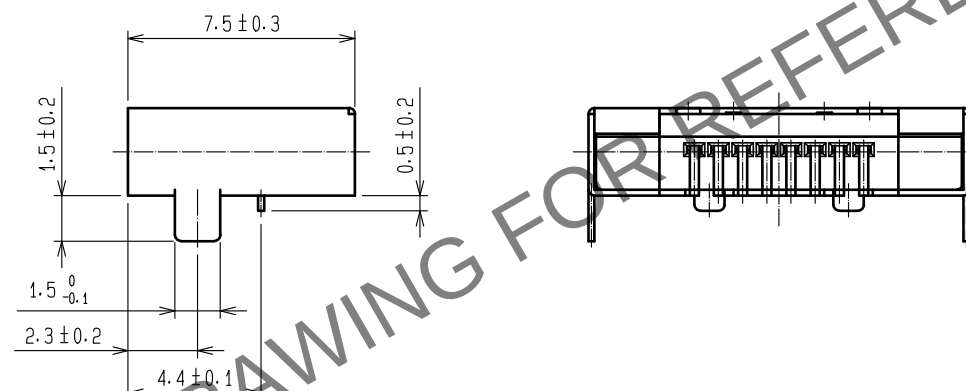
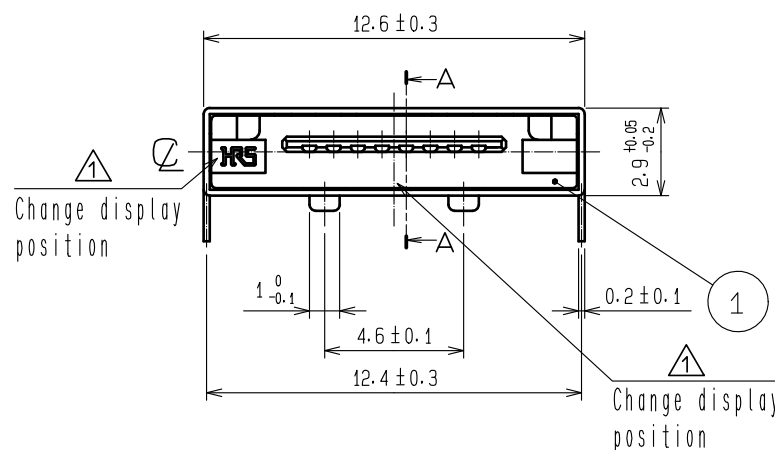
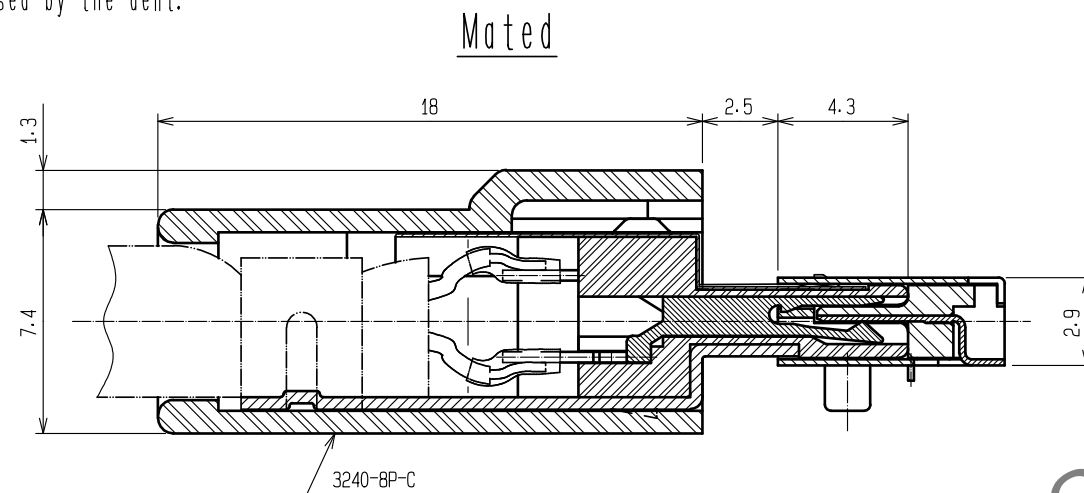


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A
B
C
D
E
F

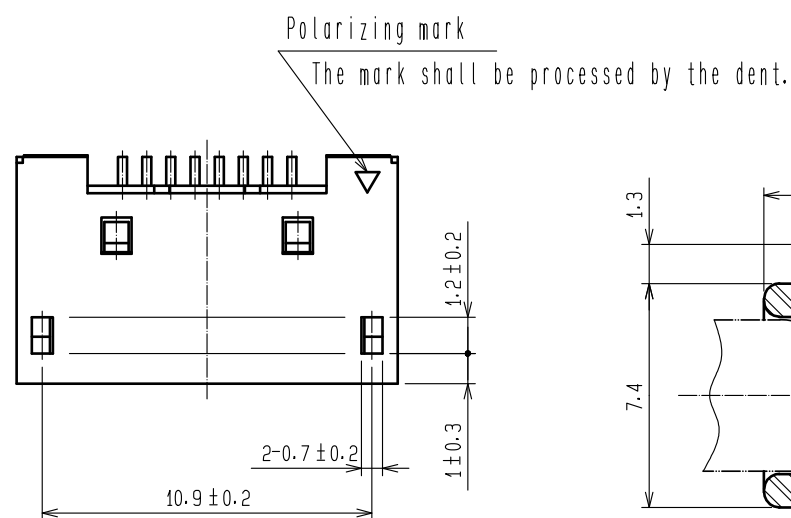

Recommended PC Board pattern
(Mounting side)

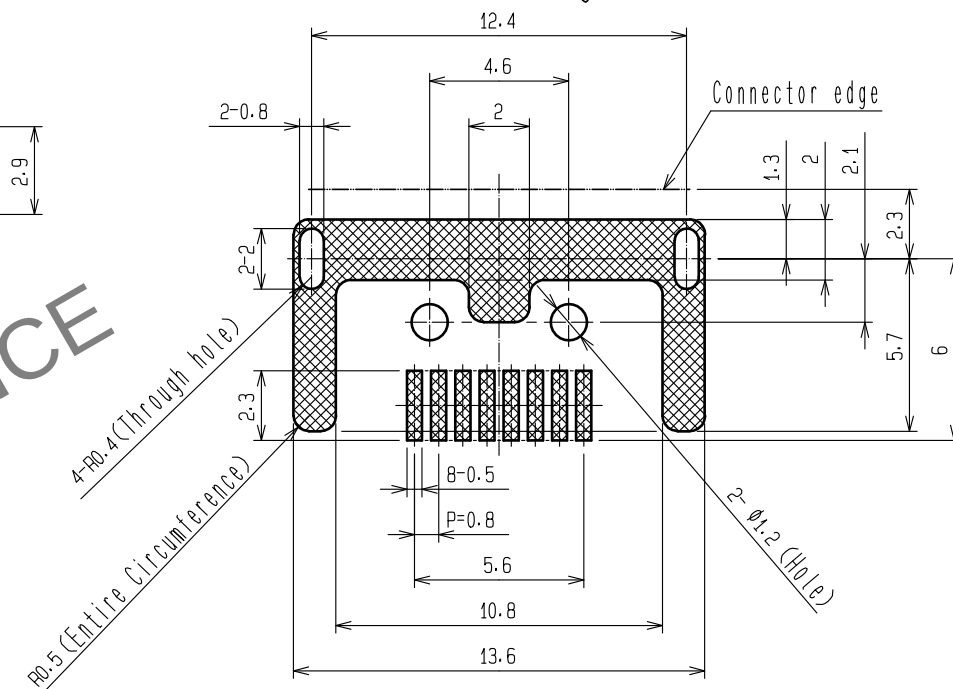

- Notes 1. Lead coplanarity to be 0.1 max.
2. All dimensions without tolerance are dimensions for reference.

1	PPS	UL94V-0 (BLACK)	3	STAINLESS STEEL	SELECTIVE AREA : GOLD 0.03µm MIN. UNDER PLATING : NICKEL 0.2µm MIN.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2µm MIN. LEAD AREA : GOLD 0.03µm MIN. UNDER PLATING : NICKEL 2µm MIN.	2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.2µm MIN. LEAD AREA : GOLD 0.03µm MIN. UNDER PLATING : NICKEL 2µm MIN.
UNITS mm		SCALE 4 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-00002550	DESIGNED TA. TORIHARA
		APPROVED : AO. SUZUKI	20060510	DRAWING NO. EDC3-046586-02	CHECKED MN. KENJO
HIROSE ELECTRIC CO., LTD.		CHECKED : NF. MIYAZAKI	20060510	PART NO. 3260-8S3(55)	DATE 20190920
		DESIGNED : HN. ANDO	20060510	CODE NO. CL232-0010-5-55	
		DRAWN : HN. ANDO	20060510		