




△ A list of compatible cables is available on the Hirose website.
When using a non-recommended cable, please contact a Hirose sales representative.
Refer to the technical specification (ETAD-E3164) for wiring and assembly procedures.

△5 Recommended Cable △5



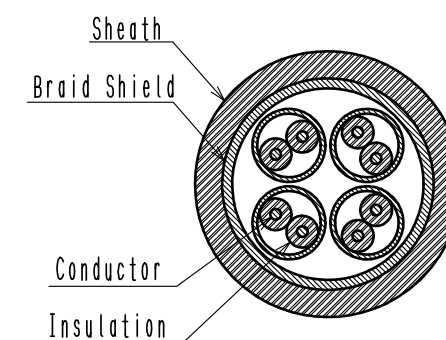



△ Mating Key




Type B

5 3


3	Stainless Steel		7	PC	Dark gray. UL94V-0			
2	PA	Black. UL94V-0	6	Stainless Steel	Nickel 0.2 μm min			
1	Copper Alloy	Contact area : Gold 0.2 μm min Wiring area : Gold 0.03 μm min Under plating : Nickel 2 μm min	5	Stainless Steel	Nickel 1μm min			
			4	PA	Black. UL94V-0			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1	COUNT  6	DESCRIPTION OF REVISIONS DIS-E-00006884		DESIGNED MT. YASUDA	CHECKED KI. KAGOTANI	DATE 20210921
 HIROSE ELECTRIC CO., LTD.	APPROVED +RI. TAKAYASU		20170328	DRAWING NO. EDC-129507-00-00				
	CHECKED +KI. NAGANUMA		20170327	PART NO. IX40G-B-10S-CV(7.0)				
	DESIGNED +TS. SAKAIZAWA		20170327	CODE NO. CL0251-0032-0-00				
	DRAWN +TS. SAKAIZAWA		20170327	 				

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

3 Shield Shell Delivery Form

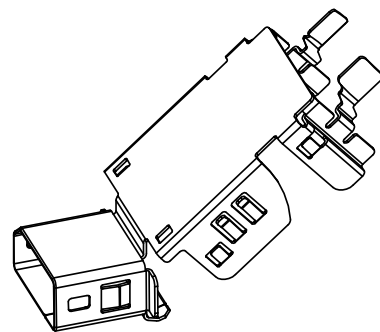


3 Product Structure

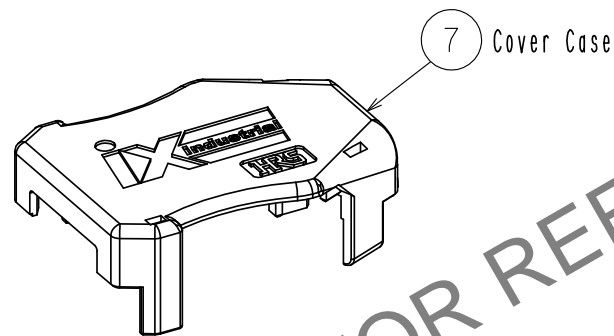


7 Cover Case


Plug Unit




Shield Shell 6

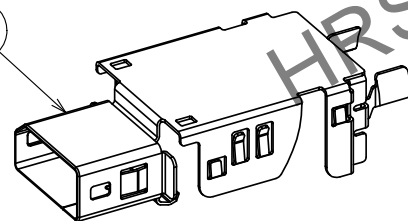




5 Shield Case

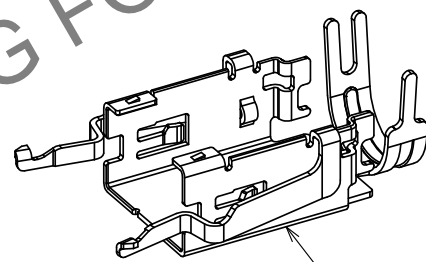


7 Cover Case

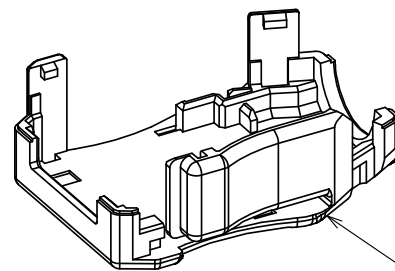

Plug Unit

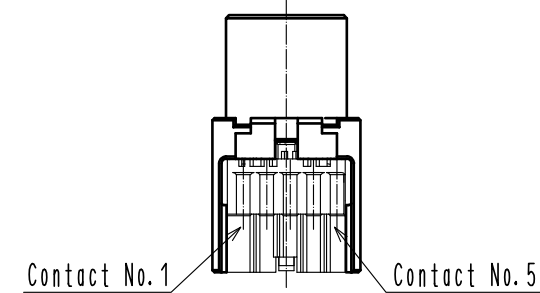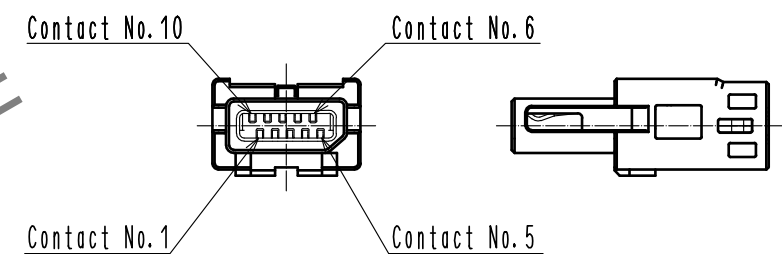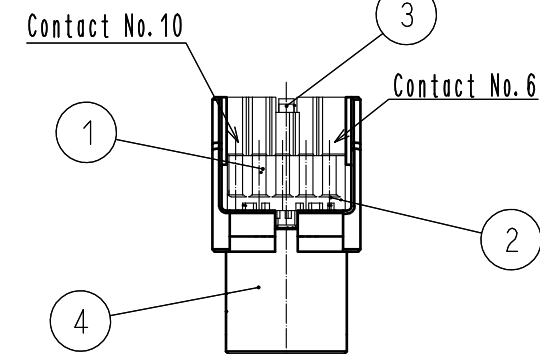

Mated Condition

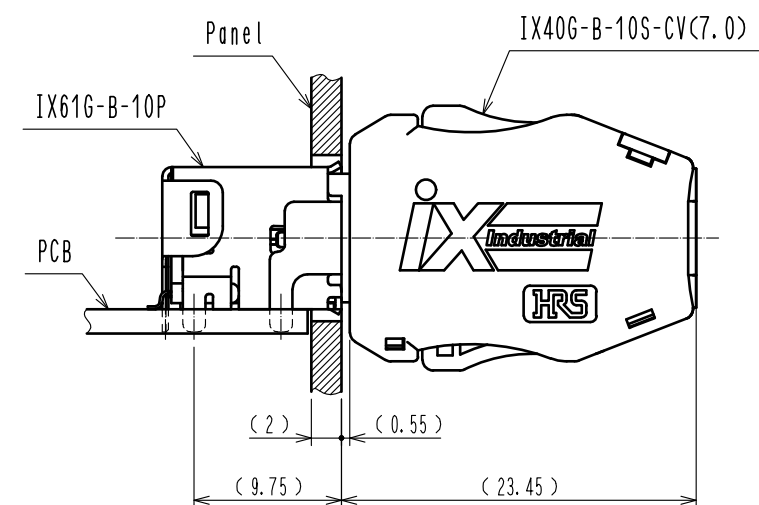

DRAWING NO.	EDC-129507-00-00
PART NO.	IX40G-B-10S-CV(7.0)
CODE NO.	CL0251-0032-0-00

